

Temperature


A-Level Physics

Thermal equilibrium

Heat 热量 (thermal energy) flows from a **higher temperature** to a **lower temperature**. When two bodies touch, energy moves until their temperatures are equal—they reach **thermal equilibrium** 热平衡. At equilibrium there is no net flow of energy.


Two regions at the **same temperature** 温度 are in thermal equilibrium with each other—no net energy flows, even though particles still exchange energy.

Temperature decides the **direction** of heat flow. It is not a measure of how much **thermal energy** 热能 a body holds. A small cup of boiling water (100 °C) holds far less energy than a swimming pool at 25 °C, but a piece of metal put in the cup gains energy while one put in the pool loses it.

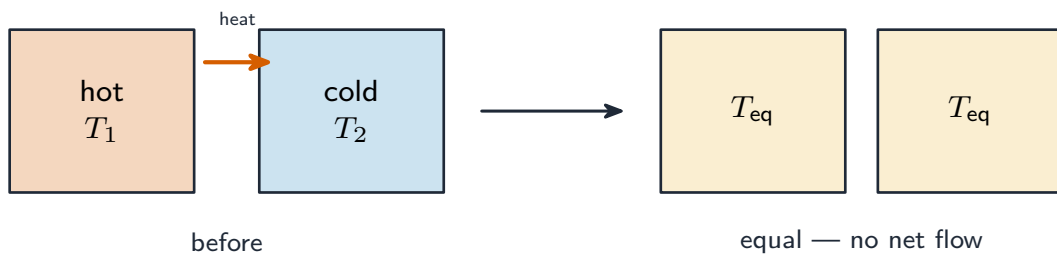

Heat flows from hot to cold until both reach the same temperature—thermal equilibrium

Measuring temperature

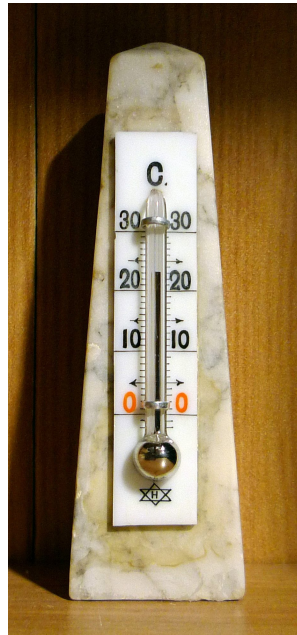


A thermometer measures temperature on a defined scale.

Image: Anonimski, CC BY-SA 3.0 (commons.wikimedia.org)


Any physical property that **changes in a repeatable way with temperature** can make a **thermometer** 温度计. Examples:

- **density of a liquid** —a liquid-in-glass thermometer (mercury or alcohol). As the temperature rises, the liquid expands and rises up a narrow **capillary** 毛细管.
- **volume of a gas at constant pressure** —a gas thermometer. The gas volume rises in step with the absolute temperature.
- **resistance of a metal** —a resistance thermometer. A metal's **resistance** 电阻 rises nearly in step with temperature over a wide range.
- **e.m.f. of a thermocouple** —a **thermocouple** 热电偶 is two different metals joined at two points; the **electromotive force** 电动势 it makes depends on the temperature difference between the joins.

Different thermometers can read slightly differently if the property does not change in a straight line; they agree only at the **calibration** 校准 points.

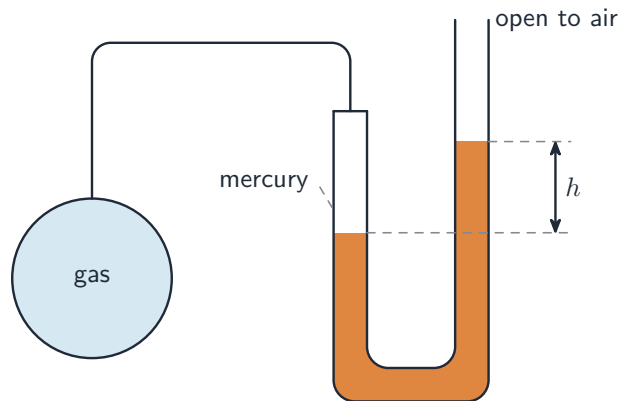

A constant-volume gas thermometer —the gas pressure is found from the height difference h

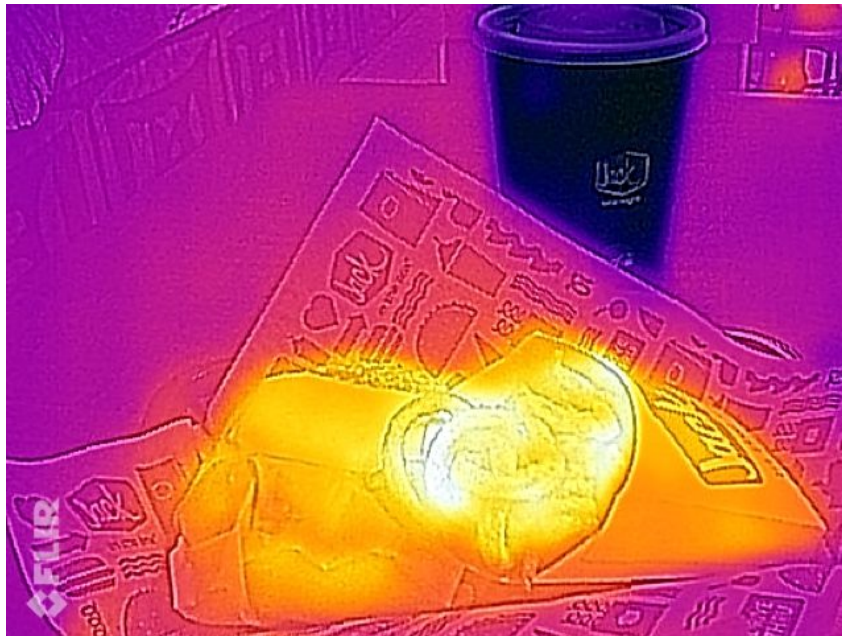

A thermal (infrared) camera maps temperature to colour: the hot fries glow bright orange, the cold drink stays dark


Image: Daniel Ramirez from Honolulu, USA, CC BY 2.0 (commons.wikimedia.org)

Thermodynamic temperature scale

The **thermodynamic temperature** 热力学温度 (or **absolute temperature** 绝对温度) scale does not depend on any one substance —only on the laws of thermodynamics. Its unit is the **kelvin** 开尔文 (K).

Absolute zero

The lowest possible temperature is **zero kelvin** (0 K), called **absolute zero** 绝对零度. There a system has its least possible **internal energy** 内能—particles have no random motion to speak of. Nothing can be cooled below this.

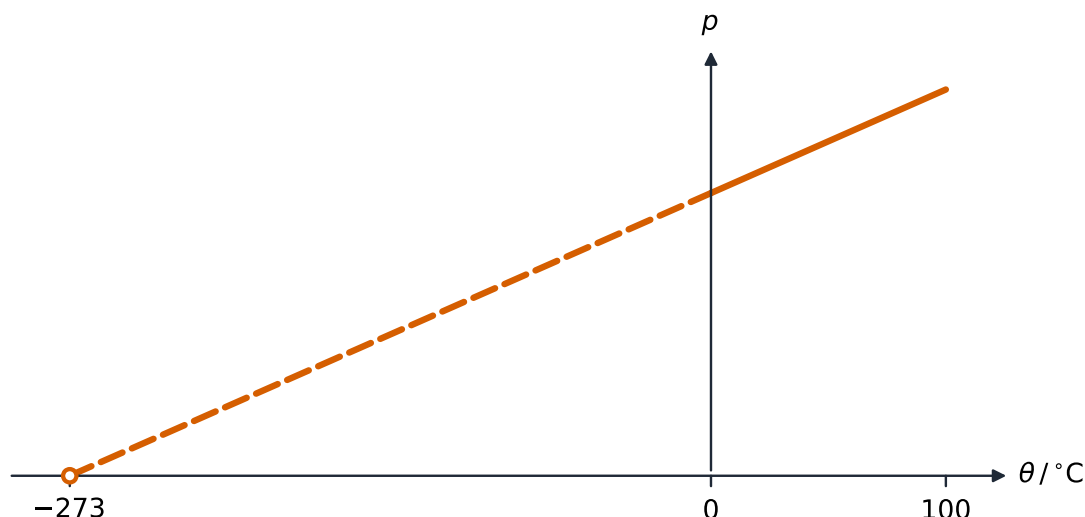

Extrapolating the pressure–temperature line back to zero pressure gives absolute zero, about $-273\text{ }^{\circ}\text{C}$

Celsius scale

The **Celsius** 摄氏度 scale θ is shifted from the thermodynamic scale by a fixed amount:

$$T/\text{K} = \theta/^{\circ}\text{C} + 273.15.$$

So $0\text{ }^{\circ}\text{C} = 273.15\text{ K}$ and $100\text{ }^{\circ}\text{C} = 373.15\text{ K}$. A kelvin and a degree Celsius are the **same size**, so a temperature **difference** of 1 K equals $1\text{ }^{\circ}\text{C}$ —but the absolute values differ by 273.15.

In gas-law calculations you must always use **absolute** temperatures in kelvin. Using $^{\circ}\text{C}$ gives wrong answers.

Specific heat capacity


The **specific heat capacity** 比热容 c of a substance is the **energy** 能量 needed to raise the temperature of **unit mass** by **one kelvin**:

$$c = \frac{Q}{m\Delta T} \quad \Longleftrightarrow \quad Q = mc\Delta T.$$

Unit: $\text{J kg}^{-1} \text{ K}^{-1}$.

Examples:

- water: $c \approx 4200\text{ J kg}^{-1} \text{ K}^{-1}$ (high —why water is a good coolant and why oceans steady the climate).
- aluminium: $c \approx 900\text{ J kg}^{-1} \text{ K}^{-1}$.
- copper: $c \approx 385\text{ J kg}^{-1} \text{ K}^{-1}$.

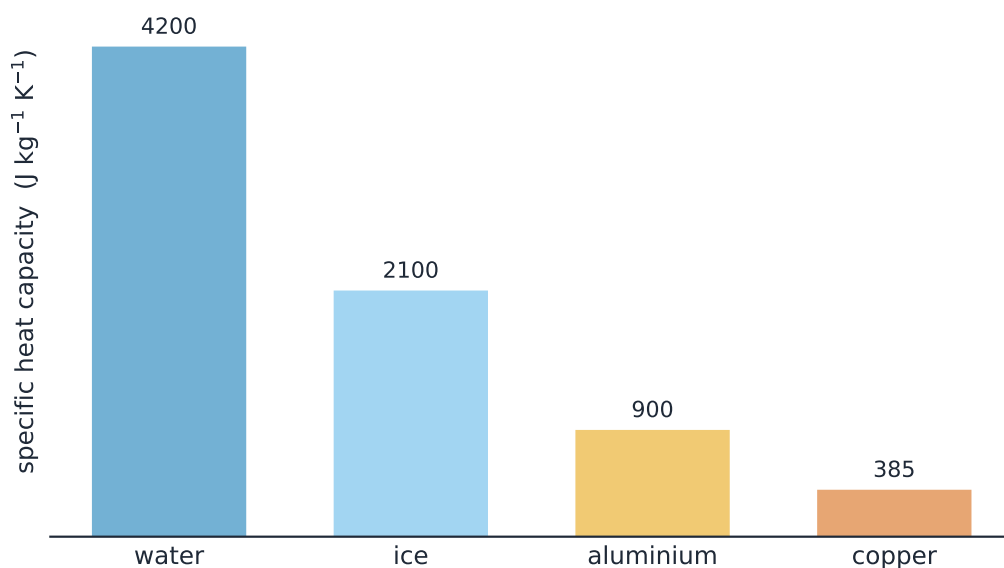

Water's specific heat capacity is far higher than common solids —why it is such a good coolant

To find an unknown c by experiment: supply known energy Q electrically ($Q = VIt$, from the **power** 功率), then measure the temperature rise ΔT of a known **mass** 质量 m . Then $c = Q/(m\Delta T)$. Reduce heat loss with **insulation** 隔热 and use a rise of about 10 K (big enough to measure well, small enough to limit losses).

Worked example. How much energy is needed to heat 0.50 kg of water from 20 °C to 100 °C? (Specific heat capacity of water $c = 4200 \text{ J kg}^{-1} \text{ K}^{-1}$.)

A temperature difference is the same in K and °C, so $\Delta T = 80$:

$$Q = mc\Delta T = 0.50 \times 4200 \times 80 = 1.68 \times 10^5 \text{ J} (= 168 \text{ kJ}).$$

When two bodies reach thermal equilibrium with no heat lost to the surroundings, the energy gained by the colder one equals the energy lost by the hotter one:

$$m_1 c_1 (T_{\text{eq}} - T_1) = m_2 c_2 (T_2 - T_{\text{eq}}).$$

Worked example. 0.20 kg of water at 80 °C is mixed with 0.30 kg of water at 20 °C, with no heat lost. Find the final temperature.

The heat lost by the hot water equals the heat gained by the cold water (the c of water cancels):

$$0.20 (80 - T_{\text{eq}}) = 0.30 (T_{\text{eq}} - 20) \quad \Rightarrow \quad T_{\text{eq}} = 44 \text{ °C}.$$

Specific latent heat

When a substance changes state (solid → liquid, or liquid → gas) at constant temperature, energy must be supplied (or removed) with **no** temperature change. This energy is the **latent heat** 潜热.

The **specific latent heat** 比潜热 L is the energy to change the state of **unit mass** at constant temperature:


$$L = \frac{Q}{m} \quad \Longleftrightarrow \quad Q = mL.$$

Unit: J kg^{-1} .

Two kinds:

- **specific latent heat of fusion** 融化 L_f —for melting or freezing (solid → liquid).
- **specific latent heat of vaporisation** 汽化 L_v —for boiling or condensing (liquid → gas).

For water at atmospheric pressure: $L_f \approx 3.34 \times 10^5 \text{ J kg}^{-1}$ (at 0°C); $L_v \approx 2.26 \times 10^6 \text{ J kg}^{-1}$ (at 100°C). So L_v is about 7 times L_f .

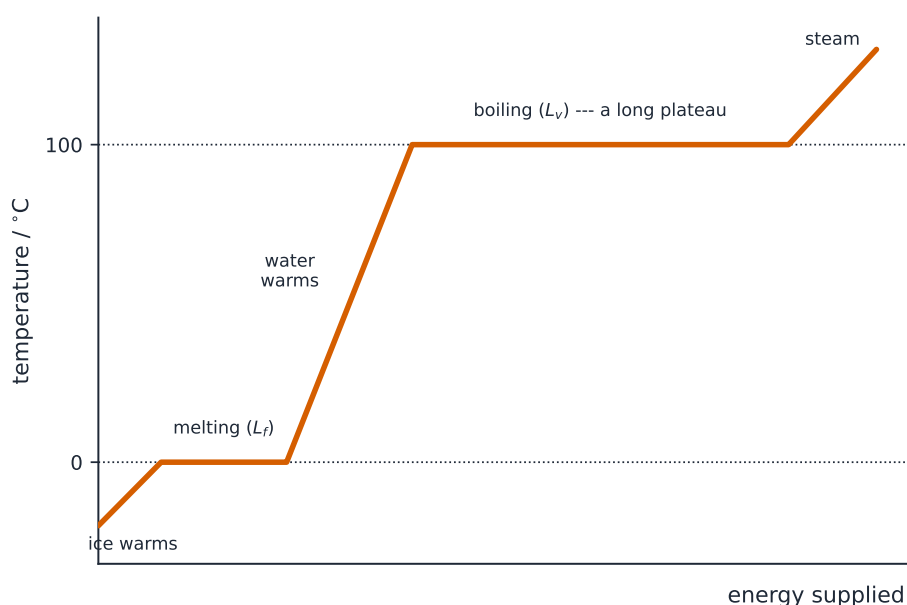

Heating curve: the sloped parts warm the substance ($mc\Delta T$); the flat plateaus are the phase changes (mL)

Worked example. A 2.0 kW heater boils water already at 100°C . How long does it take to turn 0.10 kg of this water into steam? ($L_v = 2.26 \times 10^6 \text{ J kg}^{-1}$, no heat lost.)

The energy needed is $Q = mL_v = 0.10 \times 2.26 \times 10^6 = 2.26 \times 10^5 \text{ J}$. From $Q = Pt$,

$$t = \frac{Q}{P} = \frac{2.26 \times 10^5}{2000} \approx 110 \text{ s}.$$

Why $L_v > L_f$

Two reasons, both from the particle picture of matter:


1. **Bonds:** in melting, only some of the **intermolecular** 分子间 bonds break; the particles stay close as a liquid. In boiling, **all** the bonds must break so the particles can separate. Breaking all of them needs more energy.
2. **Work against the atmosphere:** when a liquid turns to gas it expands hugely (vapour has about 10^3 times the liquid's **volume** 体积), so it does work pushing back the surrounding **atmospheric pressure** 大气压强. That work comes from the energy supplied.

Multi-step problems

If a problem mixes temperature change and a **phase change** 相变 (e.g. ice at -5°C warming to water at 30°C):

1. heat the solid from -5°C to 0°C : $Q_1 = mc_{\text{ice}} \times 5$.
2. melt at 0°C : $Q_2 = mL_f$.
3. heat the water from 0°C to 30°C : $Q_3 = mc_{\text{water}} \times 30$.

Total: $Q_1 + Q_2 + Q_3$. A phase change is at constant temperature, so use mL there, not $mc\Delta T$.

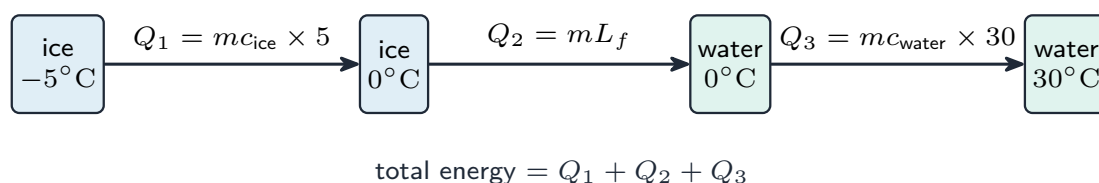

Split a mixed problem into stages —warm, change state, warm —then add the energies

When a question gives heater power P and asks for the time, use $Q = Pt$ (assuming no heat loss). Insulating (lagging) the container and using a small mass are common ways to improve the experiment.

Exam tips

- **Thermal equilibrium** means no net heat flow (equal temperature); the thermodynamic scale is fixed by absolute zero and the triple point.
- Convert temperatures with $T/\text{K} = \theta/^\circ\text{C} + 273.15$ and use **kelvin** in energy and gas equations.
- Use $Q = mc\Delta T$ for heating and $Q = mL$ for a change of state (no temperature change) —never mix the two.