

4.1 Central Processing Unit (CPU) Architecture

Name: _____ Class: _____ Date: _____

Total: 41 marks

KEY WORDS register • von neumann • accumulator
• control unit • memory data register

Objective

Build the skills to answer exam questions on **CPU architecture** – the Von Neumann model, the registers, the buses, and the fetch–execute cycle.

You must be able to:


- explain the **Von Neumann** model and the **stored-program** concept
- state the role of the **registers**, the **ALU**, the **control unit** and the clock
- explain the **address**, **data** and **control buses**
- describe the stages of the **fetch–execute cycle** and the purpose of **interrupts**

1 Key knowledge and worked examples

Study these first. Each one shows the method for a question type used later – follow the steps and you can do the Practice and Exam-style questions yourself.

■ Von Neumann model and registers

In the **Von Neumann** model one memory holds **both program and data** (the **stored-program** idea), and the CPU runs the instructions one at a time, in order, unless a branch changes the flow.

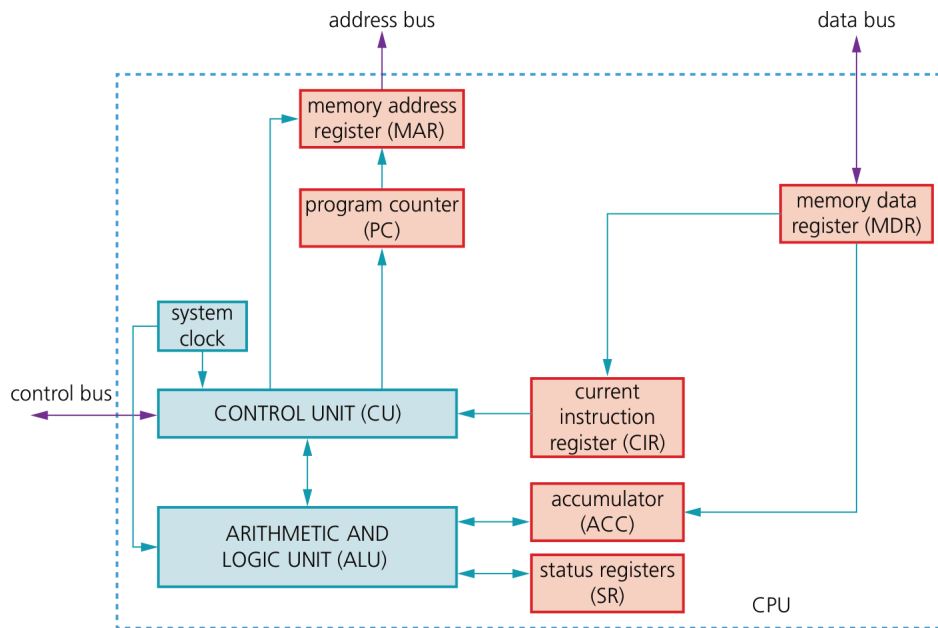


Registers are tiny, very fast stores inside the CPU. Each special-purpose register has a fixed job:

Register	Holds
PC (program counter)	address of the next instruction
MAR (memory address register)	the address being read/written
MDR (memory data register)	the data going to/from memory
CIR (current instruction register)	the instruction being decoded
ACC (accumulator)	the value the ALU is working on
IX (index register)	a value added to a base address (indexed addressing)

The **ALU** does arithmetic and logic; the **control unit** decodes instructions and sends control signals; the **clock** keeps everything in step.


■ The three buses

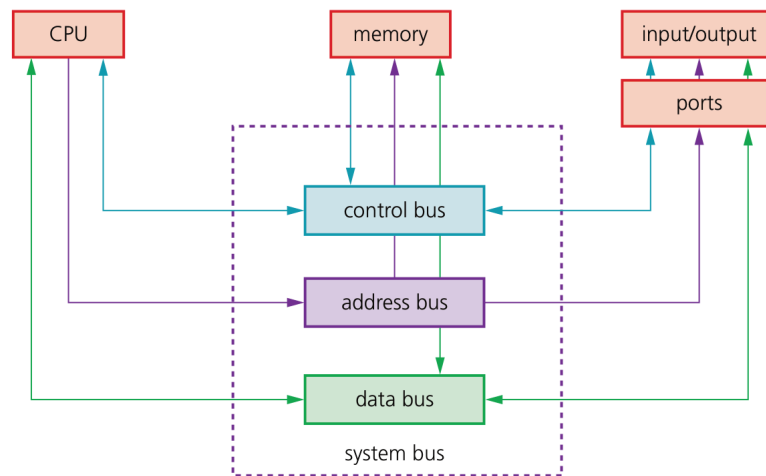

The **address bus** is **one-way** (the CPU only ever *sends* an address to memory); the **data** and **control** buses are **two-way**. The **width** of a bus matters: a wider **data bus** carries more bits per transfer (faster), and a wider **address bus** can address **more** memory locations (each extra line doubles the number of addresses).

■ The fetch–execute cycle

Every instruction goes through the same three stages, then the cycle repeats:

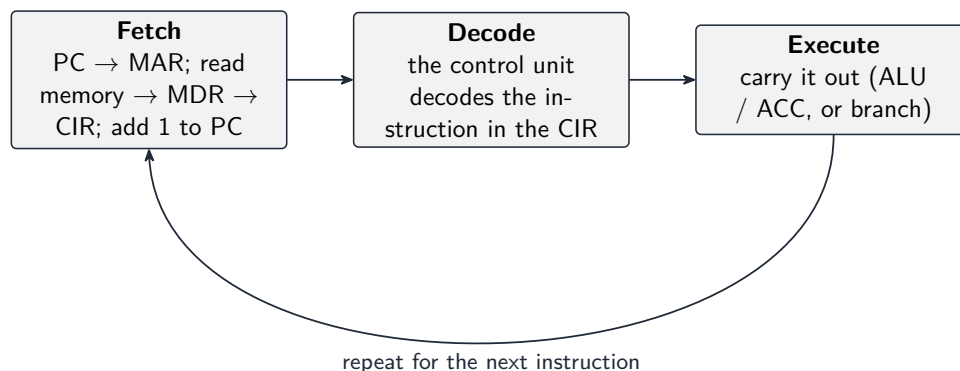

An **interrupt** is a signal that makes the CPU pause the current program, run a service routine, then return – so urgent events are handled quickly.

■ Key knowledge: full processor questions

- **SR** holds status flags; **IX** holds an offset added to an address. Main memory (IAS) holds instructions and data. General-purpose registers hold working values; special-purpose registers have defined roles.
- Fetch notation: $MAR \leftarrow [PC]$, $PC \leftarrow [PC] + 1$, $MDR \leftarrow [[MAR]]$, $CIR \leftarrow [MDR]$; then decode and execute. Brackets denote contents; double brackets denote memory contents at the address.
- Interrupt: finish the current instruction; check priority; save PC/register state; load the ISR address into PC; service the event; restore state and resume. Hard-


ware examples include a timer or peripheral request; software examples include a service request or an exception.

- Higher clock frequency can increase instruction rate; architecture and cycles per instruction also matter. More cores help parallel tasks; a wider data bus transfers more bits; a wider address bus addresses more locations; cache reduces slower main-memory access.
- **USB**: bidirectional data and power to peripherals. **HDMI**: digital video and audio. **VGA**: analogue video, without audio.

2 Practice

Now apply the methods above.


2.1 State what the **stored-program concept** means. [1]




2.2 State the role of the **PC** and the **MAR**. [2]




2.3 State the difference between a **general-purpose** and a **special-purpose** register. [2]



2.4 State which bus is **one-way**, and explain why. [2]




2.5 An interrupt arrives while an instruction is executing. Describe how the processor handles it and then continues the interrupted program. [5]

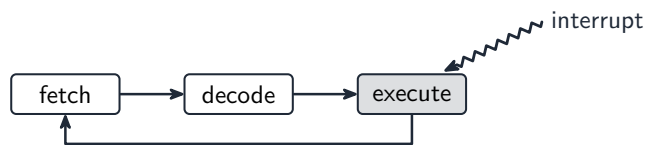

3 Exam-style questions

3.1 Describe the stages of the **fetch–execute cycle**. [4]

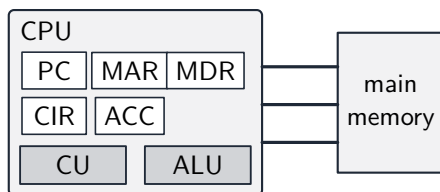


3.2 (a) State the role of the **ALU** and the **control unit**. [2]




(b) State **two** factors that affect the performance of a CPU. [2]


3.3 Explain the purpose of an **interrupt**. [2]



3.4 During the fetch stage, describe the roles of the **MAR** and the **MDR**. [2]



3.5 A computer is redesigned with a **wider address bus**. Explain the effect this has on the computer. [2]




3.6 A processor has four cores, a clock speed of 3.2 GHz and a small amount of cache memory.

(a) **Complete** the table by describing the role of each register. [4]

register	role
Program Counter (PC)	
Memory Address Register (MAR)	
Memory Data Register (MDR)	
Current Instruction Register (CIR)	

(b) **Explain** how increasing the **number of cores** can improve performance, and **give** one reason why four cores rarely make a program four times faster. [3]



(c) **Explain** how increasing the amount of **cache** improves performance. [2]

(d) **State** three differences between **Dynamic RAM** and **Static RAM**, and **identify** which is normally used for cache. [4]

(e) A second processor has the same clock speed but a **wider** data bus. **Explain** the effect on performance. [2]

