

3.1 Computers and their components

Name: _____ Class: _____ Date: _____ **Total: 42 marks**

KEY WORDS sensor 传感器 • buffer 缓冲区 • sram 静态 RAM • control system 控制系统
• embedded system 嵌入式系统

Objective

Build the skills to answer exam questions on **computer components** 计算机组件 — input, output, memory and storage; the types of RAM and ROM; embedded systems; and monitoring and control systems.

You must be able to:

- explain the need for **input**, **output**, **primary memory** 主存储器 and **secondary storage** 辅助存储器
- explain the differences between **RAM** and **ROM**, **SRAM** and **DRAM**, and the types of ROM
- describe **embedded systems** 嵌入式系统 and their benefits and drawbacks
- describe **monitoring and control** systems using **sensors** 传感器, **actuators** 执行器 and **feedback** 反馈

1 Worked examples

Study these first. Each one shows the method for a question type used later — follow the steps and you can do the Practice and Exam-style questions yourself.

■ The four building blocks

Block	Job	Examples
input	get data in	keyboard, mouse, sensor
output	give results out	monitor, speaker, actuator
primary memory	fast store the CPU uses directly	RAM, ROM
secondary storage	large, keeps data when off	hard disk, SSD, USB

■ RAM, ROM and their types

RAM holds the running program and data and is **volatile** (lost when power is off). **ROM** holds fixed start-up data and is **non-volatile** (kept).

	RAM	ROM
Keeps data without power?	no (volatile)	yes
Can the CPU write to it?	yes	normally no
Used for	running programs	start-up / firmware

- **SRAM vs DRAM:** SRAM is faster and needs no refreshing, so it is used for **cache**; DRAM is cheaper and denser, so it is used for **main memory** (but must be refreshed).
- **ROM types:** **PROM** is written once; **EPROM** is erased by UV light and rewritten; **EEPROM** is erased and rewritten **electrically**, in place.

■ Processor performance


Three things make a CPU run programs faster:


- **clock speed** 时钟速度 — more cycles per second means more instructions per second.
- **number of cores** 核心 — each core can run instructions, so more cores do more work **at the same time** — *but only if the software is written to use them*, and more cores cost more and make more heat.
- **cache** 缓存 — a small, very fast memory near the CPU; more cache means fewer slow trips to main memory.

A **buffer** 缓冲区 is a small temporary store that holds data while a slow device (such as a printer) catches up, so the CPU does not have to wait for it.

■ Monitoring and control

In **monitoring** the system only reports readings; in **control** it also acts to change the process. A control system uses **feedback** — the change it makes affects the next reading:

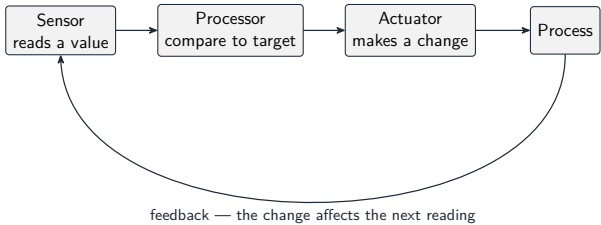

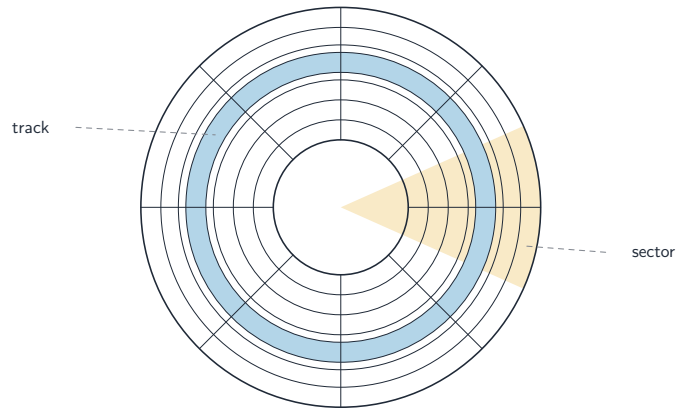

A hard disk drive stores data in tracks and sectors

An **embedded system** is a computer built into another device for one fixed job (washing machine, car engine unit). It is small, cheap and reliable, but limited to that task and hard to update.

2 Practice

Now apply the methods above.

2.1 State the difference between **primary memory** and **secondary storage**. [2]

2.2 State **two** differences between **RAM** and **ROM**. [2]

2.3 Give one **benefit** and one **drawback** of an embedded system. [2]

2.4 Name the component in a control system that **makes a physical change** to the process. [1]

3 Exam-style questions

3.1 (a) Explain the difference between RAM and ROM. [2]

(b) Give one use of ROM in a computer. [1]

3.2 Explain why **SRAM** is used for cache memory while **DRAM** is used for main memory. [3]

3.3 State the difference between **PROM**, **EPROM** and **EEPROM**. [3]

3.4 A greenhouse control system keeps the temperature near 25 °C.

(a) Name a suitable **sensor** for this system. [1]

(b) Describe how the system uses **feedback** to keep the temperature steady. [3]

3.5 Describe the principal operation of **either** a laser printer **or** a 3D printer. [3]

3.6 A computer is upgraded from a single-core to a quad-core processor.

(a) Explain how having more **cores** can improve performance. [2]

(b) State **one** reason the performance may **not** improve as much as expected. [1]

3.7 A computer sends documents to a printer, which prints much more slowly than the computer can send. State why the printer needs a **buffer**. [2]

3.8 A greenhouse uses a computer system to look after tomato plants. Sensors measure temperature, humidity and soil moisture. A separate 3D printer in the same building makes replacement clips for the plant supports.

(a) **Describe** the difference between a **monitoring** system and a **control** system, using this greenhouse as your example. [3]

(b) The greenhouse system opens a vent when the temperature exceeds 28 °C. **Explain** the role of the **actuator** and of the **ADC** in this system. [3]

(c) **Explain** why the system takes readings **continuously** in a loop rather than once an hour. [2]

(d) **Explain** how the 3D printer produces a clip from a design file. [3]

(e) **State** why the 3D printer needs a **buffer**, and **explain** what would happen without one. [3]
