

3(a) **One mark** per bullet point, **max 2** marks

- (A NAND B) **and** (NOT A OR NOT C)
- XOR and NOT

3(b) **1 mark** per bullet point, **max 2** marks

- One correct term: (R AND S AND NOT T)  
// (NOT R AND NOT S AND T)
- Second correct term **plus** the OR in correct place

Answer:  
Q = (R AND S AND NOT T) OR (NOT R AND NOT S AND T)

3(a) **1 mark** per shaded area, **max 2** marks

| A | B | C |  | X |
|---|---|---|--|---|
| 0 | 0 | 0 |  | 1 |
| 0 | 0 | 1 |  | 0 |
| 0 | 1 | 0 |  | 1 |
| 0 | 1 | 1 |  | 1 |
| 1 | 0 | 0 |  | 1 |
| 1 | 0 | 1 |  | 1 |
| 1 | 1 | 0 |  | 1 |
| 1 | 1 | 1 |  | 1 |

3(b) **1 mark** per bullet point, **max 2** marks

- A AND B OR C
- C NOR D and final two gates

6(a)

- **One** mark for working, (all four columns P, Q, R and S)
- **One** mark for first four rows of column Z
- **One** mark for second four rows of column Z

| Working space |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|
| A             | B | C | P | Q | R | S | Z |
| 0             | 0 | 0 | 1 | 1 | 0 | 0 | 1 |
| 0             | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| 0             | 1 | 0 | 0 | 0 | 1 | 0 | 1 |
| 0             | 1 | 1 | 0 | 0 | 0 | 0 | 0 |
| 1             | 0 | 0 | 1 | 0 | 0 | 0 | 1 |
| 1             | 0 | 1 | 1 | 0 | 1 | 0 | 1 |
| 1             | 1 | 0 | 0 | 1 | 1 | 0 | 1 |
| 1             | 1 | 1 | 0 | 1 | 0 | 0 | 0 |

6(b)(i)

- Two** marks if no errors present  
**One** mark if only one error present

| A | BC |    |    |    |
|---|----|----|----|----|
|   | 00 | 01 | 11 | 10 |
| 0 | 0  | 1  | 1  | 0  |
| 1 | 0  | 1  | 0  | 1  |

6(b)(ii)

- One** mark for each correct loop (**Max 2**)

| A | BC |    |    |    |
|---|----|----|----|----|
|   | 00 | 01 | 11 | 10 |
| 0 | 0  | 1  | 1  | 0  |
| 1 | 0  | 1  | 0  | 1  |

6(b)(iii)

- One** mark for each mark point (**Max 2**)
- One correct Boolean term with a + / OR sign
  - All Boolean terms and operators correct and no other terms present

$$\bar{A}.C + \bar{B}.C + A.B.\bar{C}$$

1(a)

**1 mark** each:

$$X = Q \text{ AND } (\text{NOT } P \text{ OR } R)$$

$$Y = S \text{ XOR } (Q \text{ NOR } R)$$

1(b)

**1 mark** for first 4 rows, **1 mark** for second 4 rows

| A | B | C | Working space | X |
|---|---|---|---------------|---|
| 0 | 0 | 0 |               | 1 |
| 0 | 0 | 1 |               | 1 |
| 0 | 1 | 0 |               | 0 |
| 0 | 1 | 1 |               | 1 |
| 1 | 0 | 0 |               | 0 |
| 1 | 0 | 1 |               | 0 |
| 1 | 1 | 0 |               | 1 |
| 1 | 1 | 1 |               | 1 |

7(a)

**One** mark for working, (all four columns P, Q, R and S)  
**One** mark for first eight rows of column Z (Shaded)  
**One** mark for second eight rows of column Z (Unshaded)

|   |   |   |   | Working space |   |   |   | Z |
|---|---|---|---|---------------|---|---|---|---|
| A | B | C | D | P             | Q | R | S |   |
| 0 | 0 | 0 | 0 | 1             | 0 | 0 | 1 | 0 |
| 0 | 0 | 0 | 1 | 1             | 0 | 0 | 1 | 0 |
| 0 | 0 | 1 | 0 | 0             | 1 | 0 | 1 | 0 |
| 0 | 0 | 1 | 1 | 0             | 1 | 0 | 1 | 0 |
| 0 | 1 | 0 | 0 | 1             | 0 | 0 | 1 | 0 |
| 0 | 1 | 0 | 1 | 1             | 0 | 0 | 1 | 0 |
| 0 | 1 | 1 | 0 | 0             | 0 | 0 | 0 | 1 |
| 0 | 1 | 1 | 1 | 0             | 0 | 1 | 0 | 0 |
| 1 | 0 | 0 | 0 | 1             | 0 | 0 | 1 | 0 |
| 1 | 0 | 0 | 1 | 1             | 0 | 0 | 1 | 0 |
| 1 | 0 | 1 | 0 | 0             | 0 | 0 | 0 | 1 |
| 1 | 0 | 1 | 1 | 0             | 0 | 0 | 0 | 1 |
| 1 | 1 | 0 | 0 | 1             | 0 | 0 | 1 | 0 |
| 1 | 1 | 0 | 1 | 0             | 0 | 0 | 0 | 1 |
| 1 | 1 | 1 | 0 | 0             | 0 | 0 | 0 | 1 |
| 1 | 1 | 1 | 1 | 0             | 0 | 1 | 0 | 0 |

7(b)

**One** mark for correct answer (terms may be in any order)

$$Z = \bar{A}.B.C.\bar{D} + A.\bar{B}.C.\bar{D} + A.\bar{B}.C.D + A.B.C.\bar{D}$$

7(c)

**One** mark for each mark point

- Correct application of De Morgan's laws
- Correct application of Idempotent, Distributive or Absorption laws
- Correct application of Idempotent, Distributive or Absorption laws
- Correct final answer

$$(\overline{A+B}).(\overline{A.B+B.C})$$

$$(\bar{A}.\bar{B}).(\bar{A}+\bar{B}+\bar{C})$$

DeMorgan's laws

$$(\bar{A}.\bar{B}).(\bar{A}+\bar{B}+\bar{C})$$

Idempotent laws

$$(\bar{A}.\bar{A}+\bar{A}.\bar{B}+\bar{A}.\bar{C}).(\bar{B}.\bar{A}+\bar{B}.\bar{B}+\bar{B}.\bar{C})$$

Distributive laws

$$(\bar{A}+\bar{A}.\bar{B}+\bar{A}.\bar{C}).(\bar{A}.\bar{B}+\bar{B}+\bar{B}.\bar{C})$$

Idempotent laws

$$(\bar{A}+\bar{A}.\bar{C}).(\bar{B}+\bar{B}.\bar{C})$$

Absorption laws

$$\bar{A}.\bar{B} // A + B$$

Absorption laws / Final Answer

3(a)

**Two** marks for all **six** correct terms  
**One** mark for any **four** correct terms

$$Z = \bar{A}.\bar{B}.C.\bar{D} + \bar{A}.\bar{B}.C.D + \bar{A}.B.\bar{C}.\bar{D} + A.\bar{B}.C.\bar{D} + A.\bar{B}.C.D + A.B.\bar{C}.\bar{D}$$

3(b)(i)

**Two** marks if no errors present  
**One** mark if one error present

AB

| CD \ AB | 00 | 01 | 11 | 10 |
|---------|----|----|----|----|
| 00      | 0  | 1  | 1  | 0  |
| 01      | 0  | 0  | 0  | 0  |
| 11      | 1  | 0  | 0  | 1  |
| 10      | 1  | 0  | 0  | 1  |

3(b)(ii)

**One** mark for each correct loop (**Max 2**)

AB

| CD \ AB | 00 | 01 | 11 | 10 |
|---------|----|----|----|----|
| 00      | 0  | 1  | 1  | 0  |
| 01      | 0  | 0  | 0  | 0  |
| 11      | 1  | 0  | 0  | 1  |
| 10      | 1  | 0  | 0  | 1  |

3(b)(iii)

**One mark for each mark point**

- One correct Boolean term
- Boolean terms and operator correct and no other terms present

$$Z = \bar{B}.C + B.\bar{C}.\bar{D} // B.\bar{C}.\bar{D} + \bar{B}.C$$

5(a)

**1 mark** for all 3 appropriate sensors

| Scenario                                           | Type of sensor               |
|----------------------------------------------------|------------------------------|
| A door is open.                                    | Pressure sensor // Infra-red |
| The external daylight-level is below a set amount. | Light sensor                 |
| A person is detected within 2 metres.              | Infra-red                    |

5(b)

**1 mark** for each correct expression

$$X = E \text{ AND } A \text{ AND } C$$

$$Y = E \text{ AND } (B \text{ OR } C \text{ OR } D)$$

5(c)

**1 mark** for each bullet point (**max 3**) for a correct justification

No marks for the identification of the system

**Monitoring system**

- There is no use of feedback // The light and the alarm are just warnings
- The output of the floodlight or the audio alarm does not affect the input of data from the sensors
- The system does not have any actuators

1(a)

**1 mark** for:

Output is only 1 if one input is 1 and the other is 0 // Output is only 1 if both inputs are different // Output is only 0 if both inputs are the same

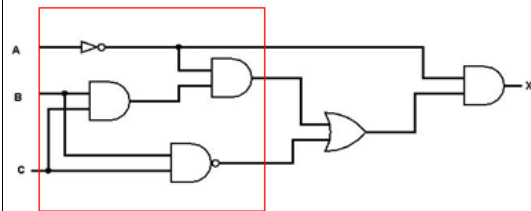
1(b)

**1 mark** each:

- ((A NOR B) AND (A OR B))
- NAND (B AND C)

$$X = ((A \text{ NOR } B) \text{ AND } (A \text{ OR } B)) \text{ NAND } (B \text{ AND } C)$$

1(c)

**1 mark** for NOT gate, 2 correct AND gates and the NAND gate**1 mark** for OR gate and the final AND gate

1(a)

**1 mark** for each correct answer:**NAND**

- The output is 0 when both inputs are 1, otherwise the output is 1

**NOR**

- The output is 1 when both inputs are 0, otherwise the output is 0

**XOR**

- The output is 1 when one of the inputs is 1 and the other input is 0, otherwise the output is 0

**OR**

- The output is 0 when both inputs are 0, otherwise the output is 1

1(b)

**1 mark** for both AND gates with correct inputs**1 mark** for correct OR and NOT gates with correct inputs and no superfluous gates: