

Course Companion

OxfordAQA • International GCSE • Physics

Every topic handout in one volume

exercises.lol

Contents

1. Forces and their effects	2
2. Energy	6
3. Waves	9
4. Particle model of matter	14
5. Electricity and magnetism	17
6. Generating and distributing electricity and household use .	20
7. Nuclear physics	24
8. Space physics	27

Forces and their effects


OxfordAQA · International GCSE · Physics

Every push, pull and hold in the world is a force – and OxfordAQA’s first topic organises them: contact and non-contact interactions, scalars against vectors, Newton’s three laws, vehicle safety, and the P-extension ideas of momentum, terminal velocity, centre of mass and moments.

OxfordAQA International GCSE Physics 9203, topic 3.1 (Version 5.1, exams 2018 onwards). Statements marked (P) are Paper-2-only; paper details are in the specification’s scheme of assessment. The specimen components on file are 9203-92031 and 9203-92032 – specimen practice in this package is always labelled as such.

Forces and their interactions

Objects interact by **non-contact field forces** (gravity, electrostatics, magnetism) and **contact forces** (friction, air resistance, tension, normal contact force). **Friction** acts between two surfaces, impedes motion and may heat them; air resistance is friction with a fluid.

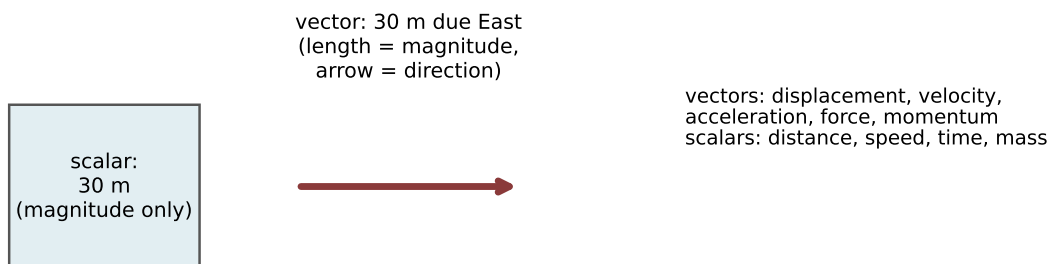

Scalars have magnitude only (distance, speed, time); **vectors** add direction (displacement, velocity, acceleration, force, momentum) and can be drawn as arrows.

Weight is the force of gravity: $W = m \times g$.

Forces can **change shape** – stretching, bending, compressing. Elastic distortions recover; inelastic ones do not (P). A stretched spring stores **elastic potential energy**, and below the **limit of proportionality**:


$$F = k \times e$$

Required practical: investigate force against extension for a spring (hang masses,

plot the line, gradient = k).

Motion and Newton's laws

Speed is the gradient of a distance–time graph; velocity adds direction: $v = s/t$ (usable for average speeds too). Acceleration is the rate of change of velocity: $a = \Delta v/t$ – from the gradient of a velocity–time graph, whose **area gives distance travelled**. Changing direction at constant speed is still acceleration.

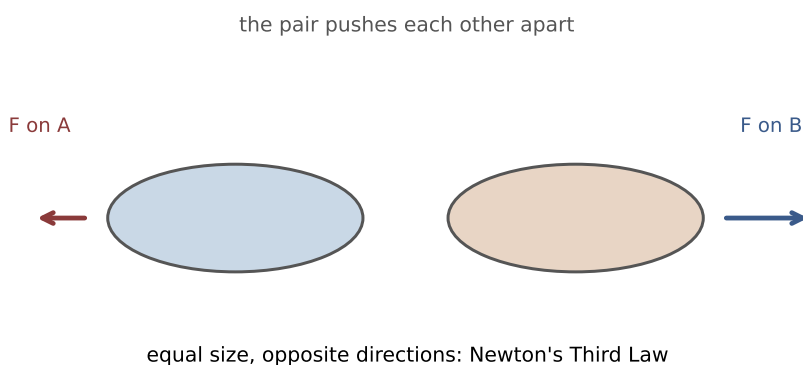

- **Newton's First Law:** zero resultant force $\rightarrow$ rest stays rest, motion keeps its velocity.
- **Newton's Second Law:** $F = m \times a$ in the direction of the resultant.
- **Newton's Third Law:** interacting objects exert equal, opposite forces on each other.

Resultants: opposite or parallel forces add along a line; two coplanar forces combine by **scale drawing** (drawn to scale, head to tail).


(P) Momentum, safety and terminal velocity

$$p = m \times v \qquad F = \frac{\Delta p}{t}$$

Momentum is conserved in a closed system – collisions and explosions share a fixed total. Car safety: airbags, seat belts, side-impact bars, crumple zones, crash mats, cushioned playground surfaces and cycle helmets all **lengthen the time** of impact, so for the same momentum change the force is smaller.

At a steady speed the driving force balances resistive forces. Stopping distance = **thinking + braking** distance; reaction time grows with tiredness, distraction, drugs and alcohol; braking force must grow with speed, and large decelerations overheat

brakes. Braking converts the vehicle's kinetic energy into heating the brakes (friction work); braking distance lengthens on wet or icy roads and with worn brakes or tyres. An object falling through a fluid accelerates until drag equals weight – **terminal velocity**; parachutes raise drag to cut the terminal velocity, and streamlining (a shark's shape, a car's design) reduces drag to raise the maximum speed.


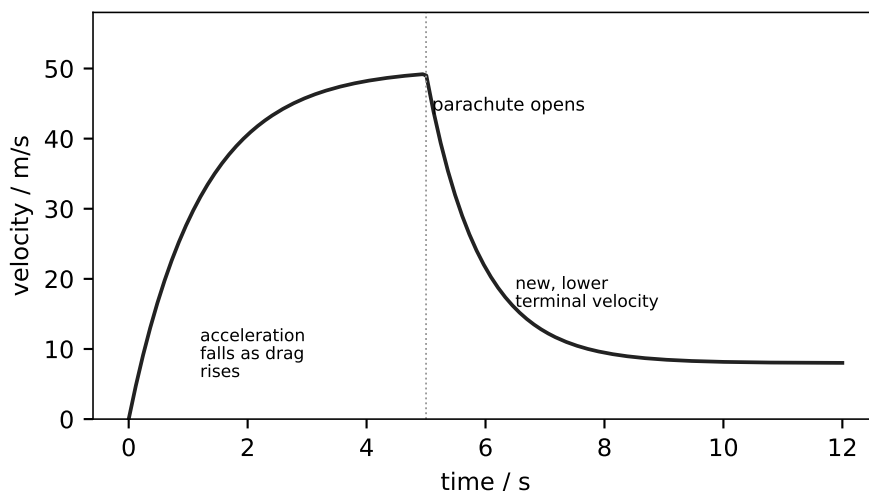


(P) Centre of mass and moments

The **centre of mass** is where an object's mass may be thought concentrated; a freely suspended object rests with it below the suspension point, and a symmetrical object's centre of mass lies on the axis of symmetry. Find it for an irregular lamina by suspending it from two points and drawing plumb lines.

$$M = F \times d$$

A balanced object has equal total clockwise and anticlockwise **moments**; levers are force multipliers. If the weight's line of action falls outside the base, the resultant moment topples the object (vehicles, balancing toys).

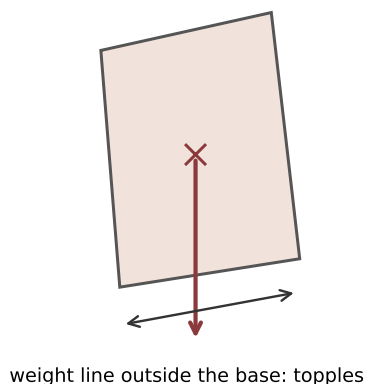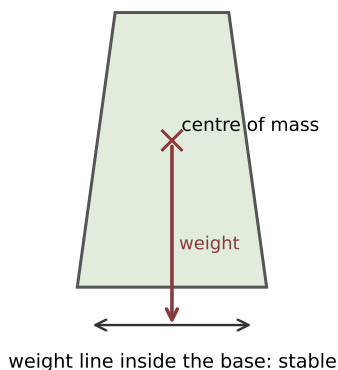

Check yourself

1. Give one example each of a contact and a non-contact force.
2. Which of these are vectors: speed, displacement, time, force?
3. State the spring equation and the name of its constant.
4. State Newton's three laws in one sentence each.
5. A 900 kg car accelerates at 2 m/s^2 . Calculate the resultant force.
6. Name two factors that lengthen thinking distance and two that lengthen braking distance.
7. (P) Explain how a crumple zone protects passengers, using $F = \Delta p/t$.
8. (P) Why does a parachutist reach a lower terminal velocity after opening the parachute?
9. (P) Where is the centre of mass of a symmetrical object?
10. (P) A 250 N force acts 0.4 m from a pivot. Calculate its moment.

Answers: 1 contact – friction/tension/air resistance/normal; non-contact – gravity/electrostatic/magnetic; 2 displacement and force; 3 $F = ke$, the spring constant (N/m); 4 first – no resultant force means no change in velocity; second – $F = ma$ in the resultant's direction; third – interactions give equal and opposite forces; 5 $F = 900 \times 2 = 1800 \text{ N}$; 6 thinking – tiredness, distractions, drugs/alcohol (any two); braking – wet or icy roads, worn brakes or tyres (any two); 7 (P) the crumple zone lengthens the collision time; for the same momentum change, $F = \Delta p/t$ is smaller, so less force reaches the passengers; 8 (P) the parachute greatly increases drag, so drag balances weight at a much lower speed; 9 (P) on its axis of symmetry; 10 (P) $M = 250 \times 0.4 = 100 \text{ N m}$.

Energy

OxfordAQA · International GCSE · Physics

Energy: the accountant of physics

Nothing destroys energy – it is only moved between stores and partly dissipated into less useful forms. OxfordAQA's second topic builds the accounting: work and power, the three energy-store equations, conservation with Sankey diagrams, and the choices behind national energy resources.

OxfordAQA International GCSE Physics 9203, topic 3.2 (Version 5.1). Statements marked (P) are Paper-2-only.

Forces and energy


$$W = F \times d \quad E_e = \frac{1}{2}ke^2 \quad E_p = mgh \quad E_k = \frac{1}{2}mv^2 \quad P = \frac{E}{t}$$

Work is done when a force moves its point of application through a distance; work against friction transfers energy by heating (shuttle re-entry, meteorites, brakes). A stretched spring stores **elastic potential energy** $\frac{1}{2}ke^2$; a raised mass stores **gravitational potential energy** mgh ; a moving mass carries **kinetic energy** $\frac{1}{2}mv^2$ – doubling mass doubles it, doubling speed **quadruples** it (the road-safety link). **Power** is the rate of energy transfer.

Worked check. A 1500 kg car at 20 m/s brakes to rest: KE removed = $\frac{1}{2} \times 1500 \times 400 = 300\,000$ J – all transferred to heating the brakes. Lifting it 2 m at $g = 10$ N/kg stores $1500 \times 10 \times 2 = 30\,000$ J.


Energy transfers and dissipation

energy STORES (left) are moved by TRANSFER PATHWAYS (right)

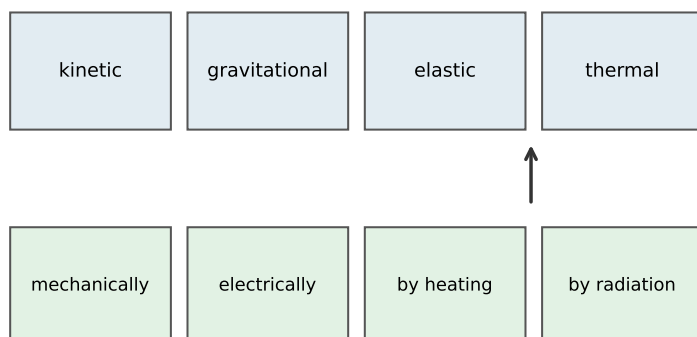

a system change moves energy between stores along the pathways

When a system changes, energy is transferred – usefully, stored, or **dissipated** (“wasted”) into less useful stores; it is never created or destroyed. Friction and air resistance dissipate energy by heating. (P) A **pendulum** swaps kinetic and gravitational potential energy each swing.

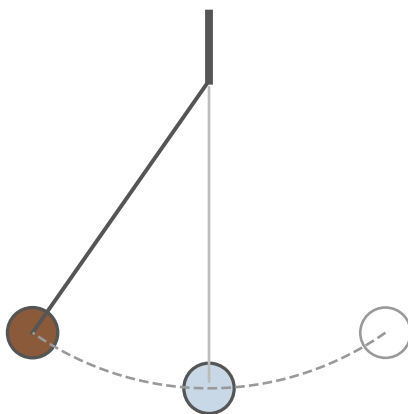

highest points: all GPE

lowest point: all KE

$$\text{efficiency} = \frac{\text{useful energy out}}{\text{total energy in}} \times 100\% \left(= \frac{\text{useful power out}}{\text{total power in}} \right)$$

Sankey diagrams show the redistribution: arrows split in proportion to the energy flows (draw them to scale – width $\propto$ energy).

Worked check. A 60 W lamp gives 6 W of light: **efficiency** $= 6/60 \times 100 = 10\%$.

Energy resources

Fuels are chosen for ease of storage, energy content and safety; some transfer more of their energy usefully than others. National generation trades **renewability** against cost, reliability and the environmental cost of extraction, use and disposal.

solar	+ renewable; no fuel cost	- night and cloud dependent
wind	+ renewable; no emissions	- unreliable; visual impact
geothermal	+ steady output	- few suitable sites
wave/tidal	+ predictable tides	- harsh marine environment

Check yourself

1. Calculate the work done by a 50 N force moving 4 m.
2. Calculate the elastic energy in a spring ($k = 200 \text{ N/m}$) stretched 0.15 m.
3. A 2 kg book is lifted 3 m at $g = 10 \text{ N/kg}$. Calculate the GPE gained.
4. What happens to the kinetic energy of a car when it brakes?
5. A motor transfers 800 J in 20 s. Calculate its power.
6. State the efficiency equation in energy and power forms.
7. A lamp gives out 12 J of light for every 100 J in. Calculate the efficiency.
8. What does a Sankey diagram's arrow width show?
9. Give one advantage and one drawback of wind power.
10. What does "dissipated" mean?

Answers: 1 $W = 50 \times 4 = 200 \text{ J}$; 2 $E_e = \frac{1}{2} \times 200 \times 0.0225 = 2.25 \text{ J}$; 3 $E_p = 2 \times 10 \times 3 = 60 \text{ J}$; 4 it is transferred to thermal energy of the brakes and surroundings by the friction force (the brakes heat up); 5 $P = 800/20 = 40 \text{ W}$; 6 useful energy out $\div$ total energy in ($\times 100 \%$); equally useful power out $\div$ total power in; 7 $12/100 \times 100 = 12\%$; 8 the energy flowing in that direction – width is proportional to energy; 9 renewable with no fuel or emissions; unreliable output with visual impact; 10 transferred to less useful stores (often waste heat), so it cannot readily do what we want.

Waves

OxfordAQA · International GCSE · Physics


Waves: carrying energy and information

Waves move energy from a source to a receiver without moving matter – light to an eye, sound to an ear, radio to a phone. This topic builds the wave model (frequency, wavelength, speed), then applies it across the electromagnetic spectrum, to sound and (P) ultrasound, reflection, refraction with total internal reflection, and (P) lenses and the eye.


OxfordAQA International GCSE Physics 9203, topic 3.3 (Version 5.1). Statements marked (P) are Paper-2-only.

General properties of waves


transverse: oscillations perpendicular to travel (EM, water)

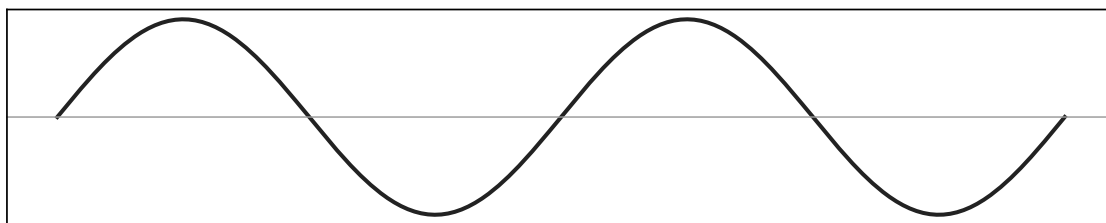

longitudinal: compressions and rarefactions along the travel (sound)

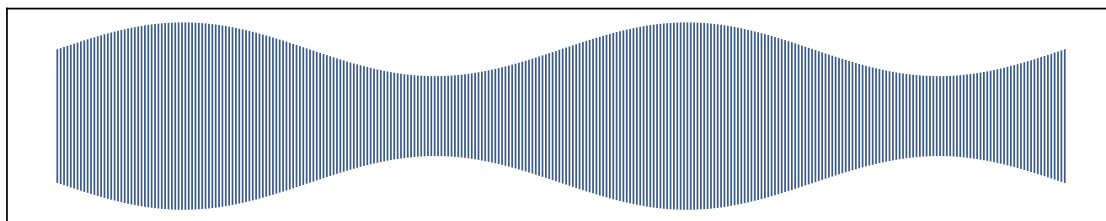

Transverse : oscillations perpendicular to travel – electromagnetic and water waves. **Longitudinal** : oscillations parallel, as compressions and rarefactions – sound; mechanical waves may be either. At a boundary, waves are **reflected**, **transmitted or absorbed**; refraction comes from a **change of velocity** between media, and **diffraction** spreads waves through a gap – strongly when the gap is comparable to the wavelength.

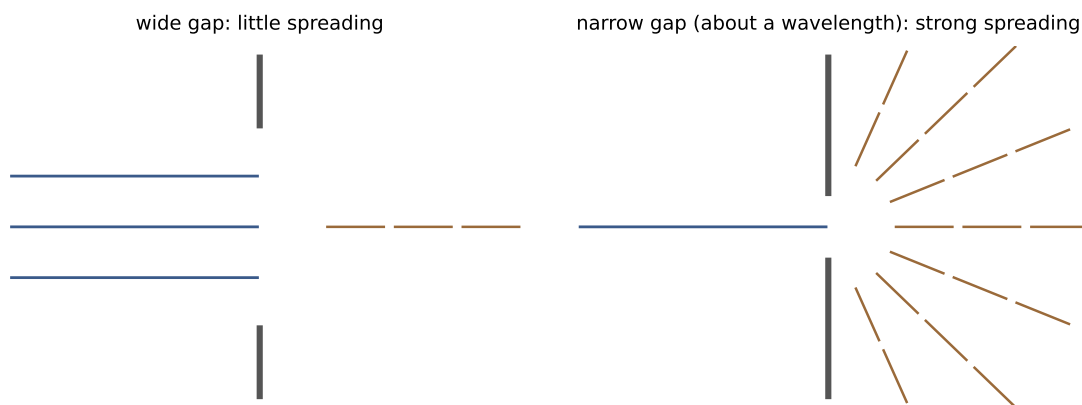

Amplitude, wavelength, frequency, period and wavefront define any wave, and:

$$v = f \times \lambda$$

Worked check. A water wave of frequency 2 Hz and wavelength 1.5 m travels at $2 \times 1.5 = 3$ m/s.

The electromagnetic spectrum

One continuous family, all transverse, all at the same speed in vacuum, ordered from radio (10^4 m and beyond) down to gamma (10^{-15} m). Visible light is the narrow band our eyes detect – different wavelengths are different colours. Every object emits and absorbs **infrared**; (P) hotter objects radiate more and at higher frequencies (**black-body radiation**), dark matt surfaces absorb and emit best, light shiny ones reflect.

Uses: radio – TV and radio including Bluetooth; microwaves – phones, satellite TV; infrared – remotes, night vision, heating; visible – photography, fibre optics; UV – security marking; X-rays – medical imaging; gamma – sterilising instruments and food. Hazards: microwaves heat tissue; infrared burns; UV causes skin cancer and blindness; X-rays kill cells in high doses; gamma causes mutations – limit exposure time and distance, and shield.

X-rays: very short wavelength, high energy, ionising; they affect photographic film, are absorbed by metal and bone, and are transmitted by soft tissue – the basis of CT, fracture and dental imaging, and of cancer treatment (with careful monitoring of workers' doses).

Sound and ultrasound

Sound is longitudinal, vibrating a medium, heard between **20 Hz and 20 000 Hz**; pitch follows frequency, loudness follows amplitude. Sound reflects (echoes) and diffracts. (P) **Ultrasound** lies above 20 kHz: at a boundary between media it partially reflects, and the echo time locates the boundary:

$$s = v \times t$$

Worked check. An ultrasound pulse returns from a fetus boundary after 6.0×10^{-5} s (speed 1500 m/s in tissue): boundary depth = $1500 \times 6.0 \times 10^{-5} / 2 = 4.5$ cm – divide by two for the round trip. Uses: prenatal scanning, breaking kidney stones.

Reflection and refraction


Law of reflection: **angle of incidence = angle of reflection**, measured from the **normal**. A plane mirror gives a **virtual, upright, laterally inverted** image; construct ray diagrams with the normal drawn in. (P) Light entering a **denser** medium slows and bends **towards the normal**; into a less dense one, **away**; a prism **disperses** white light into a spectrum. Refractive index compares speeds:

$$n = \frac{\text{speed of light in vacuum}}{\text{speed in the medium}} = \frac{\sin i}{\sin r} \quad \sin c = \frac{1}{n}$$

Beyond the **critical angle** in the denser medium, light is totally internally reflected – how **optical fibres** carry visible light and infrared for medicine (endoscopes) and communications. Required practical: refraction of light by different substances.

Lenses and the eye (P)

A **convex** (converging) lens brings parallel rays to the **principal focus** (focal length from the lens); a **concave** (diverging) lens spreads them as if from the focus. Images are described as larger/smaller, upright/inverted, real/virtual – ray diagrams on graph paper show them, and **magnification = image height $\div$ object height**. A converging lens held close acts as a magnifying glass (virtual, upright, enlarged).

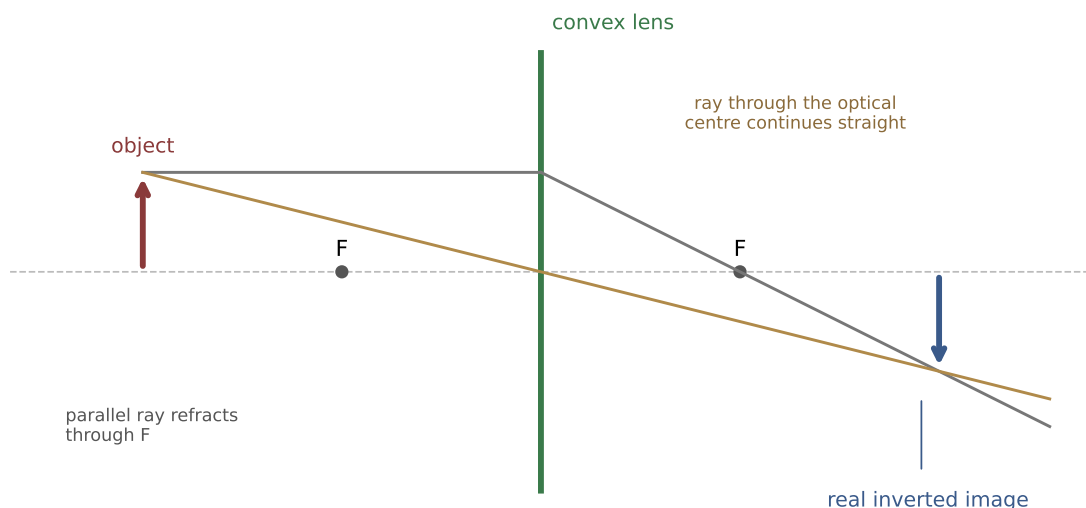

The eye: **retina** (detector), **cornea** (main refraction), **variable-focus lens**, **pupil/iris** (aperture), **ciliary muscle** and **suspensory ligaments** (change lens shape). Near point ≈ 25 cm; far point at infinity. **Long sight** (eyeball too short) is corrected with a **convex** lens; **short sight** (too long) with a **concave** lens; lasers can reshape the cornea in surgery. Against a camera: the eye focuses by changing lens shape, the camera by changing the lens–film distance; the retina plays the CCD’s role.

Check yourself

1. Give the oscillation directions of transverse and longitudinal waves, with one example of each.
2. State $v = f\lambda$ and calculate the speed of a 500 Hz wave of wavelength 0.68 m.
3. When is diffraction strongest through a gap?
4. Order the EM spectrum by increasing frequency.
5. Which surfaces best absorb infrared?
6. State the frequency range of human hearing.
7. (P) An ultrasound echo returns in 0.0001 s from 15 cm deep. What is the speed?
8. State the law of reflection and the nature of a plane-mirror image.
9. (P) Glass has $n = 1.5$. Calculate the critical angle.
10. (P) Which lens corrects short sight, and why?

Answers: 1 perpendicular – light; parallel, compressions – sound; 2 $v = 500 \times 0.68 = 340$ m/s; 3 gap $\approx$ one wavelength; 4 radio $\rightarrow$ microwave $\rightarrow$ IR $\rightarrow$ visible $\rightarrow$ UV $\rightarrow$ X-ray $\rightarrow$ gamma; 5 dark, matt; 6 20 Hz–20 kHz; 7 (P) $v = 0.3/10^{-4} = 3000$ m/s (round trip).

Answers continued: 8 $i = r$; virtual, upright, laterally inverted; 9 (P) $\sin c = 1/1.5$, $c \approx 41.8^\circ$; 10 (P) a concave lens – it spreads light so the too-long eye focuses it on the retina.

Particle model of matter


OxfordAQA · International GCSE · Physics

The particle model of matter

Everything is particles. Their energy, separation and motion explain the states of matter, heating and cooling, and why bridges need gaps. OxfordAQA's fourth topic builds the model and quantifies it: specific heat capacity, the (P) latent heats, evaporation, energy-transfer design and thermal expansion.

OxfordAQA International GCSE Physics 9203, topic 3.4 (Version 5.1). Statements marked (P) are Paper-2-only.

Kinetic theory

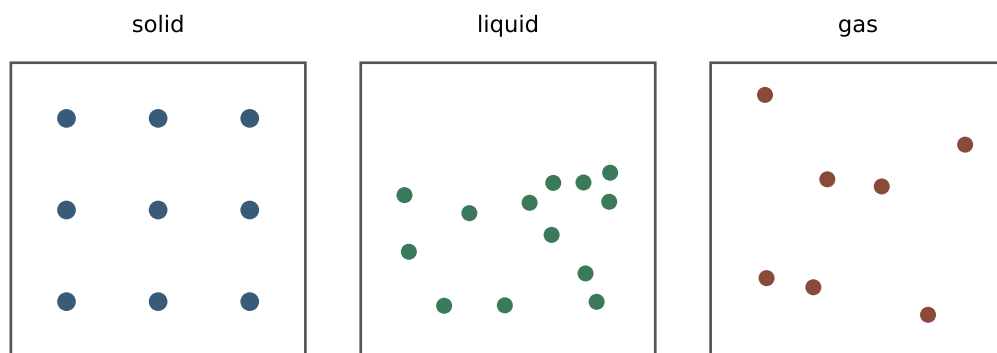

Specific heat capacity


c is the energy to raise 1 kg of a substance by 1 °C:

$$E = m \times c \times \Delta\theta$$

Worked check. Heating 1.5 kg of water ($c = 4200$) by 40 °C: $E = 1.5 \times 4200 \times 40 = 252\,000$ J.

(P) Changing **state** needs energy with **no temperature change: latent heat of vaporisation** $E = m \times L_V$ (liquid $\rightarrow$ vapour) and **latent heat of fusion**

$E = m \times L_F$ (solid $\rightarrow$ liquid). Impurities change melting and boiling points. Required practical (P): a cooling curve for stearic acid.

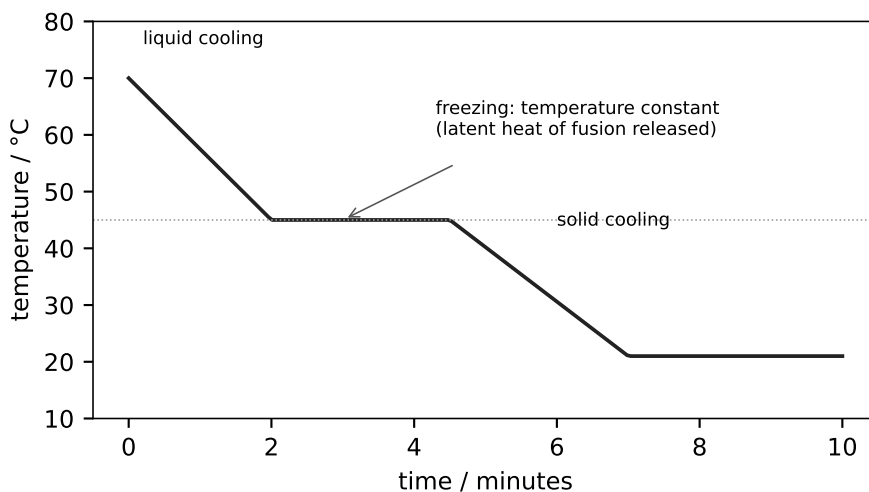


Energy transfers and particle motion

Conduction passes energy along a solid by particle vibration, helped by **free electrons** in metals; insulators lack both. **Convection** circulates fluid: particles gain energy, move apart, the fluid becomes **less dense and rises**, cooler fluid sinks. **Evaporation** turns fast surface molecules to vapour, cooling what remains – faster with higher temperature, larger surface area, draughts and lower humidity; **condensation** reverses it.

faster evaporation with:

- higher temperature
- larger surface area
- air movement (draught)
- lower humidity

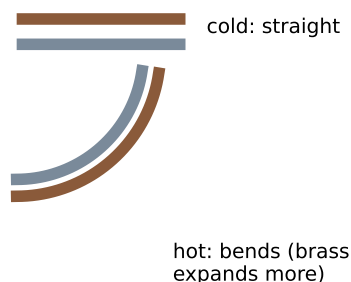

The rate of energy transfer by heating grows with surface area and volume, the material, the surface in contact, and the **temperature difference**. Design follows: cooling fins maximise area; animals' relative ear size matches climate. Most substances **expand** when heated – a hazard for roofs and bridges (gaps and rollers), useful in the **bimetallic-strip thermostat** that bends as one metal expands more and breaks a circuit.

Check yourself

1. Describe the particle arrangement in a liquid.
2. Define specific heat capacity.
3. Calculate the energy to heat 2 kg of aluminium ($c = 900$) by $30\text{ }^{\circ}\text{C}$.
4. (P) Why does the temperature stay constant while a substance freezes?
5. (P) 0.5 kg of a substance has $L_F = 330\,000\text{ J/kg}$. Calculate the energy to melt it.
6. Explain conduction in metals, naming the extra carriers.
7. Explain why warm water rises.
8. Give three factors that speed evaporation.
9. Give one hazard and one use of thermal expansion.
10. Why do cooling fins have large surface area?

Answers: 1 particles touch but arranged randomly, moving past each other; 2 the energy needed to change the temperature of 1 kg of the substance by $1\text{ }^{\circ}\text{C}$; 3 $E = 2 \times 900 \times 30 = 54\,000\text{ J}$; 4 (P) the energy released as bonds form (latent heat of fusion) leaves at the same rate energy is removed, so the particles' kinetic energy is unchanged; 5 (P) $E = 0.5 \times 330\,000 = 165\,000\text{ J}$; 6 vibrating particles pass energy to neighbours, and free electrons carry energy quickly through the metal; 7 the warmer particles move apart, making that water less dense than its surroundings, so it rises; 8 higher temperature, larger surface area, air movement over the surface (also lower humidity); 9 hazard – expansion of bridges/roofs needs gaps; use – the bending bimetallic strip in a thermostat; 10 larger area transfers energy to the surroundings faster by heating.

Electricity and magnetism

OxfordAQA · International GCSE · Physics

Electricity is charge on the move, guided by potential difference, resisted by every component – and every current makes a magnetic field. OxfordAQA's largest topic builds the circuit toolkit, the component behaviours, and the electromagnets that follow.

OxfordAQA International GCSE Physics 9203, topic 3.5 (Version 5.1). Statements marked (P) are Paper-2-only.


Electrical circuits

Metals conduct because they have **free electrons**; (P) an isolated charge imbalance is **static electricity**, discharged when a conducting route appears (lightning). Current is the rate of flow of charge:

$$I = \frac{Q}{t} \quad V = \frac{E}{Q} \quad V = I \times R$$


Voltage drives charge round a circuit; **potential difference** across a component measures the energy transferred per unit charge (volts = joules per coulomb). Learn the standard symbols – switch, lamp, fuse, cell, battery, diode, resistor, variable resistor, thermistor, LDR, LED, ammeter and voltmeter.

series: one loop

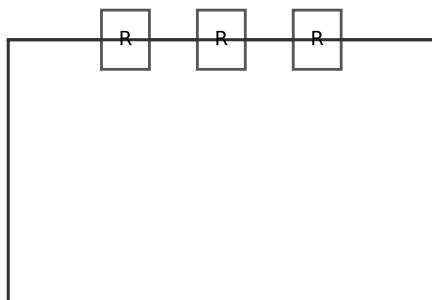


same current; p.d.s add; $R = R_1 + R_2$

parallel: branches

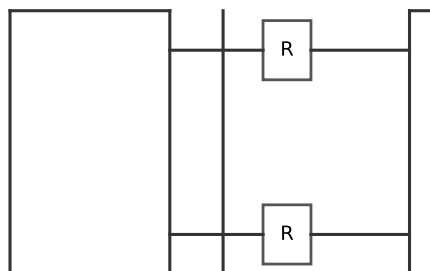

same p.d.; currents add; R less than either

At constant temperature a resistor's V–I graph is a straight line (ohmic); a **filament lamp** curves as its ions vibrate more with temperature; a **diode** conducts forward only; (P) a **thermistor's** resistance falls as temperature rises (thermostats); an **LDR's** falls as light rises (automatic lighting); an **LED** emits light forward and saves energy versus filament and CFL lamps.

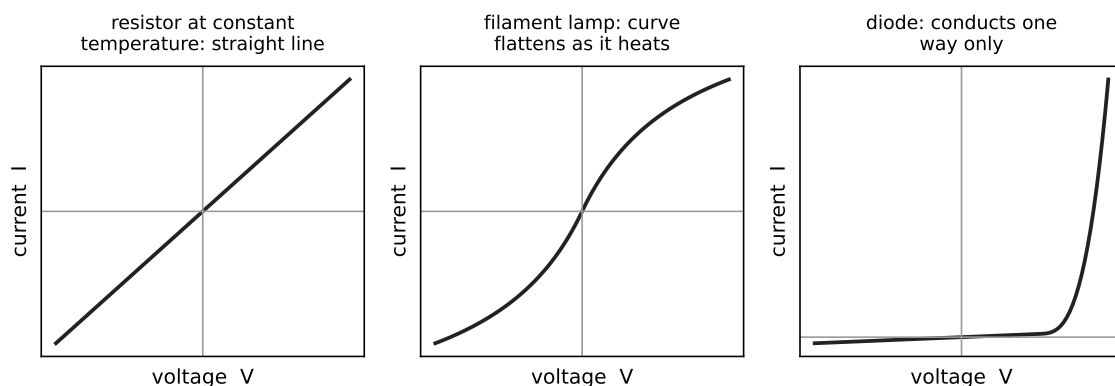


Series: same current, p.d.s shared, resistances add. **Parallel:** same p.d., currents split, combined resistance less than either. Charge colliding with the lattice heats every resistor.

Worked check. A 230 V lamp draws 0.25 A: $R = 230/0.25 = 920 \, \Omega$. Two $4 \, \Omega$ resistors in series across 12 V carry $I = 12/8 = 1.5 \, \text{A}$; in parallel, $R = 2 \, \Omega$ and the supply gives $I = 12/2 = 6 \, \text{A}$.

Magnetism and electromagnetism

Poles: like repel, unlike attract – non-contact forces. Field lines run N to S outside a magnet; opposite poles facing give a **uniform** field between them. An **induced magnet** attracts while in the field and loses magnetism on removal; the Earth's field lets a plotting compass navigate.

A current-carrying wire has circular field lines around it (stronger current $\rightarrow$ stronger field; reverse current $\rightarrow$ reverse direction). A **solenoid** concentrates the field; with a soft-iron core it is an **electromagnet** – switchable, adjustable, used in scrapyard cranes, relays and door locks. Required practical: the factors determining an electromagnet's strength.



field runs S to N inside the core (arrows right);
outside it loops back to the S end

Check yourself

1. Why do metals conduct?
2. State the relationship between current, charge and time with units.
3. Calculate the charge flowing when 2 A passes for 30 s.
4. State the V-I shape for a resistor at constant temperature and for a filament lamp.
5. (P) What happens to a thermistor's resistance as temperature rises?
6. State the current and p.d. rules for series and for parallel connections.
7. Calculate R for a 12 V supply pushing 0.5 A.
8. State the pole rule and the direction of field lines outside a magnet.
9. What is an induced magnet?
10. Name two ways to strengthen an electromagnet.

Answers: 1 they contain free electrons that drift when a p.d. is applied; 2 $Q = It$, charge in coulombs = current in amperes $\times$ time in seconds; 3 $Q = 2 \times 30 = 60 \text{ C}$; 4 straight line through the origin; S-curve flattening as current (and so temperature) rises; 5 (P) it falls – used in thermostats; 6 series – same current everywhere, p.d.s add; parallel – same p.d. across branches, currents add; 7 $R = 12/0.5 = 24 \text{ } \Omega$; 8 like poles repel, unlike attract; N to S outside the magnet; 9 a magnetic material that becomes a magnet only while placed in a field – attraction only, losing most magnetism on removal; 10 more turns on the coil; larger current (also a soft-iron core).

Generating and distributing electricity and household use

OxfordAQA · International GCSE · Physics


Generating and distributing electricity

Move a magnet, move a current – a p.d. appears. OxfordAQA's sixth topic runs the full chain from the generator effect through the national grid's transformers to the appliances and safety systems of the home. All statements in this topic are Paper-2 (P).

OxfordAQA International GCSE Physics 9203, topic 3.6 (Version 5.1) – entirely (P) content.


Generating electricity (P)

The **generator effect** induces a p.d. across a conductor that moves through a magnetic field, or sits in a changing field. Reverse the motion or the polarity and the induced p.d. reverses; the induced current's own field **opposes** the change. The p.d. grows with faster movement, stronger field, more turns and larger coil area. An **alternator** spins a coil in a field to make a.c.; a **dynamo** gives d.c. – know the p.d.–time graphs. Power stations spin turbines to turn coils between magnets.

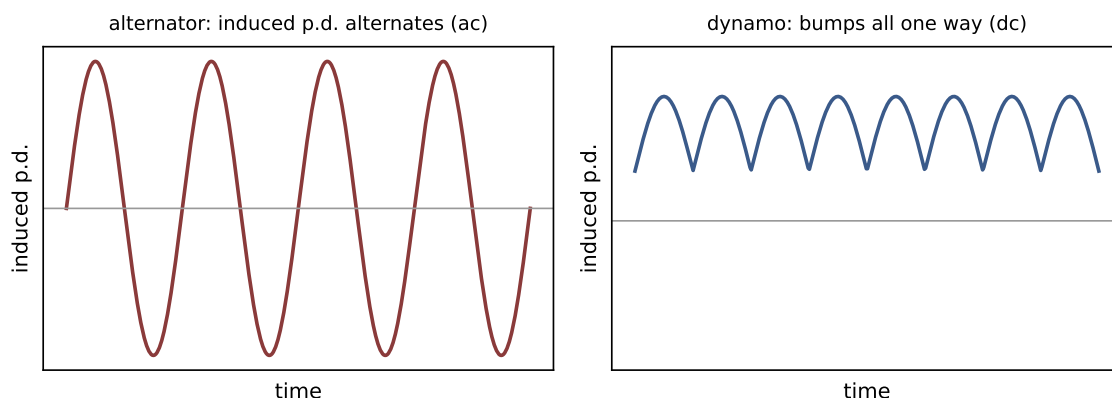

Transmission, transformers and the home (P)

From the station to the socket, every watt travels the same chain of coils and cables.

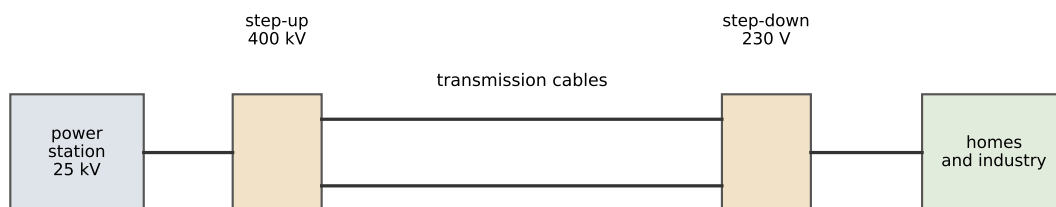

high voltage keeps the current small, so cable heating (I^2R) losses stay low

For a given power, high transmission voltage means **low current** and so little cable heating. A **transformer** is two coils on a soft-iron core: alternating current in the primary makes a changing field that induces a p.d. in the secondary.

$$\frac{V_p}{V_s} = \frac{n_p}{n_s} \quad V_p I_p = V_s I_s \text{ (100\%)}$$


Step-up before the lines, step-down after; **switch-mode transformers** (50–200 kHz) are small and light – phone chargers.

Worked check. A transformer steps 25 kV up to 400 kV with 1000 primary turns: $n_s = 1000 \times 400/25 = 16\,000$ turns. At 100 MW the line current is $I = P/V = 10^8/(4 \times 10^5) = 250$ A.

Cells give d.c.; mains is a.c. with fixed frequency and voltage – read period and frequency from oscilloscope-style traces. Safety: **earthing** drains fault current from metal casings; a **fuse** melts or a **circuit breaker** trips on excess current – the breaker is faster and resettable; double-insulated appliances need no earth.

The motor effect (P)

A current-carrying wire across a magnetic field feels a force (zero if parallel to it). Force grows with stronger field, bigger current and more wire in the field; reverse either to reverse the force – **Fleming's left-hand rule** predicts the direction.

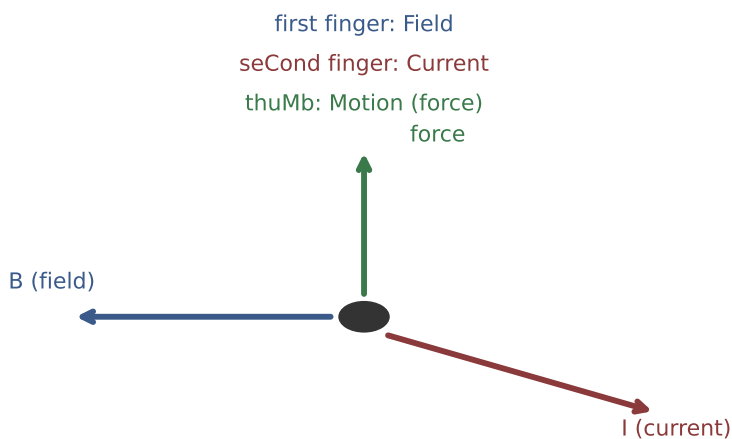

the three are mutually at right angles

A current-carrying **coil** in a field rotates – the electric motor.

Transferring electrical energy (P)

$$P = \frac{E}{t} \quad P = I \times V \quad E = V \times Q \quad E (\text{kWh}) = P (\text{kW}) \times t (\text{h})$$

Appliance labels give power; compute the current to choose a fuse, and the energy in **kilowatt-hours** for billing ($E = Pt$; cost = kWh $\times$ price per unit, read from meter readings).

Worked check. A 2.0 kW heater for 3 h uses 6.0 kWh; at 0.9 per kWh that costs 5.4. A 230 V, 1.1 kW kettle draws $I = 1100/230 \approx 4.8$ A – fit a 5 A or 13 A fuse (next rating above).

Check yourself

1. State two ways to induce a p.d. in a conductor.
2. Give three factors that increase the size of an induced p.d.
3. Sketch the p.d.–time graphs of an alternator and a dynamo.
4. Why does the grid transmit at high voltage?
5. A transformer has 200 primary and 3000 secondary turns on 12 V a.c. Calculate the secondary p.d.
6. State the turns-ratio and power equations for a 100 % efficient transformer.
7. Explain how earthing and a fuse protect a user together.
8. State Fleming's left-hand rule.
9. Calculate the current of a 230 V, 2.3 kW heater, and a sensible fuse.

10. Calculate the energy in kWh used by a 1.5 kW kettle in 20 minutes.

Answers: 1 move the conductor through a field; place it in a changing magnetic field; 2 faster motion; stronger field; more turns (also larger coil area); 3 alternator – a sine wave about zero; dynamo – humps all above (or all below) the axis; 4 for the same power the current is smaller, so I^2R heating losses in the cables are far lower; 5 $V_s = 12 \times 3000/200 = 180$ V; 6 $V_p/V_s = n_p/n_s$ and $V_p I_p = V_s I_s$; 7 the earth wire gives the fault current a path to earth, and the surge blows the fuse, disconnecting the live wire; 8 first finger Field, second finger Current, thumb Motion – mutually at right angles; 9 $I = 2300/230 = 10$ A – use a 13 A fuse; 10 $t = 1/3$ h, so $E = 1.5 \times 1/3 = 0.5$ kWh.

Nuclear physics


OxfordAQA · International GCSE · Physics

The nucleus is a millionth of the atom yet holds nearly all its mass – and unstable nuclei pour out energy as radiation, fission fragments, or the fusion that lights the stars. OxfordAQA's seventh topic covers the nuclear model, the three radiations, half-life, contamination versus irradiation, reactors and (P) fusion.

OxfordAQA International GCSE Physics 9203, topic 3.7 (Version 5.1). Statements marked (P) are Paper-2-only.

Atomic structure

An atom is about 10^{-10} m across: a tiny positive nucleus (protons and neutrons, nearly all the mass) with electrons around it – Rutherford's **alpha-scattering** evidence for the concentrated nucleus. Proton mass 1 charge +1; neutron mass 1 charge 0; electron charge -1 , negligible mass. A neutral atom has equal protons and electrons; atoms lose or gain electrons to become **ions**.

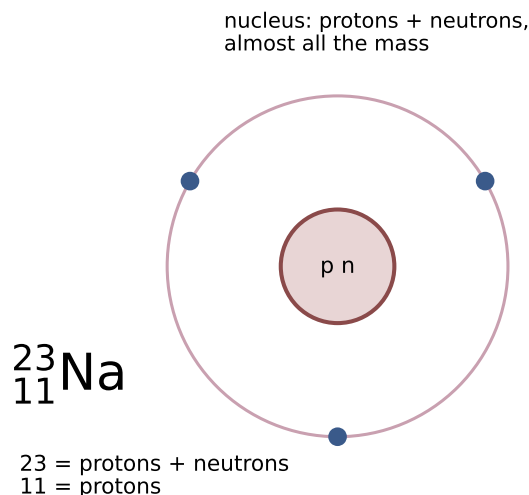


^A_ZX : A = mass number (protons + neutrons), Z = proton number; isotopes share Z and differ in neutrons.

Ionising radiation from the nucleus

Unstable nuclei decay **randomly**, unaffected by chemistry or physics, emitting:


Radiation	Nature	Ionising	Range in air
alpha	2p + 2n (helium nucleus)	strongest	a few cm
beta-minus	fast electron (neutron $\rightarrow$ proton)	medium	tens of cm
gamma	electromagnetic wave	weakest	metres

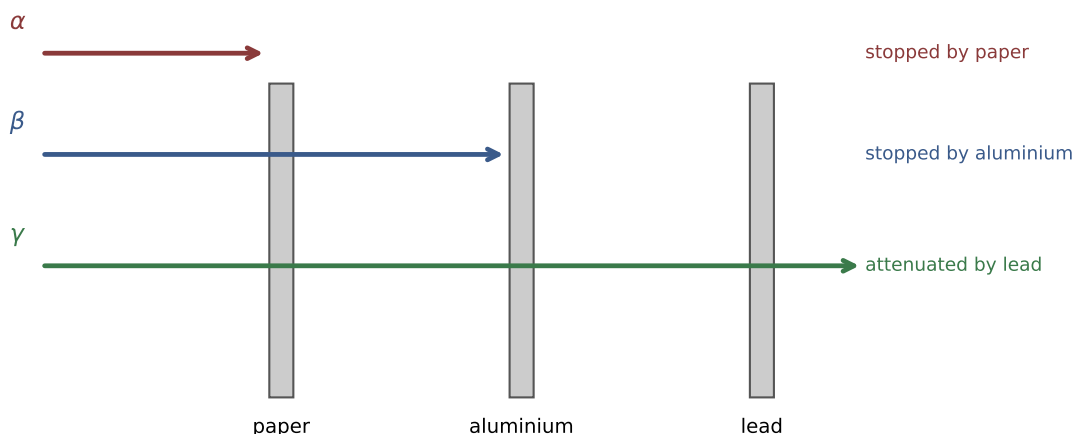

Nuclear equations conserve mass number and charge: ${}_{92}^{238}\text{U} \rightarrow {}_{90}^{234}\text{Th} + {}_2^4\text{He}$ (alpha); ${}_{6}^{14}\text{C} \rightarrow {}_{7}^{14}\text{N} + {}_{-1}^0\text{e}$ (beta). **Background radiation** comes from rocks, space, food and medical devices. (P) The **half-life** is the time for half the nuclei (or half the count rate) to decay – most unstable nuclei have short half-lives; the least unstable last millennia. **Contamination** (radioactive atoms on you) is a lasting hazard; **irradiation** exposes without making you radioactive. Dangers: mutations, cell and tissue damage.

Nuclear fission and (P) fusion

Fission splits a large unstable nucleus: **U-235** or **Pu-239** absorbs a neutron, splits into two smaller nuclei with 2–3 neutrons and far more energy than any chemical reaction. Neutrons striking further nuclei give a **chain reaction**; in a reactor **control rods** absorb neutrons to hold one fission per neutron.

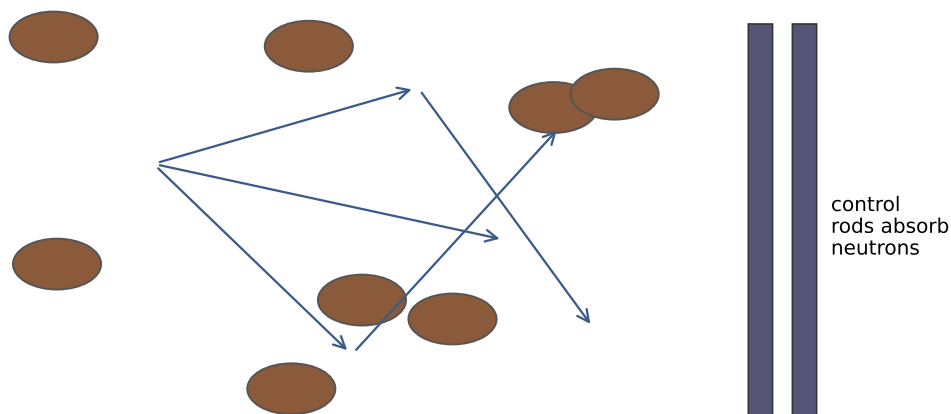

one fission: $\text{U-235} + \text{n} \rightarrow 2 \text{ nuclei} + 2\text{-3 n} + \text{energy}$

Radioactive waste stays dangerous for times set by its half-life – a managed-disposal cost of nuclear power. (P) **Fusion** joins two light nuclei into a heavier one, converting mass to energy: it powers the stars, but positive nuclei repel, so it needs **extreme temperature and pressure**.

Check yourself

1. Give the relative masses and charges of the proton, neutron and electron.
2. In ${}^{19}_9\text{F}$, how many protons and neutrons?
3. What did alpha scattering reveal about the atom?
4. Name the three radiations and their natures.
5. Which radiation is stopped by paper, and which penetrates aluminium?
6. Balance the alpha decay of ${}^{226}_{88}\text{Ra}$.
7. (P) Define half-life.
8. (P) Explain the difference between contamination and irradiation.
9. What do control rods do in a reactor?
10. (P) Why does fusion need extreme temperatures?

Answers: 1 proton 1/+1; neutron 1/0; electron negligible/−1; 2 9 protons, 10 neutrons; 3 mass and positive charge concentrate in a tiny nucleus – most alphas pass, a few bounce; 4 alpha – helium nucleus; beta – fast electron; gamma – EM wave; 5 alpha; gamma (needs thick lead); 6 ${}^{226}_{88}\text{Ra} \rightarrow {}^{222}_{86}\text{Rn} + {}^4_2\text{He}$; 7 (P) the time for half the nuclei (or the count rate) to halve; 8 (P) contamination – radioactive material on you, a hazard until removed; irradiation – exposure to radiation, ending when the source leaves; 9 absorb neutrons, holding the chain to one fission per neutron – steady; 10 (P) positive nuclei repel; they must collide at enormous speed to fuse.

Space physics


OxfordAQA · International GCSE · Physics

Gravity gathers dust into stars, stars fuse the elements, and the red-shift of distant galaxies tells us the whole universe is expanding from a beginning 14 thousand million years ago. OxfordAQA's final topic closes the course with stellar life cycles, orbits and the Big Bang evidence.


OxfordAQA International GCSE Physics 9203, topic 3.8 (Version 5.1). Statements marked (P) are Paper-2-only.

Life cycle of a star

star like the Sun

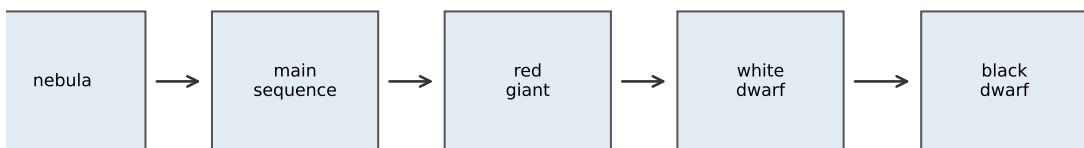

star much bigger than the Sun

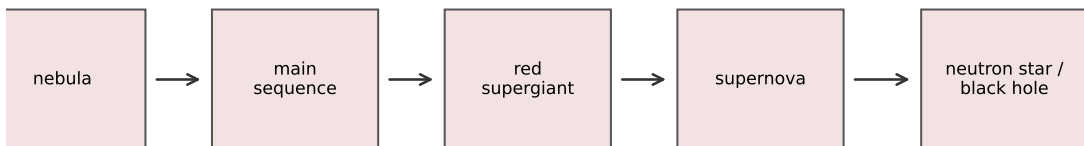


Stars form when **gravity** pulls dust and gas (mainly hydrogen and helium) together – smaller lumps become planets. In the long **main sequence**, hydrogen fuses to helium in the core and gravity balances the outward forces. The more massive a star, the hotter its core and the heavier the nuclei it can build by fusion.

When hydrogen runs out, mass decides the ending. A **Sun-like star** swells to a **red giant**, sheds its layers, and the exposed core cools from **white dwarf** to **black dwarf**. A **massive star** swells to a **red supergiant**, fuses ever-heavier elements (carbon, nitrogen, oxygen), then blasts apart as a **supernova** – scattering the elements (those heavier than iron are made in the explosion itself) – leaving a **neutron star** or **black hole**. Fusion in stars and supernovae made every naturally occurring element: the early universe held only hydrogen.


Solar system and orbital motion

The solar system: eight planets orbiting the Sun, plus moons, asteroids, dwarf planets and comets. The Milky Way is one of thousands of millions of galaxies, each with thousands of millions of stars. Artificial satellites orbit Earth in **geostationary** or **low polar** orbits.

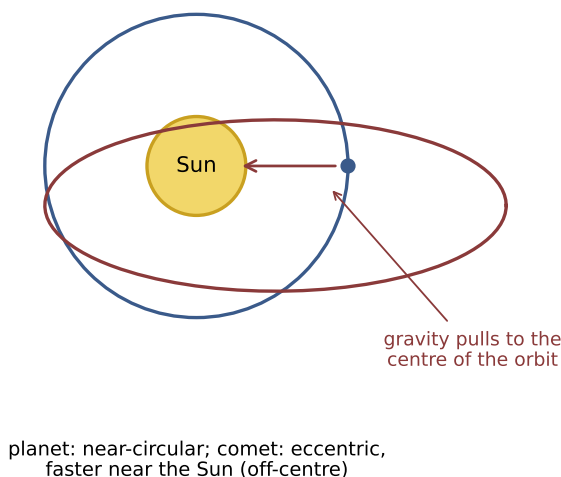

Gravity supplies the **centripetal force**: it acts towards the centre, changing the direction of motion (velocity) without changing speed. Greater separation means weaker gravity, so **lower orbital speed**: to stay at a particular radius, a satellite must move at the matching speed – change the speed and the orbit changes radius.

Red shift and the expanding universe (P)

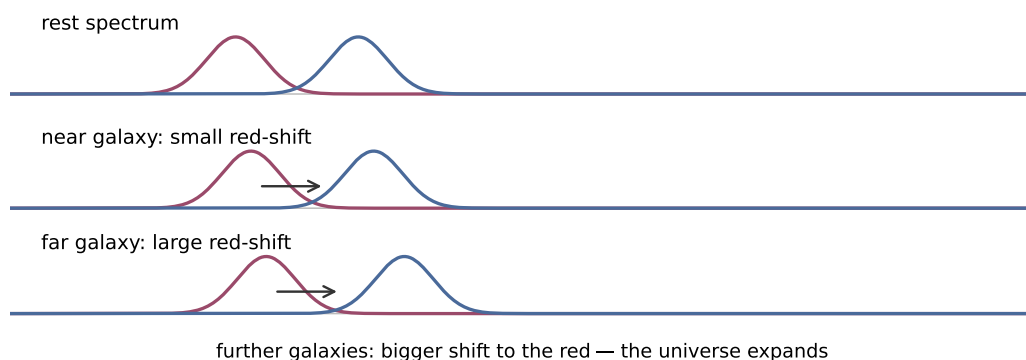

A moving wave source changes the observed wavelength (the **Doppler effect**): receding sources stretch waves – longer wavelength, lower frequency. The further a galaxy, the faster it recedes and the bigger the **red-shift** – space itself is expanding, pointing back to a very small beginning: the **Big Bang**. The **cosmic microwave background** – radiation filling the universe from shortly after that beginning – is the second pillar; the Big Bang theory is currently the only theory that explains it.

Check yourself

1. What pulls dust and gas into stars?
2. What happens in a main-sequence star's core?
3. List the three stages a Sun-like star passes through after its main sequence.
4. Which stars become supernovae?
5. Where are elements heavier than iron made?
6. Name the two artificial-satellite orbit types.
7. Why does a satellite in a higher orbit move more slowly?
8. (P) What happens to a wave's wavelength when its source recedes?
9. (P) State the two pieces of evidence for the Big Bang.
10. (P) What is the CMBR?

Answers: 1 gravitational attraction; 2 hydrogen nuclei fuse to helium, releasing energy, with gravity balanced; 3 red giant, white dwarf, black dwarf (three stages after the main sequence); 4 stars much more massive than the Sun; 5 in supernova explosions; 6 geostationary and low polar; 7 gravity weakens with separation, so the centripetal force – and the speed it demands – is smaller; 8 (P) it increases (red-shift), and the observed frequency falls; 9 (P) galaxy red-shift increasing with distance, and the cosmic microwave background; 10 (P) electromagnetic radiation filling the universe, left over from shortly after the Big Bang.