

8 (a) State what is meant by a photon.

.....

.....

..... [2]

(b) Fig. 8.1 shows a tube in which X-rays are produced at a metal target.

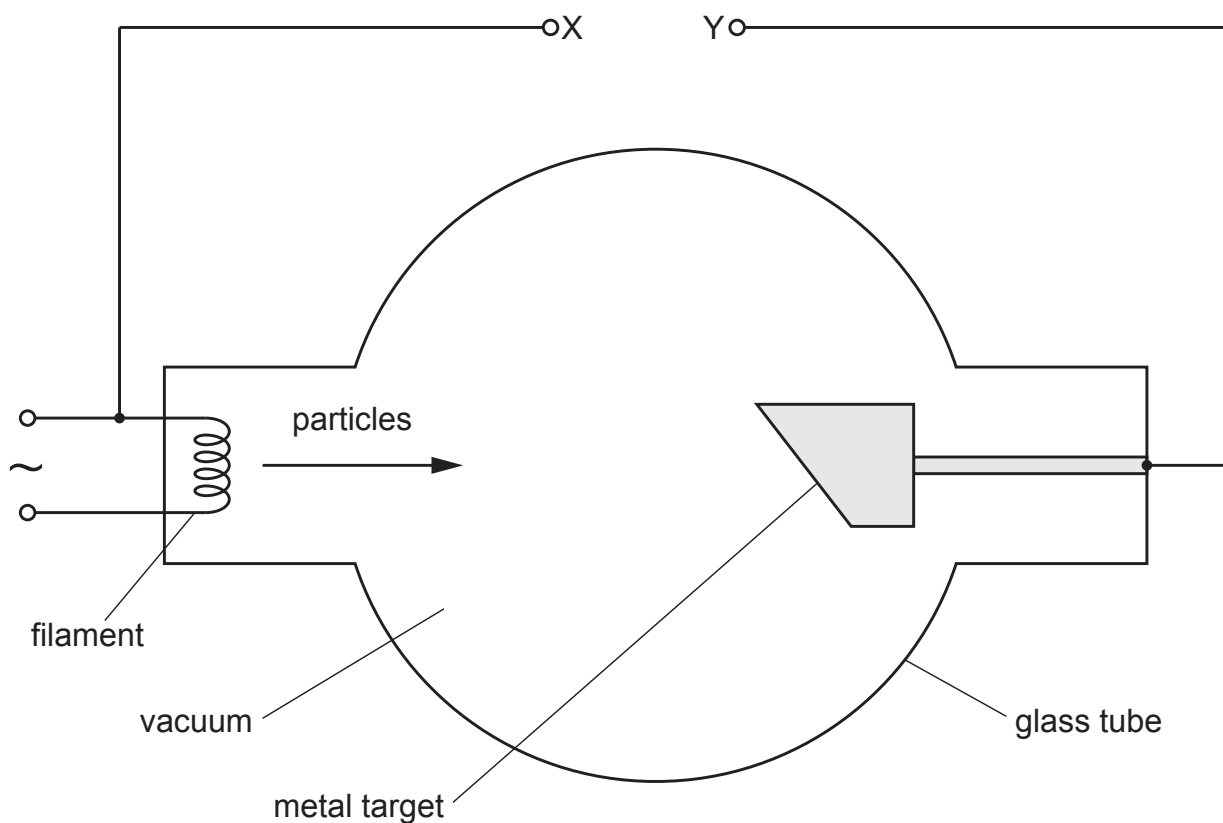


Fig. 8.1

Particles are accelerated from the filament to the target by a constant high voltage applied across the terminals X and Y.

(i) State the name of the particles.

..... [1]

(ii) On Fig. 8.1, use + and – signs to label terminals X and Y to indicate the polarity of the high voltage. [1]

- (c) For an accelerating voltage of 32 kV in Fig. 8.1, determine:
- (i) the maximum energy, in MeV, of an X-ray photon produced at the target
- maximum photon energy = MeV [1]
- (ii) the maximum momentum of an X-ray photon produced at the target
- maximum photon momentum = N s [2]
- (iii) the minimum wavelength of X-rays produced at the target.
- minimum wavelength = m [3]

- (d) Explain why X-rays can be used to produce images of internal body structures that have good contrast.
-
-
-
-
- [3]

[Total: 13]

- 10** Ultrasound and X-rays are both types of wave that are used in medical diagnosis to form images of internal body structures.
- (a)** Complete Table 10.1 to state, for each type of wave:
- the method of production of the wave
 - whether the wave that is detected and used to form the image is the wave that has been absorbed, reflected or transmitted by the internal body structure.

Table 10.1

	ultrasound	X-rays
method of production		
detected wave (absorbed, reflected or transmitted)		

[4]

- (b) (i)** For one type of wave passing through tissue, the wave has 72% of its initial intensity after it has passed through 6.2 cm of the tissue.
- Calculate the linear attenuation coefficient μ of the tissue for this wave.

$\mu = \text{..... cm}^{-1}$ [2]

- (ii)** Another wave of the same type as in **(b)(i)** passes through 9.3 cm of the same tissue.
- Calculate the percentage of the initial intensity of the wave that is attenuated by the tissue.

percentage attenuated = % [2]

- 10 (a) X-rays for use in medical diagnosis are produced in an X-ray tube. In the X-ray tube, charged particles are accelerated towards a metal target by an applied potential difference (p.d.).
- (i) State the name of the charged particles that are accelerated by the applied p.d.
- [1]
- (ii) Explain how X-rays are produced at the metal target.
-
-
-
- [2]
- (iii) Calculate the minimum wavelength of X-rays produced when the applied p.d. is 5.80 kV.

wavelength = m [3]

- (b) X-rays pass through a medium that has an attenuation coefficient of 1.4 cm^{-1} .
- Calculate the percentage of the X-ray energy that is **absorbed** by a 2.8 cm thickness of this medium.

percentage absorbed = % [3]

[Total: 9]