

Past-paper walk-through

Ampère's Law ■ 12.4

eXercise

Questions in this set

- 2026 Q1
- 2019 Set 1 Q3
- 2018 Q3
- 2017 Q3

Reading the mark scheme

- **B1** a mark that stands on its own – the point is either made or not.
- **M1** a *method* mark: the right approach, even if the number is wrong.
- **A1** an *answer* mark, and it usually needs its M mark first.
- **C1** a working mark on the way to the answer.
- **//** separates answers the examiner accepts equally.
- **ecf** = error carried forward: a later part is marked on your own earlier answer.
- **owtte** = “or words to that effect” – the wording need not match.

Question 1

2026 ■ Q1

Two very long, cylindrical, current-carrying Wires S and T are oriented parallel to the y -axis, as shown in Figure 1. The centers of the wires are in the xy -plane. The wires are described as follows.

- Wire S has radius $2a$ and is centered at $x = 0$. Wire S has nonuniform current density and carries total current I_0 in the $+y$ -direction. The magnitude of the current density in Wire S as a function of the radial distance r from the center of the wire is described by $J = Cr$, where C is a positive constant.
- Wire T has radius a and is centered at $x = 10a$. Wire T has uniform current density and carries total current I_0 in the $-y$ -direction.

Question 1

[Figure 1: Cross-section diagram in the xy -plane. Wire S is a shaded cylindrical bar centered at $x = 0$ spanning from $-2a$ to $2a$, with a y -axis arrow through its center pointing up (current I_0 in $+y$ -direction) and a label $J = Cr$ pointing to the wire. Point P is marked inside Wire S, above the center axis, at horizontal position $x = a$. Wire T is a shaded cylindrical bar centered at $x = 10a$ spanning from $9a$ to $11a$, with a downward arrow through its center (current I_0 in $-y$ -direction). The x -axis is marked with gridlines at $-2a, 0, 2a, 4a, 6a, 8a, 10a$.]


(a)(i) Point P is located inside of Wire S at horizontal position $x = a$. **Derive** an expression for the magnitude of the magnetic field at Point P due only to the current in Wire S in terms of C , a , and physical constants, as appropriate. Begin your derivation by writing a fundamental physics principle or an equation from the reference information.

Question 1


(a)(ii) On the axes shown in Figure 2, ****sketch**** a graph of the magnitude B of the magnetic field due to the currents in both wires as a function of x along the x -axis in the region $2a \leq x \leq 9a$. Sketches made in the shaded region will not be graded.

[Figure 2: A blank graph grid with vertical axis B and horizontal axis x , gridlines marked at $O, 2a, 3a, 4a, 5a, 6a, 7a, 8a, 9a$. The region from O to $2a$ is shaded (not to be used); the region from $2a$ to $9a$ is the graded sketch area.]


Question 1

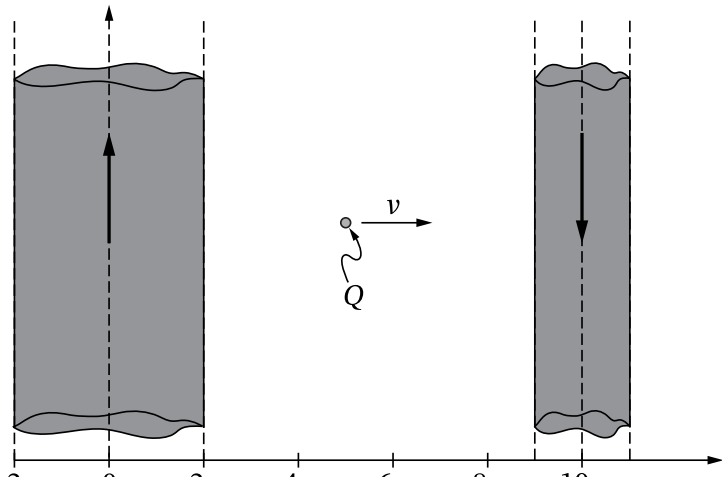

Question 1

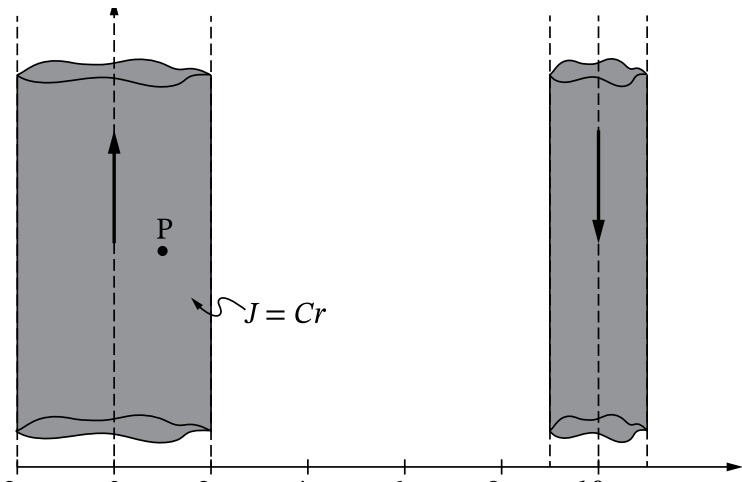

Question 1

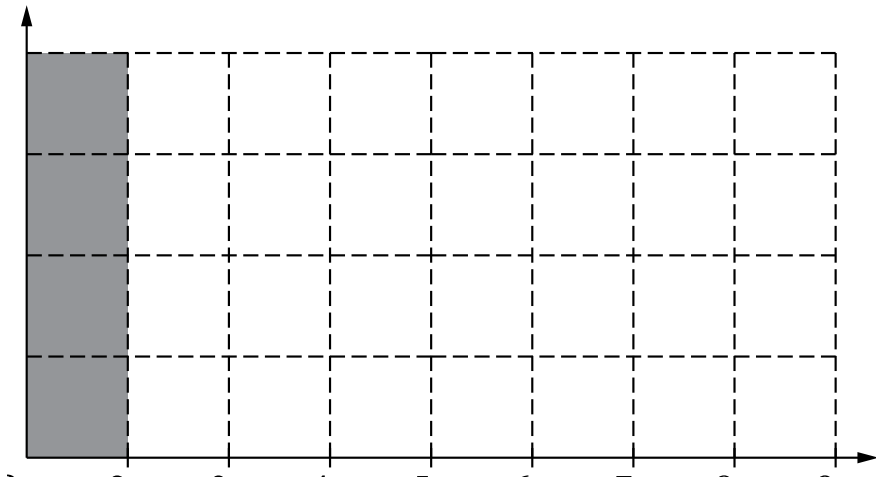

Question 1

2026 ■ Q1

Two very long, cylindrical, current-carrying Wires S and T are oriented parallel to the y -axis, as shown in Figure 1. The centers of the wires are in the xy -plane. The wires are described as follows.

- Wire S has radius $2a$ and is centered at $x = 0$. Wire S has nonuniform current density and carries total current I_0 in the $+y$ -direction. The magnitude of the current density in Wire S as a function of the radial distance r from the center of the wire is described by $J = Cr$, where C is a positive constant.
- Wire T has radius a and is centered at $x = 10a$. Wire T has uniform current density and carries total current I_0 in the $-y$ -direction.

Question 1

[Figure 1: Cross-section diagram in the xy -plane. Wire S is a shaded cylindrical bar centered at $x = 0$ spanning from $-2a$ to $2a$, with a y -axis arrow through its center pointing up (current I_0 in $+y$ -direction) and a label $J = Cr$ pointing to the wire. Point P is marked inside Wire S, above the center axis, at horizontal position $x = a$. Wire T is a shaded cylindrical bar centered at $x = 10a$ spanning from $9a$ to $11a$, with a downward arrow through its center (current I_0 in $-y$ -direction). The x -axis is marked with gridlines at $-2a, 0, 2a, 4a, 6a, 8a, 10a$.]

(b) At the instant shown in Figure 3, a small sphere with charge Q is at horizontal position $x = 5a$ and moving in the xy -plane with speed v in the $+x$ -direction. At this instant, the net magnetic force exerted on the sphere due to the currents in Wires S and T has magnitude F .

[Figure 3: Same wire configuration as Figure 1 (Wire S centered at $x = 0$ with current I_0 in $+y$ -direction, Wire T centered at $x = 10a$ with current I_0 in $-y$ -direction). A

Question 1

small circle labeled Q is shown at $x = 5a$, midway between the wires, with an arrow labeled v pointing in the $+x$ -direction.]

Derive an expression for F in terms of a , Q , I_0 , v , and physical constants, as appropriate. Begin your derivation by writing a fundamental physics principle or an equation from the reference information.

Question 3

2019 Set 1 ■ Q3

Note: Figures not drawn to scale.

[Figure, left ("Solenoid"): A solenoid of inner radius a and length ℓ with current I entering, wound with wire, oriented along its axis.]

[Figure, right ("Cutaway View"): A cutaway view of the solenoid showing the xyz-coordinate system, with the x-axis along the axis of the solenoid, current I shown entering at the near end, point P at the origin in the middle of the solenoid, and the y- and z-axes shown perpendicular to the x-axis at P.]

A solenoid is used to generate a magnetic field. The solenoid has an inner radius a , length ℓ , and N total turns of wire. A power supply, not shown, is connected to the solenoid and generates current I , as shown in the figure on the left above. The x-axis runs along the axis of the solenoid, as shown in the cutaway view on the right above.

Question 3

Point P is in the middle of the solenoid at the origin of the xyz-coordinate system, as shown in the cutaway view. Assume $\ell \gg a$.


(a) Select the correct direction of the magnetic field at point P.

_____ +x-direction _____ +y-direction _____ +z-direction _____ -x-direction _____
-y-direction _____ -z-direction


Justify your selection.

Question 3

axis at the center of the solenoid. The plot of the magnetic field strength B as a function of power supply is shown below.

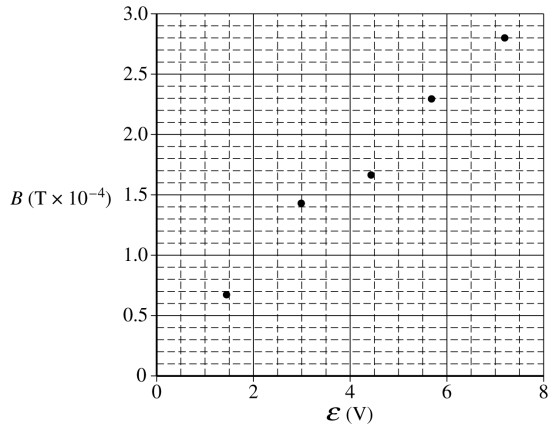


Question 3

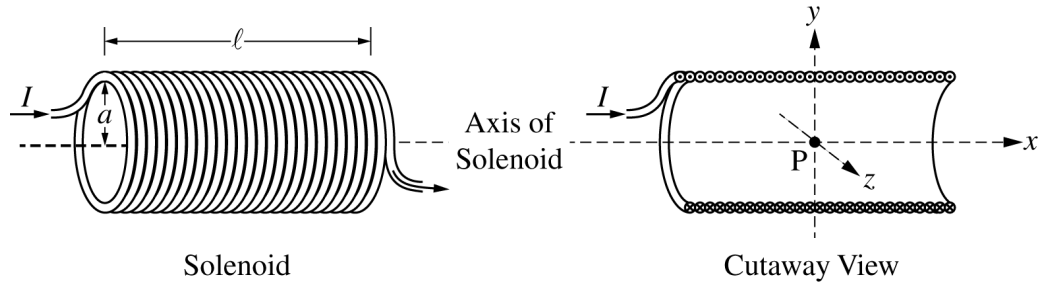

Note: Figures not drawn to scale.

Question 3

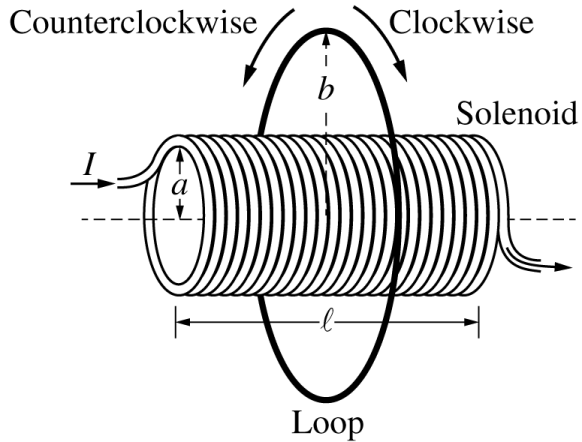

Question 3

2019 Set 1 ■ Q3

Note: Figures not drawn to scale.

[Figure, left ("Solenoid"): A solenoid of inner radius a and length ℓ with current I entering, wound with wire, oriented along its axis.]

[Figure, right ("Cutaway View"): A cutaway view of the solenoid showing the xyz-coordinate system, with the x-axis along the axis of the solenoid, current I shown entering at the near end, point P at the origin in the middle of the solenoid, and the y- and z-axes shown perpendicular to the x-axis at P.]

A solenoid is used to generate a magnetic field. The solenoid has an inner radius a , length ℓ , and N total turns of wire. A power supply, not shown, is connected to the solenoid and generates current I , as shown in the figure on the left above. The x-axis runs along the axis of the solenoid, as shown in the cutaway view on the right above. Point P is in the middle of the

Question 3

solenoid at the origin of the xyz-coordinate system, as shown in the cutaway view. Assume $\ell \gg a$.

(b)(i) On the cutaway view below, clearly draw an Amperian loop that can be used to determine the magnetic field at point P at the center of the solenoid.

[Figure: Cutaway view of the solenoid with current I entering along the "Axis of Solenoid" dashed line, and point P marked at the center of the solenoid; blank for the student to draw an Amperian loop.]

(b)(ii) Use Ampere's law to derive an expression for the magnetic field strength at point P. Express your answer in terms of I , ℓ , N , a , and physical constants, as appropriate.

Some physics students conduct an experiment to determine the resistance R_S of a solenoid with radius $a = 0.015$ m, total turns $N = 100$, and total length $\ell = 0.40$ m. The students connect the solenoid to a variable power supply. A magnetic field sensor

Question 3

is used to measure the magnetic field strength along the central axis at the center of the solenoid. The plot of the magnetic field strength B as a function of the emf $\mathcal{E}$ of the power supply is shown below.

[Graph: Scatter plot of B ($\text{T} \times 10^{-4}$) on the vertical axis, ranging 0 to 3.0 in increments of 0.5, versus $\mathcal{E}$ (V) on the horizontal axis, ranging 0 to 8 in increments of 2. Data points approximately at: (1.6, 0.65), (3.0, 1.4), (4.2, 1.55), (5.4, 2.35), (6.8, 2.85). Grid lines shown throughout; no line drawn yet — student draws a best-fit line.]

Question 3

2019 Set 1 ■ Q3

Note: Figures not drawn to scale.

[Figure, left ("Solenoid"): A solenoid of inner radius a and length ℓ with current I entering, wound with wire, oriented along its axis.]

[Figure, right ("Cutaway View"): A cutaway view of the solenoid showing the xyz-coordinate system, with the x-axis along the axis of the solenoid, current I shown entering at the near end, point P at the origin in the middle of the solenoid, and the y- and z-axes shown perpendicular to the x-axis at P.]

A solenoid is used to generate a magnetic field. The solenoid has an inner radius a , length ℓ , and N total turns of wire. A power supply, not shown, is connected to the solenoid and generates current I , as shown in the figure on the left above. The x-axis runs along the axis of the solenoid, as shown in the cutaway view on the right above. Point P is in the middle of the

Question 3

solenoid at the origin of the xyz-coordinate system, as shown in the cutaway view. Assume $\ell \gg a$.

(c)(i) On the graph above, draw a best-fit line for the data.

(c)(ii) Use the straight line to determine the resistance R_S of the solenoid used in the experiment.

Question 3

2019 Set 1 ■ Q3

Note: Figures not drawn to scale.

[Figure, left ("Solenoid"): A solenoid of inner radius a and length ℓ with current I entering, wound with wire, oriented along its axis.]

[Figure, right ("Cutaway View"): A cutaway view of the solenoid showing the xyz-coordinate system, with the x-axis along the axis of the solenoid, current I shown entering at the near end, point P at the origin in the middle of the solenoid, and the y- and z-axes shown perpendicular to the x-axis at P.]

A solenoid is used to generate a magnetic field. The solenoid has an inner radius a , length ℓ , and N total turns of wire. A power supply, not shown, is connected to the solenoid and generates current I , as shown in the figure on the left above. The x-axis runs along the axis of the solenoid, as shown in the cutaway view on the right above. Point P is in the middle of the

Question 3

solenoid at the origin of the xyz-coordinate system, as shown in the cutaway view. Assume $\ell \gg a$.

(d)(i) One of the students notes that the horizontal component of the magnetic field of Earth is $2.5 \times 10^{-5} \text{ T}$. Is there evidence from the graph that the horizontal orientation of the solenoid affects the measured values for B ?

γ_{No}^{es}

Justify your answer.

(d)(ii) Would the horizontal orientation of the solenoid affect the calculated value for R_S ?

γ_{No}^{es}

Justify your answer.

Question 3

[Figure: A solenoid with current I entering, inner radius a , length ℓ , labeled "Solenoid." A thin conducting loop of radius b is shown concentric with and around the solenoid, with curved arrows labeled "Counterclockwise" and "Clockwise" indicating the two possible current directions in the loop, labeled "Loop."]

A thin conducting loop of radius b and resistance R_L is placed concentric with the solenoid, as shown above. The current in the solenoid is decreased from I to zero over time Δt .

Question 3

2019 Set 1 ■ Q3

Note: Figures not drawn to scale.

[Figure, left ("Solenoid"): A solenoid of inner radius a and length ℓ with current I entering, wound with wire, oriented along its axis.]

[Figure, right ("Cutaway View"): A cutaway view of the solenoid showing the xyz-coordinate system, with the x-axis along the axis of the solenoid, current I shown entering at the near end, point P at the origin in the middle of the solenoid, and the y- and z-axes shown perpendicular to the x-axis at P.]

A solenoid is used to generate a magnetic field. The solenoid has an inner radius a , length ℓ , and N total turns of wire. A power supply, not shown, is connected to the solenoid and generates current I , as shown in the figure on the left above. The x-axis runs along the axis of the solenoid, as shown in the cutaway view on the right above. Point P is in the middle of the

Question 3

solenoid at the origin of the xyz-coordinate system, as shown in the cutaway view. Assume $\ell \gg a$.

(e)(i) Is the direction of the induced current in the loop clockwise or counterclockwise during the time period that the current in the solenoid is decreasing?

_____ Clockwise _____ Counterclockwise

Justify your answer.

(e)(ii) Derive an equation for the average induced current i_{IND} in the loop during the time period that the current in the solenoid is decreasing. Express your answer in terms of I , ℓ , N , a , b , R_L , R_S , Δt , and physical constants, as appropriate.

Solution 3

(a)

Mark scheme

- $+x$ -direction (1 pt for choosing this with a justification attempt). Justification (1 pt): using the right-hand rule for a solenoid – curl the fingers of the right hand in the direction of current flow around the loops – the thumb points in the $+x$ -direction, so the magnetic field at the center of the solenoid (point P) points in the $+x$ -direction. (Equivalently: using the right-hand rule for the current on the near/left side of the solenoid, the fingers curl into the loop and point in the $+x$ direction at the axis.)

Solution 3

(b)(i)

Mark scheme

- Draw a rectangular Amperian loop with one long side lying along the central axis of the solenoid, passing through point P (the side where B is to be found), and the opposite long side lying outside the solenoid (where $B \approx 0$); the two short sides are perpendicular to the axis. Both long sides must stay within the solenoid's length ℓ (must not extend beyond the ends of the solenoid). 1 point.

Solution 3

(b)(ii) Mark scheme

- Apply Ampere's law around the rectangular loop (4 segments):

$\oint \mathbf{B} \cdot d\boldsymbol{\ell} = \mu_0 I_{enc} \therefore (\int \mathbf{B} d\boldsymbol{\ell})_1 + (\int \mathbf{B} d\boldsymbol{\ell})_2 + (\int \mathbf{B} d\boldsymbol{\ell})_3 + (\int \mathbf{B} d\boldsymbol{\ell})_4 = \mu_0 I_{enc}$. The two perpendicular segments and the outside leg contribute zero (either $\mathbf{B} \perp d\boldsymbol{\ell}$, or $\mathbf{B} \approx 0$ outside), leaving $(\int \mathbf{B} d\boldsymbol{\ell})_1 + 0 + (-\int \mathbf{B} d\boldsymbol{\ell})_1 + Bh = \mu_0 \frac{N}{\ell} hI$, where h is the length of the on-axis segment and $\mu_0 \frac{N}{\ell} hI$ is the enclosed current (the fraction h/ℓ of the N turns, each carrying current I) – this simplifies to $Bh = \mu_0 \frac{N}{\ell} hI$ (1 pt for correctly applying Ampere's law this way). Solving: $B = \frac{\mu_0 NI}{\ell}$ (1 pt for the correct final answer).

Solution 3

(c)(i)

Mark scheme

- Draw a straight best-fit line through the plotted $(\mathcal{E}, B)$ data points, positioned so that at least one data point lies above the line and at least one lies below it, following the overall positive-slope trend of the data (roughly rising from about $(1 \text{ V}, 0.3 \times 10^{-4} \text{ T})$ to $(7 \text{ V}, 2.6 \times 10^{-4} \text{ T})$). 1 point.

Solution 3

(c)(ii) Mark scheme

- Compute the slope from the best-fit line, not raw data points (1 pt):

$$\text{slope} = \frac{\Delta B}{\Delta \mathcal{E}} = \frac{(2.5 - 0.9) \times 10^{-4} \text{ T}}{(6.4 - 2.0) \text{ V}} = 0.36 \times 10^{-4} = 3.6 \times 10^{-5} \text{ T/V. Relate}$$

the slope to R_S (1 pt): since $B = \frac{\mu_0 N I}{\ell}$ and (treating the solenoid as the circuit's resistance) $I = \mathcal{E}/R_S$, we get $B = \frac{\mu_0 N \mathcal{E}}{\ell R_S}$, so

$$\text{slope} = \frac{\mu_0 N}{\ell R_S} \Rightarrow R_S = \frac{\mu_0 N}{\ell \times \text{slope}} = \frac{(4\pi \times 10^{-7} \text{ T m/A})(100)}{(0.40 \text{ m})(3.6 \times 10^{-5} \text{ T/V})} = 8.7 \Omega.$$

Solution 3

(d)(i) Mark scheme

- Yes – the best-fit line does not pass through the origin (there is a nonzero B -intercept of roughly $0.3 \times 10^{-4} \text{ T}$ at $\mathcal{E} = 0$). 1 point for a correct justification, e.g.: the horizontal component of Earth's magnetic field adds to or subtracts from the solenoid's own field depending on how the solenoid is oriented, which offsets the measured B values and is evidence that orientation affects them. (If a student's line does pass through the origin, 'No' with the matching justification – the line passing through the origin meaning $B = 0$ when $\mathcal{E} = 0$, so Earth's field is not affecting the values – also earns full credit.)

Solution 3

(d)(ii)

Mark scheme

- No. 1 point for a correct justification: Earth's horizontal field component is a constant additive offset to B – it shifts the line's intercept but does not change its slope as $\mathcal{E}$ (and hence I) is varied. Since R_S is calculated from the slope of the line (not its intercept), the horizontal orientation of the solenoid does not affect the calculated value of R_S .

Solution 3

(e)(i) Mark scheme

- Clockwise. 1 point for a justification indicating that the magnetic field inside the solenoid (and hence through the loop) will decrease as the solenoid's current decreases. 1 point for using Lenz's law to relate this decreasing field to the induced current's direction: since the solenoid's field points in $+x$ and is decreasing, the loop's induced current opposes the decrease by creating its own field also in the $+x$ direction inside the loop; by the right-hand rule, producing a $+x$ -directed field means the current in the loop must flow clockwise (as viewed per the figure's labeled Clockwise/Counterclockwise arrows).

Solution 3

(e)(ii) Mark scheme

- Faraday's law (1 pt): $\mathcal{E} = \left| \frac{d\Phi}{dt} \right| = \frac{d(BA)}{dt} = A \frac{\Delta B}{\Delta t}$. Ohm's law for the loop (1 pt): $I_{IND} = \frac{V}{R} = \frac{A \Delta B / \Delta t}{R_L} = \frac{A \Delta B}{R_L \Delta t}$. Using the correct area – the solenoid's cross-sectional area $A = \pi a^2$ (radius a , NOT the larger loop radius b , since only the flux through the solenoid's cross-section threads the loop) – and $\Delta B = \frac{\mu_0 NI}{\ell}$ (the field drops from $\frac{\mu_0 NI}{\ell}$ to 0) (1 pt): $I_{IND} = \frac{\pi a^2 \mu_0 NI / \ell}{R_L \Delta t} = \frac{\pi a^2 \mu_0 NI}{R_L \ell \Delta t}$.

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The

Question 3

wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(a) Use Ampere's law to derive an expression for the magnitude of the magnetic field at point P due to wire 1.

Question 3

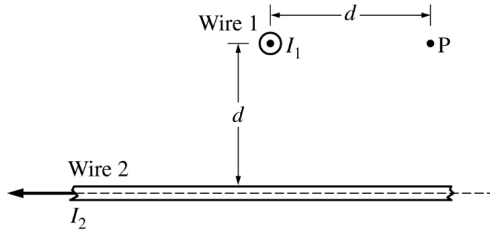


Figure 1. Side view

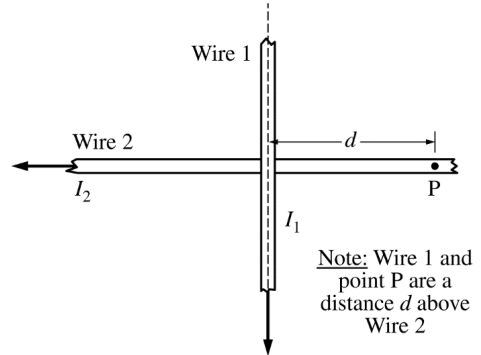


Figure 2. Top view

Question 3

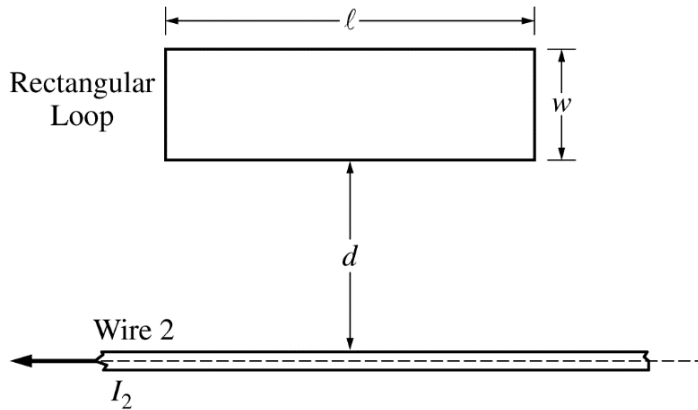


Figure 3. Side view

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(b) Derive an expression for the magnitude of the net magnetic field at point P.

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(c) Calculate the numerical value of the angle to the horizontal for the direction of the net magnetic field at point P.

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(d) Wire 1 is now released. Which of the following best describes the initial motion of wire 1 due to the magnetic field of wire 2? Assume gravitational effects are negligible.

- ☐ Wire 1 will not move.
- ☐ Wire 1 will move upward as viewed in Figure 1.
- ☐ Wire 1 will move downward as viewed in Figure 1.
- ☐ Wire 1 will rotate clockwise as viewed in Figure 2.
- ☐ Wire 1 will rotate counterclockwise as viewed in Figure 2.

Justify your answer.

[Figure 3. Side view: A rectangular loop of length ℓ (horizontal) and width w (vertical) is positioned above Wire 2, at a distance d from Wire 2 (measured from the bottom

Question 3

side of the loop down to the wire). Wire 2 (hatched double line) carries current I_2 directed to the left. The long side of the loop is parallel to the wire.]

Wire 1 is now replaced by a conducting rectangular loop of length ℓ , width w , and resistance R . The loop is placed a distance d from wire 2, as shown. The loop, wire, and distance d are all in the plane of the page. The long side of the loop is parallel to the wire. The current I_2 for wire 2 is decreasing linearly as a function of time t according to the equation $I_2 = 2I_0(1 - kt)$, where k is a positive constant with units of s^{-1} .

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(e) Of the following, select the integration that will give an expression for the flux Φ as a function of time t .

$$\Phi = \int_{r=d}^{r=d+w} \frac{\mu_0(2I_0)(1-kt)\ell w}{2\pi} dr$$

$$\Phi = \int_{r=d}^{r=d+w} \frac{\mu_0(2I_0)(1-kt)\ell w}{2\pi} dr$$

$$\Phi = \int_{r=d}^{r=d+w} \frac{\mu_0(2I_0)(1-kt)}{2\pi r} \ell dr$$

$$\Phi = \int_{r=d}^{r=d+w} \frac{\mu_0(2I_0)(1-kt)}{2\pi r} \ell dr$$

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(f) Given that the flux through the rectangular loop as a function of time t is given by the equation

$$\Phi = \frac{\mu_0 I_0 \ell (1 - kt)}{\pi} \ln \left(\frac{d + w}{d} \right)$$

derive an expression for the magnitude of the current, if any, induced in the loop. Express your answers in terms of I_0 , d , r , R , w , k , ℓ , and physical constants, as appropriate.

Question 3

2018 ■ Q3

[Figure 1. Side view: Wire 1 is shown end-on (circle with a dot, $\odot I_1$) with current I_1 directed out of the page; point P is a horizontal distance d from Wire 1. Wire 1 is a vertical distance d above Wire 2, which is drawn as a long horizontal wire (hatched double line) carrying current I_2 directed to the left.]

[Figure 2. Top view: Wire 1 is drawn as a vertical wire (with dashed extension above), Wire 2 is a horizontal wire to the left of Wire 1 carrying current I_2 directed to the left, and point P is a horizontal distance d to the right of Wire 1 along the same horizontal line as Wire 2's continuation. A note states: "Wire 1 and point P are a distance d above Wire 2." The current I_1 in Wire 1 is shown directed downward (out of the top-view plane arrangement).]

The figures above represent different views of two long, straight, horizontal wires, 1 and 2, carrying currents $I_1 = I$ and $I_2 = 2I$, respectively, in the directions shown. The wires are held in place. In Figure 1, the current in wire 1 is directed out of the page, and wire 1 is a distance d above wire 2. Point P is a horizontal distance d from wire 1 and a distance d directly above

Question 3

wire 2. Express your answers to parts (a) and (b) in terms of I , d , and physical constants, as appropriate.

(g) What is the direction of the current, if any, induced in the loop as seen in Figure 3?
_____ Clockwise _____ Counterclockwise _____ Undefined, because there is no current induced in the loop
Justify your answer.

Solution 3

(a)

Mark scheme

- Apply Ampere's law around a circular loop of radius d centered on wire 1:
 $\oint \vec{B} \cdot d\vec{\ell} = \mu_0 I \Rightarrow B(2\pi d) = \mu_0 I$ (1 point). Solve: $B = \frac{\mu_0 I}{2\pi d}$ (1 point).

Solution 3

(b) Mark scheme

- Field magnitudes at P: $B_1 = \frac{\mu_0 I}{2\pi d}$ from wire 1, and since $I_2 = 2I$,
 $B_2 = \frac{\mu_0(2I)}{2\pi d} = \frac{\mu_0 I}{\pi d}$ from wire 2 (1 point, for indicating $B_2 = 2B_1$). Because B_1 and B_2 are perpendicular at P, the net field is their vector sum:
$$B_{net} = \sqrt{B_1^2 + B_2^2} = \sqrt{\left(\frac{\mu_0 I}{2\pi d}\right)^2 + \left(\frac{\mu_0(2I)}{2\pi d}\right)^2} = \frac{\sqrt{5}\mu_0 I}{2\pi d} \text{ (1 point).}$$

Solution 3

(c)

Mark scheme

- Relate the angle to the two perpendicular field components: $\theta = \tan^{-1} \left(\frac{B_1}{B_2} \right)$
(1 point). Substitute $B_1 = \mu_0 I / 2\pi d$, $B_2 = \mu_0 (2I) / 2\pi d$:
 $\theta = \tan^{-1}(1/2) = 26.6^\circ$ (1 point).

Solution 3

(d)

Mark scheme

- Answer: Wire 1 will rotate clockwise as viewed in Figure 2. Justification: there is no net translational motion because the magnetic forces on the wire from wire 2's field cancel (1 point) — but there is a net torque causing rotation (1 point). Example: the top portion of wire 1 sits in a field into the page from wire 2 and feels a force to the right; the bottom portion sits in a field out of the page from wire 2 and feels a force to the left. The net force is zero, but the net torque is clockwise, so the wire rotates clockwise.

Solution 3

(e)

Mark scheme

- Correct choice: $\Phi = \int_{r=d}^{r=d+w} \frac{\mu_0(2I_0)(1-kt)}{2\pi r} \ell dr$ — the integrand is the field from wire 2 at distance r , $B(r) = \frac{\mu_0(2I_0)(1-kt)}{2\pi r}$, times the strip area element ℓdr , integrated over the loop's radial extent from $r = d$ to $r = d + w$.

Solution 3

(f) Mark scheme

- Take the time derivative of the given flux to get the EMF:

$$\varepsilon = \left| -\frac{d\Phi}{dt} \right| = \frac{\mu_0 I_0 \ell}{\pi} \ln\left(\frac{d+w}{d}\right) \left| \frac{d}{dt}(1-kt) \right| = \frac{\mu_0 I_0 k \ell}{\pi} \ln\left(\frac{d+w}{d}\right) \quad (1 \text{ point}).$$

Divide by the loop's resistance R to get the induced current: $I = \frac{\varepsilon}{R}$ (1 point).

Final answer: $I = \frac{\mu_0 I_0 k \ell}{\pi R} \ln\left(\frac{d+w}{d}\right)$ (1 point).

Solution 3

(g)

Mark scheme

- Answer: Clockwise, with a justification attempt (1 point). Reasoning: since I_2 is decreasing, the flux through the loop is decreasing (1 point). By Lenz's law, the induced current opposes this decrease, so it must create a magnetic field into the page inside the loop, meaning the induced current flows clockwise (1 point).

Question 3

2017 ■ Q3

[Figure: a trapezoidal table setup showing a solenoid of length ℓ (a coiled wire wound on a hollow tube) connected in series with a resistor, and a power supply (with a dial/gauge, terminals $+$ and $-$) and a multimeter (with a digital display and a dial selector) sitting on the table nearby, not yet wired together.]

When studying Ampere's law, students collect data on the magnetic field of two different solenoids in order to determine the magnetic permeability of free space μ_0 .

The solenoids are created by wrapping wire around a hollow plastic tube. The solenoids of length ℓ with N turns of wire will be connected in series to a power supply and resistor. A multimeter will be used as an ammeter to measure the magnitude of the current I through the solenoids. The main components for the setup with one of the solenoids are shown in the figure above.

Question 3

(a)(i) On the figure above, draw wire connections between the solenoid, power supply, resistor, and multimeter that will complete the circuit and allow students to measure the magnitude of the current through the solenoid.

(a)(ii) Using the connections you made in part (a)i above, what will be the direction of the magnetic field inside the solenoid?

_____ Toward the top of the page _____ To the left _____ Out of the page _____
Toward the bottom of the page _____ To the right _____ Into the page

The rectangle shown below represents the solenoid (the loops of wire are not shown). Points A , B , and C are along the central axis of the solenoid with point B at the middle of the solenoid. Point D is directly above point B .

[Diagram: a rectangle representing the solenoid, with dot D above the rectangle at its midpoint, and inside the rectangle three dots along the central axis labeled $\bullet A$, $\bullet B$

Question 3

(both toward the left-middle), and $\bullet C$ (toward the right edge, outside the main cluster of A and B , near the right end).]

(a)(iii) From the choices below, select the point where you would place a magnetic field probe (a probe that can measure the magnitude of the magnetic field) to best measure the strength of the magnetic field of the solenoid in order to determine the magnetic permeability of free space μ_0 .

$A_B C_D$

Justify your answer based on the model for a simple solenoid.

The figures below show two different solenoids that will be connected in the circuit above. Solenoid 1 has a length $\ell = 25$ cm with $N = 100$ turns. Solenoid 2 has a length $\ell = 5.0$ cm with $N = 5$ turns.

Question 3

[Two diagrams of coiled solenoids: "Solenoid 1" shown as a long tightly-wound coil, and "Solenoid 2" shown as a short coil with few turns. Note: Figures not drawn to scale.]


A graph of the magnitude of the magnetic field B as a function of NI/ℓ is shown below. The best-fit lines for the data are shown as a solid line for solenoid 1 and as a dashed line for solenoid 2.

[Graph: vertical axis B ($\text{T} \times 10^{-5}$) ranging 0 to 12 in increments of 2; horizontal axis $\frac{NI}{\ell}$ ($\frac{\text{A}}{\text{m}}$) ranging 0 to 100 in increments of 20. Solid line "Solenoid 1" is a best-fit line through filled data points, rising from about (12, 2.3) to about (95, 11), roughly linear with a positive y -intercept near 0.5–1. Dashed line "Solenoid 2" is a best-fit line through open-circle data points, rising from about (15, 1.7) to about (85, 9), also


Question 3

roughly linear, lying slightly below Solenoid 1's line at low NI/ℓ and crossing to be below it at high NI/ℓ as well, with more scatter in its data points.]

Question 3

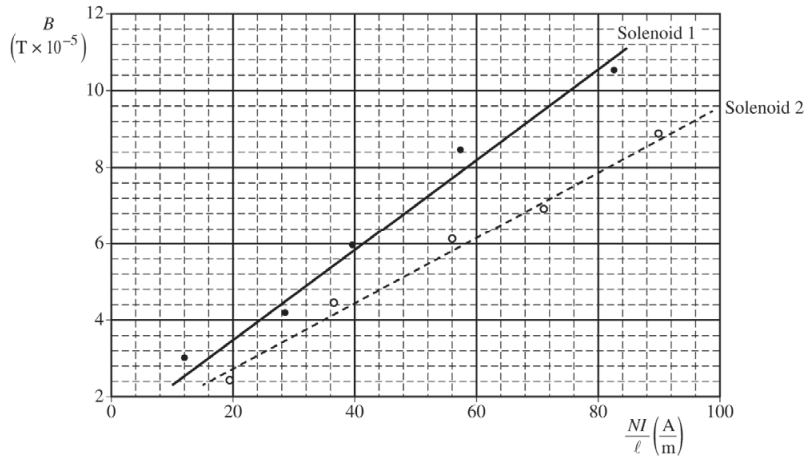

Question 3

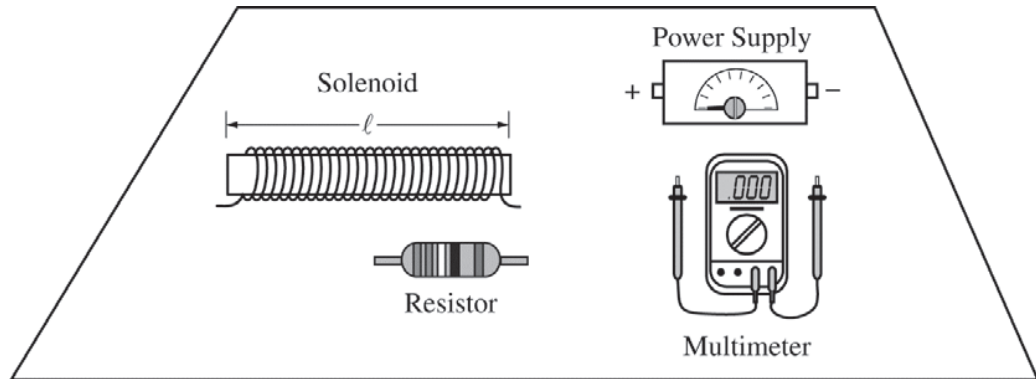


Question 3

The figures below show two different solenoids that will be connected in the circuit above. Solenoid 1 has a length $\ell = 25$ cm with $N = 100$ turns. Solenoid 2 has a length $\ell = 5.0$ cm with $N = 5$ turns.



Solenoid 1



Solenoid 2

Note: Figures not drawn to scale.

Question 3

2017 ■ Q3

[Figure: a trapezoidal table setup showing a solenoid of length ℓ (a coiled wire wound on a hollow tube) connected in series with a resistor, and a power supply (with a dial/gauge, terminals $+$ and $-$) and a multimeter (with a digital display and a dial selector) sitting on the table nearby, not yet wired together.]

When studying Ampere's law, students collect data on the magnetic field of two different solenoids in order to determine the magnetic permeability of free space μ_0 . The solenoids are created by wrapping wire around a hollow plastic tube. The solenoids of length ℓ with N turns of wire will be connected in series to a power supply and resistor. A multimeter will be used as an ammeter to measure the magnitude of the current I through the solenoids. The main components for the setup with one of the solenoids are shown in the figure above.

(b) Which solenoid's best-fit line would give the best results for determining a value for the magnetic permeability of free space μ_0 ?

Question 3

_____ Solenoid 1 _____ Solenoid 2

Justify your answer.

Question 3

2017 ■ Q3

[Figure: a trapezoidal table setup showing a solenoid of length ℓ (a coiled wire wound on a hollow tube) connected in series with a resistor, and a power supply (with a dial/gauge, terminals $+$ and $-$) and a multimeter (with a digital display and a dial selector) sitting on the table nearby, not yet wired together.]

When studying Ampere's law, students collect data on the magnetic field of two different solenoids in order to determine the magnetic permeability of free space μ_0 . The solenoids are created by wrapping wire around a hollow plastic tube. The solenoids of length ℓ with N turns of wire will be connected in series to a power supply and resistor. A multimeter will be used as an ammeter to measure the magnitude of the current I through the solenoids. The main components for the setup with one of the solenoids are shown in the figure above.

(c)(i) Use the slope of the best-fit line for the solenoid chosen in part (b) to calculate the magnetic permeability of free space μ_0 .

Question 3

(c)(ii) Calculate the percent error for the experimental value of the magnetic permeability of free space μ_0 determined in part (c)i.

Question 3

2017 ■ Q3

[Figure: a trapezoidal table setup showing a solenoid of length ℓ (a coiled wire wound on a hollow tube) connected in series with a resistor, and a power supply (with a dial/gauge, terminals $+$ and $-$) and a multimeter (with a digital display and a dial selector) sitting on the table nearby, not yet wired together.]

When studying Ampere's law, students collect data on the magnetic field of two different solenoids in order to determine the magnetic permeability of free space μ_0 . The solenoids are created by wrapping wire around a hollow plastic tube. The solenoids of length ℓ with N turns of wire will be connected in series to a power supply and resistor. A multimeter will be used as an ammeter to measure the magnitude of the current I through the solenoids. The main components for the setup with one of the solenoids are shown in the figure above.

(d)(i) What is a reasonable physical explanation for a best-fit line that does not pass through the origin?

Question 3

(d)(ii) Suppose a student connects the solenoid in a closed circuit similar to the circuit in part (a)i but without the resistor. The student notices the multimeter stops functioning after the power supply is turned on. Explain what causes the failure of the multimeter.

Solution 3

(a)(i)

Mark scheme

- Draw wire connections that form a working circuit: the power supply, solenoid, and resistor connected in series with each other (1 point); the multimeter connected in series with the solenoid/resistor combination so it reads the current through the solenoid (1 point).

Solution 3

(a)(ii)

Mark scheme

- 1 point, awarded for a direction of the magnetic field inside the solenoid (toward top of page / left / out of page / toward bottom / right / into page) that is logically consistent (via the right-hand rule) with the current direction implied by the student's own wiring/connections chosen in part (a)i — there is no single fixed correct choice independent of that answer.

Solution 3

(a)(iii) Mark scheme

- Correct selection: point B (the point at the middle of the solenoid, on its central axis). Justification: the formula for the magnetic field of a solenoid ($B = \mu_0 nI$) is derived for an ideal (infinitely long) solenoid and does not hold outside the solenoid — this rules out points C and D, which lie outside (1 point, for any indication that the field outside the solenoid is less than inside). Near the ends/edges of the solenoid the ideal-solenoid approximation becomes less accurate due to edge effects — this rules out point A (1 point, for any indication that being closer to the center gives a better approximation because it avoids edge effects). Point B, at the solenoid's center, therefore gives the best approximation of an ideal solenoid (1 point, for selecting B).

Solution 3

(b)

Mark scheme

- Correct selection: Solenoid 1. Justification: Solenoid 1 has more turns per unit length than Solenoid 2 (1 point); Solenoid 1 is also longer, and so is more like an ideal (infinite) solenoid (1 point). Since $B = \mu_0 nI$ assumes an ideal solenoid, Solenoid 1's greater turn density and length make it a better approximation, so its best-fit-line slope gives a more accurate experimental value for μ_0 .

Solution 3

(c)(i) Mark scheme

- Calculate the slope for the chosen solenoid (Solenoid 1) using the best-fit line (not individual data points):

$$\text{slope} = \frac{y_2 - y_1}{x_2 - x_1} = \frac{(10 - 4)(\text{T} \times 10^{-5})}{(75 - 24)(\text{A/m})} = 1.17 \times 10^{-6} \text{ T} \cdot \text{m/A}$$
 (1 point, for correctly calculating the slope from the best-fit line, not the data points). Relate the permeability of free space to the slope: $\mu_0 = \text{slope}$ (1 point). Correct units: $\mu_0 = 1.17 \times 10^{-6} \text{ T} \cdot \text{m/A}$ (1 point). [For reference, Solenoid 2's slope, not used here since Solenoid 1 was chosen in part (b):

$$\text{slope} = \frac{(8 - 4)(\text{T} \times 10^{-5})}{(82 - 35)(\text{A/m})} = 8.51 \times 10^{-7} \text{ T} \cdot \text{m/A.}]$$

Solution 3

(c)(ii) Mark scheme

- Use the correct percent-error formula, substituting the accepted value ($\mu_0 = 1.26 \times 10^{-6} \text{ T} \cdot \text{m/A}$) and the experimental value from part (c)i:

$$\% \text{ error} = \frac{|acc - exp|}{acc} \times 100\% = \frac{|(1.26 \times 10^{-6}) - (1.18 \times 10^{-6})|}{1.26 \times 10^{-6}} \times 100\% \approx 6.35\%$$
 (1 point) [as transcribed in the official guideline for Solenoid 1; for Solenoid 2 the analogous calculation gives $\frac{|(1.26 \times 10^{-6}) - (8.51 \times 10^{-7})|}{1.26 \times 10^{-6}} \times 100\% \approx 32.4\%$].

Solution 3

(d)(i)

Mark scheme

- 1 point for a correct explanation involving any extraneous (stray) magnetic field, e.g.: a component of Earth's magnetic field lies along the direction of the solenoid's (inductor's) own magnetic field, shifting the best-fit line so it does not pass through the origin.

Solution 3

(d)(ii)

Mark scheme

- State that either the solenoid (inductor) or the circuit has near-zero resistance (1 point); state that, as a result of this near-zero resistance, the current becomes very high/near-infinite (1 point). Example: the inductor has near-zero resistance, so without the resistor in series with it the inductor draws a near-infinite current, which the multimeter cannot handle — causing the multimeter to stop functioning.