

Question 3: Free-Response Question

15 points


- (a) For drawing and appropriately labeling the downward forces that are exerted on the rod at points P and C 1 point

Scoring Note: Labeling the downward force of tension as F_{block} , $3mg$, or similar, may earn this point.

For drawing and appropriately labeling a leftward force that is exerted on the rod at Point Q 1 point

For drawing and appropriately labeling a force that is directed up and to the right that is exerted on the rod at the pivot, and no extraneous forces are present 1 point

Example Response

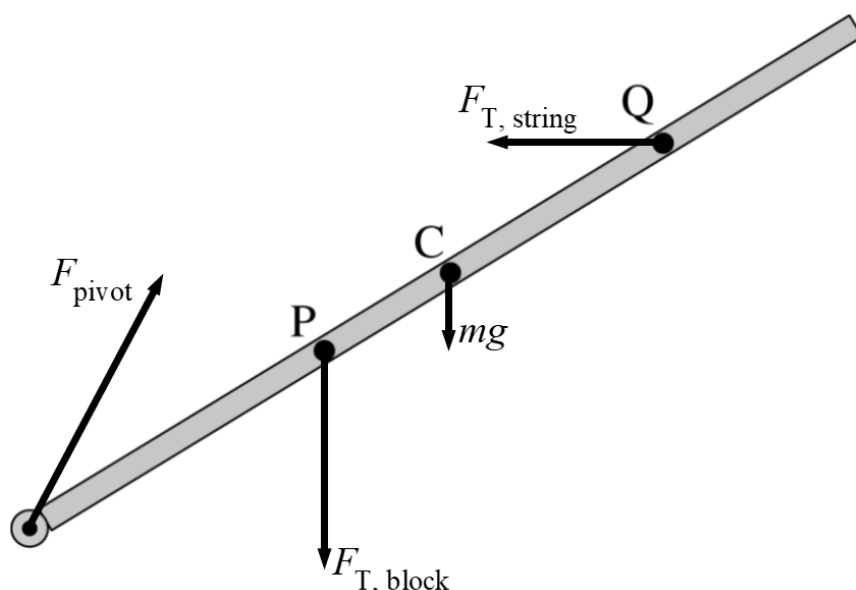

Scoring Note: Examples of appropriate labels for the force due to gravity include: F_G , F_g , F_{grav} , W , mg , Mg , “grav force,” “F Earth on block,” “F on block by Earth,” $F_{\text{Earth on block}}$, $F_{\text{E,Block}}$. The labels G and g are not appropriate labels for the force due to gravity.

Scoring Note: Examples of appropriate labels for the force from the pivot include: F_p , F_{pivot} , F_n , F_N , N , “normal force,” “pivot force.”

Scoring Note: Examples of appropriate labels for the tension force include F_t , F_T , T , F_{string} , and “Force from string.”

Total for part (a) 3 points

(b) For indicating that the net torque exerted on the rod is equal to zero **1 point**

Example Response

$$\Sigma \tau = 0$$

For a correct expression for the torque exerted on the rod by the hanging mass **1 point**

Example Response

$$3mg \sin \theta \left(\frac{3L}{8} \right)$$

For a correct expression for the torque exerted on the rod by the gravitational force **1 point**

Example Response

$$mg \sin \theta \left(\frac{4L}{8} \right)$$

For a correct expression for the torque exerted on the rod by the string **1 point**

Example Responses

$$F_T \sin(90^\circ - \theta) \left(\frac{6L}{8} \right) \quad \text{OR} \quad F_T \cos \theta \left(\frac{6L}{8} \right)$$

Example Solution

$$\Sigma \tau = 0$$

$$3mg \sin \theta \left(\frac{3L}{8} \right) + mg \sin \theta \left(\frac{4L}{8} \right) - F_T \sin(90^\circ - \theta) \left(\frac{6L}{8} \right) = 0$$

$$3mg \sin \theta \left(\frac{3L}{8} \right) + mg \sin \theta \left(\frac{4L}{8} \right) - F_T \cos \theta \left(\frac{6L}{8} \right) = 0$$

$$\left(\frac{9}{8} \right) mg \sin \theta + \left(\frac{4}{8} \right) mg \sin \theta = \left(\frac{6}{8} \right) F_T \cos \theta$$

$$13mg \sin \theta = 6F_T \cos \theta$$

$$F_T = \frac{13}{6} mg \tan \theta$$

Scoring Note: A maximum of three points may be earned if the trigonometric functions (sin and cos) are reversed for all three torque terms.

Total for part (b) 4 points

(c) For indicating that the torque exerted on the rod by the string is always the same **1 point**

For stating that as the angle between the string and the rod increases, the force exerted on the rod by the string decreases **1 point**

Example Response

Because the torque exerted on the rod by the string is always the same, as the angle between the string and the rod increases, the tension $F_{T, \text{new}}$ must decrease.

Total for part (c) 2 points

(d)(i) For indicating the total mass is the sum of differentiable masses along the length of the rod **1 point**

Example Response

$$M = \int dm$$

For correctly writing dm in terms of x **1 point**

Example Response

$$M = \int_0^{1.2} (6 + 10x) dx$$

For a correct numeric answer with correct units **1 point**

Example Response

$$M = 14.4 \text{ kg}$$

Example Solution

$$M = \int dm$$

$$M = \int \lambda dx$$

$$M = \int_0^{1.2} (6 + 10x) dx$$

$$M = \left(6x + \frac{10x^2}{2} \right) \bigg|_0^{1.2 \text{ m}}$$

$$M = 6 \text{ kg/m}(1.2 \text{ m}) + \frac{10 \text{ kg/m}^2 (1.2 \text{ m})^2}{2}$$

$$M = 14.4 \text{ kg}$$

(d)(ii) For a correct substitution of λ into an integral expression of rotational inertia **1 point**

Example Response

$$I = \int_0^{1.2 \text{ m}} (A + Bx)x^2 dx$$

For a correct integration **1 point**

Example Response

$$I = \left(\frac{Ax^3}{3} + \frac{Bx^4}{4} \right) \bigg|_0^{1.2 \text{ m}}$$

For a correct numeric answer with correct units **1 point**

Example Response

$$I = 8.64 \text{ kg} \cdot \text{m}^2$$

Example Solution

$$I = \int r^2 dm \quad dm = \lambda dr \text{ and } r = x$$

$$I = \int_0^{1.2 \text{ m}} \lambda x^2 dx$$

$$I = \int_0^{1.2 \text{ m}} (A + Bx)x^2 dx$$

$$I = \left(\frac{Ax^3}{3} + \frac{Bx^4}{4} \right) \bigg|_0^{1.2 \text{ m}}$$

$$I = \frac{(6.0 \text{ kg/m})(1.2 \text{ m})^3}{3} + \frac{(10.0 \text{ kg/m}^2)(1.2 \text{ m})^4}{4}$$

$$I = 8.64 \text{ kg} \cdot \text{m}^2$$

Total for part (d) 6 points

Total for question 3 15 points

Question 3: Free-Response Question

15 points


- (a) For drawing and appropriately labeling separate gravitational forces that are exerted on the disk and the lump of clay and exerted at the correct locations **1 point**

Scoring Note: Drawing a downward gravitational force exerted on the clay-disk system at the correct location can earn this point.

For drawing and appropriately labeling a leftward force exerted on the system at Point A **1 point**

For drawing and appropriately labeling a force directed up and right that is exerted on the system at the axle, and no extraneous forces are present **1 point**

Example Responses

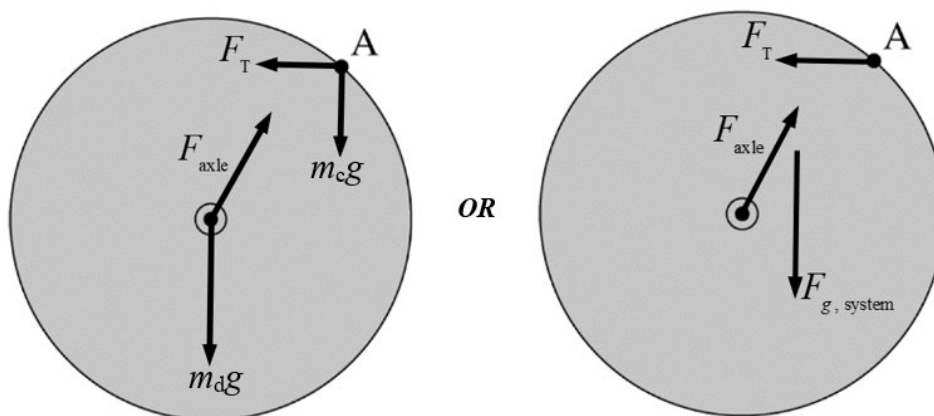

Scoring Note: Examples of appropriate labels for the gravitational force include F_G , F_g , F_{grav} , W , mg , Mg , “grav force,” “ F Earth on disk,” “ F on disk by Earth,” $F_{\text{Earth on Disk}}$, $F_{\text{E,Disk}}$, and $F_{\text{Disk,E}}$. The labels G or g are not appropriate labels for the gravitational force.

Scoring Note: Examples of appropriate labels for the normal force from the axle include F_N , F_{axle} , N , “normal force,” and “axle force.”

Scoring Note: Examples of appropriate labels for the tension force include F_t , F_T , T , F_{string} , and “Force from string.”

Total for part (a) 3 points

(b)	For a multi-step derivation that indicates the net torque is zero	1 point
	For indicating only the weight of the clay and the tension in the string exert torques on the system about the axle	1 point
Example Response		
$\tau_{\text{net}} = \tau_{\text{clay}} - \tau_{\text{string}}$		
	For a correct expression for the torque exerted on the system by the weight of the clay	1 point
Example Response		
$\tau_{\text{clay}} = Rm_{\text{c}}g \cos \theta$		
	For a correct expression for the torque exerted on the system by the tension in the string	1 point
Example Response		
$\tau_{\text{string}} = RF_{\text{T}} \sin \theta$		
Example Solution		
$\Sigma \tau = 0$		
$\tau_{\text{clay}} - \tau_{\text{string}} = 0$		
$F_{\text{g, clay}} R \cos \theta - RF_{\text{T}} \sin \theta = 0$		
$Rm_{\text{c}}g \cos \theta = RF_{\text{T}} \sin \theta$		
$F_{\text{T}} = \frac{Rm_{\text{c}}g \cos \theta}{R \sin \theta}$		
$F_{\text{T}} = m_{\text{c}}g \cot \theta$		
Scoring Note: A maximum of three points can be earned if the trigonometric functions (sin and cos) are reversed for both torque expressions.		
		Total for part (b) 4 points

(c) For indicating a direct relationship between the torque exerted by the clay and the tension in the string **1 point**

For correctly relating a greater torque exerted by the clay from at least **one** of the following: **1 point**

- An increase in the angle between the radial direction and the weight of the clay
- A greater perpendicular component of the weight of the clay
- A greater lever arm

Example Response

The torque caused by the weight of the clay at Point B is greater than when the clay is at Point A because the component of the weight that is perpendicular to the lever arm is larger. To maintain equilibrium, the net torque on the system is still zero, therefore the tension $F_{T, \text{new}}$ must be greater.

Total for part (c) 2 points

(d)(i) For using integration to calculate rotational inertia **1 point**

For **one** of the following: **1 point**

- Substituting $\rho(2\pi r)dr$ for dm
- Indicating the correct limits of integration

Example Response

$$I = \int_0^{0.3 \text{ m}} r^2 \rho(2\pi r) dr$$

For a correct answer of $I = 0.012 \text{ kg} \cdot \text{m}^2$, including units **1 point**

Example Response

$$I = 0.012 \text{ kg} \cdot \text{m}^2$$

Example Solution

$$I = \int r^2 dm \quad dm = \rho dA \quad \text{and} \quad dA = 2\pi r dr$$

$$I = \int_0^R r^2 \rho dA$$

$$I = \int_0^{0.3 \text{ m}} 2\pi \rho r^4 dr$$

$$I = \frac{2\pi \rho R^5}{5} \Big|_0^{0.3 \text{ m}}$$

$$I = \frac{2\pi(4.0 \text{ kg/m}^3)(0.3 \text{ m})^5}{5}$$

$$I = 0.012 \text{ kg} \cdot \text{m}^2$$

(d)(ii) For using the rotational form of Newton's second law **1 point**

For a correct expression for the net torque exerted on the clay-disk system **1 point**

Example Response

$$\tau_{\text{net}} = Rm_{\text{c}}g$$

For indicating that the rotational inertia of the clay-disk system is the sum of the rotational inertia of the disk and the rotational inertia of the lump of clay **1 point**

Example Response

$$I_{\text{system}} = I_{\text{disk}} + I_{\text{clay}}$$

Example Solution

$$\Sigma \tau = I\alpha$$

$$\alpha = \frac{\tau_{\text{net}}}{I}$$

$$\alpha = \frac{Rm_{\text{c}}g}{I_{\text{disk}} + I_{\text{clay}}}$$

$$\alpha = \frac{(0.3 \text{ m})(0.60 \text{ kg})(9.8 \text{ m/s}^2)}{\left((0.012 \text{ kg} \cdot \text{m}^2) + (0.60 \text{ kg})(0.3 \text{ m})^2\right)}$$

$$\alpha = 26.7 \text{ rad/s}^2$$

Total for part (d) 6 points


Total for question 3 15 points

Question 3: Free-Response Question

15 points

(a)	For correct location and label of the force exerted on the board by the spring	1 point
	For correct location and label of the force exerted on the board by gravity	1 point
	For correct location and label of the force exerted on the board by the pivot	1 point

Example Response

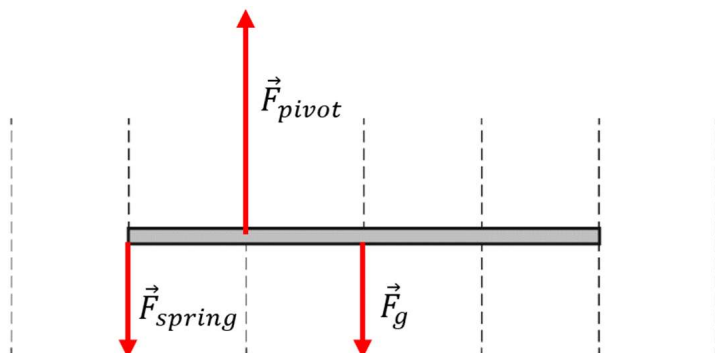

Scoring Notes:

- Examples of appropriate labels for the force due to gravity include: F_G , F_g , F_{grav} , W , mg , Mg , “grav force,” “F Earth on block,” “F on block by Earth,” $F_{\text{Earth on block}}$, $F_{\text{E,Block}}$. The labels G and g are not appropriate labels for the force due to gravity. F_n , F_N , N , “normal force,” “ground force,” or similar labels may be used for the normal force, which can be used instead of F_{pivot} . F_{spring} , F_S , “spring force,” or similar labels may be used for the force exerted by the spring.
- A response with extraneous forces or vectors can earn a maximum of two points.

Total for part (a) 3 points

(b)	For indicating that the sum of the torques equals zero	1 point
	$\Sigma \tau = 0$	

For substituting mg for the force of gravity and $k\Delta x$ for the spring force into a torque equation	1 point
--	---------

$$\frac{L}{4}k\Delta x - \frac{L}{4}mg = 0$$

For a correct expression for Δx	1 point
---	---------

$$\Delta x = \frac{mg}{k}$$

Example Response

$$\Sigma \tau = 0$$

$$F_{\text{spring}} d_{\text{spring}} - F_{\text{weight}} d_{\text{weight}} = 0$$

$$\frac{L}{4} k \Delta x - \frac{L}{4} mg = 0$$


$$\Delta x = \frac{mg}{k}$$

Scoring Note: This point can be earned regardless of whether a negative sign is present.

Total for part (b) 3 points

- (c)(i) For a sketch that begins at a maximum value and monotonically decreases to a minimum of zero at $t = t_1$ **1 point**

For a sketch that is concave down between $t = 0$ and $t = t_1$ **1 point**

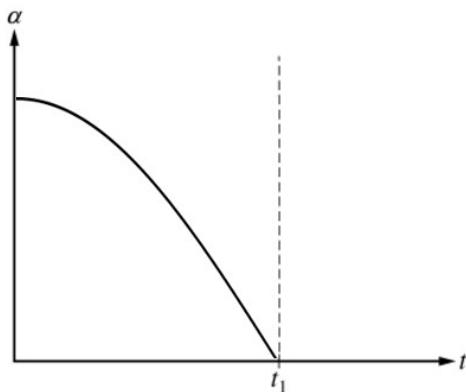Example Response

Scoring Note: Any part of the graph beyond t_1 is not considered in scoring.

- (c)(ii) For indicating that the torques are in opposite directions in the rotational form of Newton's second law **1 point**

$$\tau_{\text{spring}} - \tau_g = I\alpha$$

For including $\sin(90 - \theta_0)$, $\sin(90 + \theta_0)$, or $\cos \theta_0$ in an expression for the net torque exerted on the rod **1 point**

$$F_{\text{spring}} d_{\text{spring}} (\cos \theta) - F_g d_g (\cos \theta) = I_B \alpha_0$$

For substituting mg for the force due to gravity and substituting $k\Delta x_2$ for the spring force in an expression for the net torque exerted on the rod **1 point**

$$d_{\text{spring}} k \Delta x_2 (\cos \theta_0) - d_g mg (\cos \theta_0) = I_B \alpha_0$$

For substituting correct lever arms in an expression for the net torque exerted on the rod **1 point**

$$\frac{L}{4} (\cos \theta_0) k \Delta x_2 - \frac{L}{4} (\cos \theta_0) mg = I_B \alpha_0$$

Example Response

$$\tau_{\text{spring}} - \tau_g = I\alpha$$

$$F_{\text{spring}}d_{\text{spring}}(\cos\theta_0) - F_g d_g(\cos\theta_0) = I_B\alpha_0$$

$$l_{\text{spring}}(\cos\theta_0)k\Delta x_2 - l_g(\cos\theta_0)mg = I_B\alpha_0$$

$$\frac{L}{4}(\cos\theta_0)k\Delta x_2 - \frac{L}{4}(\cos\theta_0)mg = I_B\alpha_0$$

$$\alpha_0 = \frac{L}{4I_B}(k\Delta x_2 \cos\theta_0 - mg \cos\theta_0)$$

Total for part (c) 6 points

(d) For selecting “ $\alpha' < \alpha_0$ ” with an attempt at a relevant justification **1 point**

For indicating that the net torque does not change **1 point**

For indicating the rotational inertia increases **1 point**
Example Response

The net torque on the system is the same (the spring and the person exert the same force and the additional torques from the gravitational forces on the masses cancel) but the rotational inertia of the system is now larger. This means that the angular acceleration of the system is now smaller than it was before.

Total for part (d) 3 points

Total for question 3 15 points

Question 3: Free-Response Question**15 points**

- (a) For using integral calculus to calculate the rotational inertia of the rod **1 point**

$$I = \int r^2 dm$$

$$dm = \lambda dr = \gamma x^2 dx$$

- For correctly substituting γx^2 into the above equation **1 point**

$$I = \int x^2 (\gamma x^2 dx) = \int_{x=0}^{x=L} \gamma x^4 dx = \gamma \left[\frac{x^5}{5} \right]_{x=0}^{x=L} = \left(\frac{3M}{L^3} \right) \left(\frac{L^5}{5} - 0 \right) = \frac{3}{5} ML^2$$

Total for part (a) 2 points

- (b) For using integral calculus to determine the center of mass of the rod **1 point**

$$X_{CM} = \frac{\sum_i m_i x_i}{\sum_i m_i} = \frac{\int x dm}{\int dm}$$

- For correctly substituting γx^2 into the numerator of the above equation **1 point**

- For correctly substituting M into the denominator of the above equation OR evaluating the integral $\int dm$ to find the mass of the rod **1 point**

$$X_{CM} = \frac{\int x \lambda dx}{M} = \frac{\int x (\gamma x^2) dx}{M} = \frac{\int_{x=0}^{x=L} \gamma x^3 dx}{M} = \frac{\left[\frac{\gamma x^4}{4} \right]_{x=0}^{x=L}}{M} = \frac{\left(\frac{3M}{L^3} \right) \frac{L^4}{4}}{M} = \frac{3}{4} L$$

OR

$$X_{CM} = \frac{\int x \lambda dx}{\int \lambda dx} = \frac{\int_{x=0}^{x=L} x (\gamma x^2) dx}{\int_{x=0}^{x=L} \gamma x^2 dx} = \frac{\int_{x=0}^{x=L} \gamma x^3 dx}{\left[\frac{\gamma x^3}{3} \right]_{x=0}^{x=L}} = \frac{\left[\frac{\gamma x^4}{4} \right]_{x=0}^{x=L}}{\frac{\gamma L^3}{3}} = \frac{\frac{\gamma L^4}{4}}{\frac{\gamma L^3}{3}} = \frac{3}{4} L$$

Total for part (b) 3 points

(c)	For selecting “Greater than” with an attempted justification	1 point
	For a correct justification	1 point

Example responses for part (c)



Because more of the mass of the rod is at the end of the rod opposite point P, more mass is concentrated away from the axis of rotation; thus, the rotational inertia of the rod would be greater around point P than around its center of mass.

OR

According to the parallel axis theorem, $I = I_{cm} + md^2$, if the axis is at a position away from the center of mass, the rotational inertia is larger than if the axis were at the center of mass.

Total for part (c) 2 points

(d)	For a concave down curve that decreases to zero for the graph of τ as a function of t	1 point
	For a concave down curve that approaches horizontal for the graph of ω as a function of t	1 point
	For consistency between the two graphs	1 point

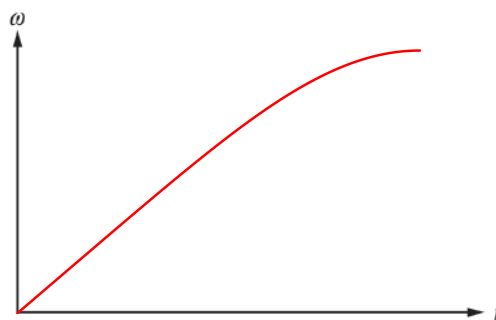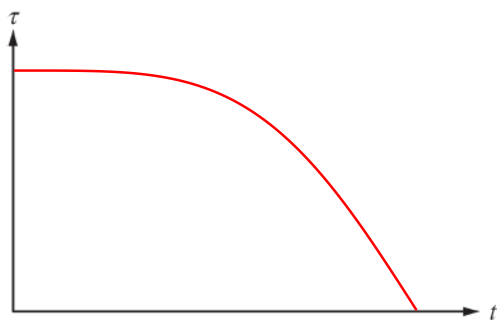

Total for part (d) 3 points

(e)	For selecting “Decreases” with an attempted justification	1 point
	For a correct justification	1 point

Example responses for part (e)

As the rod rotates downward, the angle θ in the torque equation $\tau = rF\sin\theta$ decreases. Thus, the torque on the rod decreases.

OR

As the rod rotates downward, the lever arm between point P and the rod's center of mass continues to decrease; thus, the torque on the rod decreases.

Total for part (e) 2 points

(f)	For using conservation of energy to calculate the speed of the rotating rod	1 point
	$U_i + K_i = U_f + K_f$ $U_i + 0 = 0 + K_f$ $U_i = K_f$	
	For correctly substituting into the above equation	1 point
	$mgh_i = \frac{1}{2}I\omega_f^2$	
	For correctly solving for the linear speed of point S	1 point
	$Mg\left(\frac{3}{4}L\right) = \frac{1}{2}\left(\frac{3}{5}ML^2\right)\left(\frac{v}{L}\right)^2$ $\frac{3}{4}MgL = \frac{3}{10}Mv^2 \therefore v = \sqrt{\frac{5}{2}gL} = \sqrt{\frac{5}{2}(9.8 \text{ m/s}^2)(1.0 \text{ m})} = 4.9 \text{ m/s}$	
		Total for part (f) 3 points
		Total for question 3 15 points

Question 2: Free-Response Question**15 points**

- (a) For integrating using the correct limits or constant of integration **1 point**

$$I = \int_{r=0}^{r=2L} \lambda r^2 dr = \lambda \left[\frac{r^3}{3} \right]_{r=0}^{r=2L} = \frac{\lambda}{3} ((2L)^3 - 0)$$

For correctly relating λ to M and L **1 point**

$$\lambda = \frac{m}{\ell} = \frac{M}{2L} \therefore I = \left(\frac{1}{3} \right) \left(\frac{M}{2L} \right) (8L^3) = \frac{4}{3} ML^2$$

Total for part (a) 2 points

- (b) i. For correctly substituting into an equation for the center of mass of an object in the horizontal direction **1 point**

$$X_{CM} = \frac{\sum m_i x_i}{\sum m_i} = \frac{\left[\left(\frac{M}{2} \right) \left(\frac{L}{2} \right) + \left(\frac{M}{2} \right) (L) \right]}{\left(\frac{M}{2} + \frac{M}{2} \right)} = \frac{\left(\frac{ML}{4} + \frac{ML}{2} \right)}{M} = \frac{3}{4} L$$

- ii. For correctly substituting into an equation for the center of mass of an object in the vertical direction **1 point**

$$Y_{CM} = \frac{\sum m_i y_i}{\sum m_i} = \frac{\left[\left(\frac{M}{2} \right) (L) + \left(\frac{M}{2} \right) \left(\frac{L}{2} \right) \right]}{\left(\frac{M}{2} + \frac{M}{2} \right)} = \frac{\left(\frac{ML}{2} + \frac{ML}{4} \right)}{M} = \frac{3}{4} L$$

Total for part (b) 2 points

- (c) For selecting “Less than” and attempting a relevant justification **1 point**


For a correct justification **1 point**

Example response for part (c)

Because object B has more of its mass closer to the pivot than object A, the rotational inertia of object B must be less than that of object A.

Total for part (c) 2 points

(d)	For an acceleration graph that is concave down and begins horizontally	1 point
	For an angular speed graph that is concave down and ends horizontally	1 point
	For consistency between the angular acceleration and angular speed graphs	1 point

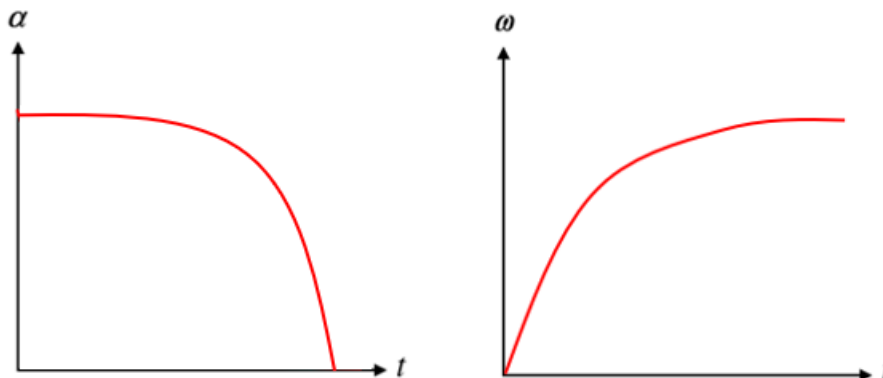Example responses for part (d)**Total for part (d) 3 points**

(e)	For selecting “Decreasing” and attempting a relevant justification	1 point
	For a justification that indicates the lever arm for the torque is decreasing	1 point

Example response for part (e)

Because the horizontal position of the center of mass for the object is moving closer to the pivot, the lever arm for the force of gravity is decreasing so the angular acceleration decreases.

Total for part (e) 2 points

(f)	For using conservation of energy	1 point
	$U_{g1} = K_2$	
	For correctly relating the change in rotational kinetic energy to the change in gravitational potential energy	1 point
	$mgh = \frac{1}{2}I\omega^2$	
	For correctly substituting for h into the equation above	1 point
	$mg\left(\frac{L}{2}\right) = \frac{1}{2}I\omega^2$	
	For an expression for ω that uses only the allowed symbols and is algebraically consistent with the previous steps	1 point
	$\omega = \sqrt{\frac{2mgh}{I}} = \sqrt{\frac{2Mg(L/2)}{I_B}}$	
	$\omega = \sqrt{\frac{MgL}{I_B}}$	
Total for part (f) 4 points		

Total for question 2 15 points

2019**AP[®]** **CollegeBoard**

AP[®] Physics C: Mechanics

Scoring Guidelines Set 1


2019 SCORING GUIDELINES**General Notes About 2019 AP Physics Scoring Guidelines**

1. The solutions contain the most common method of solving the free-response questions and the allocation of points for this solution. Some also contain a common alternate solution. Other methods of solution also receive appropriate credit for correct work.
2. The requirements that have been established for the paragraph-length response in Physics 1 and Physics 2 can be found on AP Central at <https://secure-media.collegeboard.org/digitalServices/pdf/ap/paragraph-length-response.pdf>.
3. Generally, double penalty for errors is avoided. For example, if an incorrect answer to part (a) is correctly substituted into an otherwise correct solution to part (b), full credit will usually be awarded. One exception to this may be cases when the numerical answer to a later part should be easily recognized as wrong, e.g., a speed faster than the speed of light in vacuum.
4. Implicit statements of concepts normally receive credit. For example, if use of the equation expressing a particular concept is worth 1 point, and a student's solution embeds the application of that equation to the problem in other work, the point is still awarded. However, when students are asked to derive an expression, it is normally expected that they will begin by writing one or more fundamental equations, such as those given on the exam equation sheet. For a description of the use of such terms as "derive" and "calculate" on the exams, and what is expected for each, see "The Free-Response Sections — Student Presentation" in the *AP Physics; Physics C: Mechanics, Physics C: Electricity and Magnetism Course Description* or "Terms Defined" in the *AP Physics 1: Algebra-Based Course and Exam Description* and the *AP Physics 2: Algebra-Based Course and Exam Description*.
5. The scoring guidelines typically show numerical results using the value $g = 9.8 \text{ m/s}^2$, but the use of 10 m/s^2 is of course also acceptable. Solutions usually show numerical answers using both values when they are significantly different.
6. Strict rules regarding significant digits are usually not applied to numerical answers. However, in some cases answers containing too many digits may be penalized. In general, two to four significant digits are acceptable. Numerical answers that differ from the published answer due to differences in rounding throughout the question typically receive full credit. Exceptions to these guidelines usually occur when rounding makes a difference in obtaining a reasonable answer. For example, suppose a solution requires subtracting two numbers that should have five significant figures and that differ starting with the fourth digit (e.g., 20.295 and 20.278). Rounding to three digits will lose the accuracy required to determine the difference in the numbers, and some credit may be lost.


2019 SCORING GUIDELINES

Question 1

15 points



In an experiment, students used video analysis to track the motion of an object falling vertically through a fluid in a glass cylinder. The object of $m = 12\text{ g}$ is released from rest at the top of the column of fluid, as shown above. The data for the speed v of the falling object as a function of time t are graphed on the grid below. The dashed curve represents the best fit chosen by the students for these data.

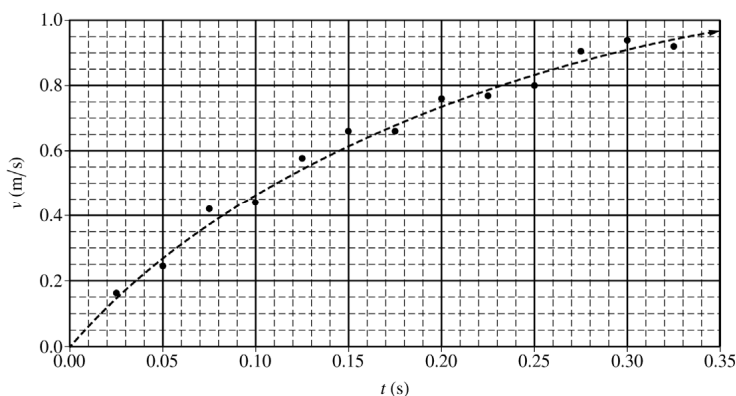

(a)

- i. LO CHA-1.C, SP 7.A
1 point

Does the speed of the object increase, decrease, or remain the same?

☒ Increase ☐ Decrease ☐ Remain the same

For selecting "Increase"	1 point
--------------------------	---------

- ii. LO CHA-1.C, SP 4.D
2 points


In a brief statement, describe the direction of the object's acceleration and how the magnitude of this acceleration changed as the object fell.

For a description that includes the direction of the acceleration as being "downwards"	1 point
For a description that includes the decrease in the magnitude of the acceleration	1 point
Example: Because the object is moving downwards and speeding up, the acceleration must be downwards. Because the slope of the graph of speed as a function of time is decreasing, the magnitude of the acceleration must be decreasing.	

2019 SCORING GUIDELINES

Question 1 (continued)

(a) continued

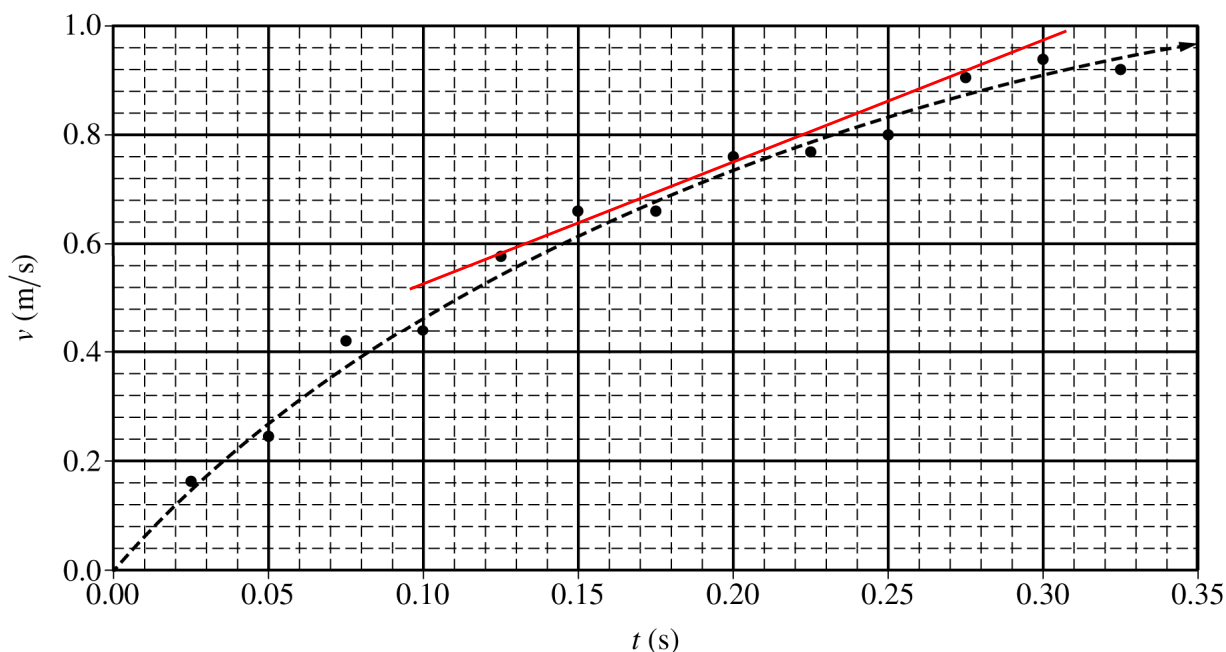

- iii. LO CHA-1.C, SP 4.D, 6.C
2 points

Using the graph, calculate an approximate value for the magnitude of the acceleration of the object at $t = 0.20$ s.

For calculating the slope of a trend line at $t = 0.20$ s	1 point
$\text{slope} = a = \frac{\Delta v}{\Delta t} = \frac{(0.8 - 0.6) \text{ m/s}}{(0.226 - 0.136) \text{ s}}$	
For a correct answer using points from a tangent line	1 point
$a = 2.22 \text{ m/s}^2$	

The students use the equation $v = A(1 - e^{-Bt})$ to model the speed of the falling object and find the best-fit coefficients to be $A = 1.18 \text{ m/s}$ and $B = 5 \text{ s}^{-1}$.

2019 SCORING GUIDELINES

Question 1 (continued)

(b) Use the above equation to:

- i. LO CHA-1.B, SP 6.B, 6.C
3 points

Derive an expression for the magnitude of the vertical displacement $y(t)$ of the falling object as a function of time t .

For indicating that the vertical displacement is the integration of the velocity	1 point
$\Delta y = \int v dt = \int A(1 - e^{-Bt}) dt$	
For the equation for speed using appropriate limits or constant of integration	1 point
$\Delta y = \int_{t'=0}^{t'=t} A(1 - e^{-Bt'}) dt' = A \left[t' - \frac{1}{-B} e^{-Bt'} \right]_{t'=0}^{t'=t} = A \left[\left(t + \frac{1}{B} e^{-Bt} \right) - \left(0 + \frac{1}{B} e^0 \right) \right]$	
For a correct answer	1 point
$\Delta y = A \left(t + \frac{1}{B} (e^{-Bt} - 1) \right) = (1.18) \left(t + \frac{1}{5} (e^{-5t} - 1) \right)$	
<u>Note:</u> Credit given for using A and B or plugging in the given values	

- ii. LO INT-1.C.d, SP 6.B, 6.C
3 points

Derive an expression for the magnitude of the net force $F(t)$ exerted on the object as it falls through the fluid as a function of time t .

For attempting the derivative of the equation for speed	1 point
$a = \frac{dv}{dt} = \frac{d}{dt} [A(1 - e^{-Bt})]$	
For a correct equation for the acceleration	1 point
$a = ABe^{-Bt}$	
For multiplying the equation above by the mass of the object	1 point
$F = ma = m(ABe^{-Bt}) = mABe^{-Bt}$	
$F = (.012)(1.18)(5)e^{-5t} = 0.071e^{-5t}$	
<u>Note:</u> Credit given for using A , B , and m or plugging in the given values	

2019 SCORING GUIDELINES**Question 1 (continued)**

(c)

The students repeat the experiment with a taller glass cylinder that is filled with the same fluid. The cylinder is tall enough so that the object reaches a constant speed.

i. LO INT-1.I, SP 7.A, 7.C

2 points

Determine the constant speed of the object.

Justify your answer.

For stating the constant speed is $v = A$	1 point
For indicating that the constant speed can be determined by setting the time equal to infinity	1 point
Example: After a long time, the falling object will reach a terminal constant speed in the fluid. This can be determined by setting the time t in the equation for speed equal to infinity. By doing this, the constant speed is determined to be $v = A$.	
<u>Note:</u> Credit given for solving mathematically	

ii. LO INT-1.H.b, SP 7.A, 7.C

2 points

Determine the force exerted by the fluid on the object at this time. Justify your answer.

For indicating that the net force is equal to zero when the object moves with constant speed	1 point
For indicating the resistive force is equal to the weight of the object at this time	1 point
Example: When the falling object reaches a constant speed in the fluid, the net force must be zero. Because the only vertical forces acting on the object are Earth's gravitational pull and the resistive force of the fluid, these two forces must be equal. So, the resistive force must be equal to the weight of the object or 0.12 N.	
<u>Note:</u> Credit given for solving mathematically	

2019 SCORING GUIDELINES**Question 1 (continued)****Learning Objectives**

CHA-1.B: Determine functions of position, velocity, and acceleration that are consistent with each other, for the motion of an object with a nonuniform acceleration.

CHA-1.C: Describe the motion of an object in terms of the consistency that exists between position and time, velocity and time, and acceleration and time.

INT-1.C.d: Derive an expression for the net force on an object in translational motion.

INT-1.H.b: Describe the acceleration, velocity, or position in relation to time for an object subject to a resistive force (with different initial conditions, i.e., falling from rest or projected vertically).

INT-1.I: Calculate the terminal velocity of an object moving vertically under the influence of a resistive force of a given relationship.

Science Practices

4.D: Select relevant features of a graph to describe a physical situation or solve problems.

6.B: Apply an appropriate law, definition, or mathematical relationship to solve a problem.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.


7.A: Make a scientific claim.

7.C: Support a claim with evidence from physical representations.

2019 SCORING GUIDELINES

Question 2

15 points

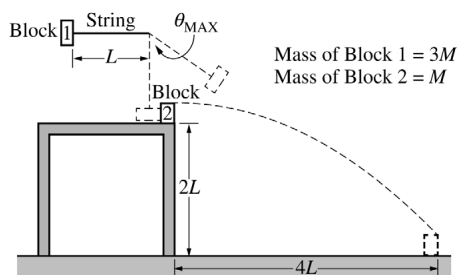

Note: Figure not drawn to scale.

A pendulum of length L consists of block 1 of mass $3M$ attached to the end of a string. Block 1 is released from rest with the string horizontal, as shown above. At the bottom of its swing, block 1 collides with block 2 of mass M , which is initially at rest at the edge of a table of height $2L$. Block 1 never touches the table. As a result of the collision, block 2 is launched horizontally from the table, landing on the floor a distance $4L$ from the base of the table. After the collision, block 1 continues forward and swings up. At its highest point, the string makes an angle θ_{MAX} to the vertical. Air resistance and friction are negligible. Express all algebraic answers in terms of M , L , and physical constants, as appropriate.


- (a) LO CON-2.C.a, SP 5.E
1 point

Determine the speed of block 1 at the bottom of its swing just before it makes contact with block 2.

For correctly calculating the speed of block 1		1 point
$U_{g1} = K_2 \therefore mgh = \frac{1}{2}mv^2 \therefore gL = \frac{1}{2}v^2$		
$v = \sqrt{2gL}$		
Note: Credit is earned even if no work is shown.		

- (b) LO INT-2.B.b, SP 3.D
2 points

On the dot below, which represents block 1, draw and label the forces (not components) that act on block 1 just before it makes contact with block 2. Each force must be represented by a distinct arrow starting on, and pointing away from, the dot. Forces with greater magnitude should be represented by longer vectors.



For correctly drawing and labeling the weight of the block and the tension in the string		1 point
For drawing the tension longer than the weight of the block		1 point
Note: A maximum of one point can be earned if there are any extraneous vectors.		

2019 SCORING GUIDELINES

Question 2 (continued)

- (c) LO INT-2.B.b, SP 5.A, 5.E
2 points

Derive an expression for the tension F_T in the string when the string is vertical just before block 1 makes contact with block 2. If you need to draw anything other than what you have shown in part (b) to assist in your solution, use the space below. Do NOT add anything to the figure in part (b).

For using an appropriate equation to calculate the tension in the string		1 point
$F_T = mg + ma_C = mg + \frac{mv^2}{r} = 3Mg + \frac{(3M)(\sqrt{2gL})^2}{L}$		
For a correct answer		1 point
$F_T = 9Mg$		

For parts (d)–(g), the value for the length of the pendulum is $L = 75$ cm.

- (d) LO CHA-2.C, SP 6.A, 6.C
2 points

Calculate the time between the instant block 2 leaves the table and the instant it first contacts the floor.

For using a correct kinematic equation to calculate the time		1 point
$\Delta y = v_1 t + \frac{1}{2}at^2 = \frac{1}{2}at^2 \therefore t = \sqrt{\frac{2\Delta y}{a}} = \sqrt{\frac{2(2L)}{g}} = \sqrt{\frac{(4)(0.75 \text{ m})}{(9.8 \text{ m/s}^2)}}$		
For a correct answer		1 point
$t = 0.55 \text{ s}$		

- (e) LO CHA-2.C, SP 6.A, 6.C
2 points

Calculate the speed of block 2 as it leaves the table.

For using a correct kinematic equation to calculate the speed		1 point
$\Delta x = vt \therefore v = \frac{\Delta x}{t} = \frac{4L}{t}$		
For substituting the time from part (d) into equation above		1 point
$v = \frac{(4)(0.75 \text{ m})}{(0.55 \text{ s})} = 5.45 \text{ m/s}$		

2019 SCORING GUIDELINES

Question 2 (continued)

- (f) LO CON-4.E.a, SP 6.B, 6.C
3 points

Calculate the speed of block 1 just after it collides with block 2.

For indicating the use of the correct conservation of momentum to calculate the speed	1 point
$p_i = p_f \therefore m_1 v_{1i} + m_2 v_{2i} = m_1 v_{1f} + m_2 v_{2f}$	
For correctly substituting the mass into equation above	1 point
$(3M)v_{1i} + 0 = (3M)v_{1f} + (M)v_{2f}$	
For substituting the speeds from parts (a) and (e) into equation above	1 point
$v_{1f} = \frac{(3M)v_{1i} - (M)v_{2f}}{(3M)} = \frac{(3M)\sqrt{2gL} - (M)v_{2f}}{(3M)}$	
$v_{1f} = \frac{(3)\sqrt{(2)(9.8 \text{ m/s}^2)(0.75 \text{ m})} - (1)(5.45 \text{ m/s})}{(3)} = 2.02 \text{ m/s}$	
$(v_{1f} = 2.06 \text{ m/s when using } g = 10 \text{ m/s}^2)$	

- (g) LO CON-2.C.a, SP 6.B, 6.C
3 points

Calculate the angle θ_{MAX} that the string makes with the vertical, as shown in the original figure, when block 1 is at its highest point after the collision.

For using conservation of energy to calculate the angle	1 point
$K_1 = U_{g2}$	
$\frac{1}{2}mv^2 = mgh$	
For correctly substituting $h = L(1 - \cos\theta)$ into the equation above	1 point
For correctly substituting the speed from part (f) into the equation above	1 point
$\frac{1}{2}mv^2 = mgL(1 - \cos\theta) \therefore \frac{v^2}{2gL} = 1 - \cos\theta$	
$\theta = \cos^{-1}\left(1 - \frac{v^2}{2gL}\right) = \cos^{-1}\left(1 - \frac{(2.02 \text{ m/s})^2}{(2)(9.8 \text{ m/s}^2)(0.75 \text{ m})}\right) = 43.5^\circ$	
$(\theta = 44.1^\circ \text{ when using } g = 10 \text{ m/s}^2)$	

2019 SCORING GUIDELINES**Question 2 (continued)****Learning Objectives**

CHA-2.C: Calculate kinematic quantities of an object in projectile motion, such as displacement, velocity, speed, acceleration, and time, given initial conditions of various launch angles, including a horizontal launch at some point in its trajectory.

INT-2.B.b: Describe forces that are exerted on objects undergoing horizontal circular motion, vertical circular motion, or horizontal circular motion on a banked curve.

CON-2.C.a: Calculate unknown quantities (e.g., speed or positions of an object) that are in a conservative system of connected objects, such as the masses in an Atwood machine, masses connected with pulley/string combinations, or the masses in a modified Atwood machine.

CON-4.E.a: Calculate the changes in speeds, changes in velocities, changes in kinetic energy, or changes in momenta of objects in all types of collisions (elastic or inelastic) in one dimension, given the initial conditions of the objects.

Science Practices

3.D: Create appropriate diagrams to represent physical situations.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

6.A: Extract quantities from narratives or mathematical relationships to solve problems.


6.B: Apply an appropriate law, definition, or mathematical relationship to solve a problem.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

2019 SCORING GUIDELINES

Question 3

15 points

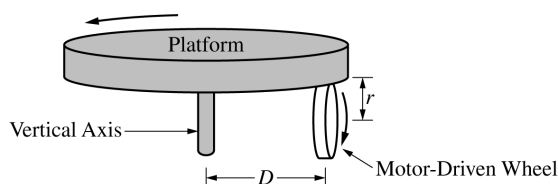

A horizontal circular platform with rotational inertia I_P rotates freely without friction on a vertical axis. A small motor-driven wheel that is used to rotate the platform is mounted under the platform and touches it. The wheel has radius r and touches the platform a distance D from the vertical axis of the platform, as shown above. The platform starts at rest, and the wheel exerts a constant horizontal force of magnitude F tangent to the wheel until the platform reaches an angular speed ω_p after time Δt . During time Δt , the wheel stays in contact with the platform without slipping.

- (a) LO INT-7.A.b, CHA-4.A.b, SP 5.A, 5.E
2 points

Derive an expression for the angular speed ω_p of the platform. Express your answer in terms of I_P , r , D , F , Δt , and physical constants, as appropriate.

For correctly substituting into the rotational form of Newton's second law			1 point
$\tau = I\alpha \therefore FD = I_P\alpha$			
$\alpha = \frac{FD}{I_P}$			
For correctly substituting into a rotational kinematic equation to calculate the angular speed			1 point
$\omega_2 = \omega_1 + \alpha\Delta t = 0 + \left(\frac{FD}{I_P}\right)\Delta t$			
$\omega_p = \frac{FD\Delta t}{I_P}$			

- (b) LO INT-7.D.a, SP 5.A, 5.E
2 points

Determine an expression for the kinetic energy of the platform at the moment it reaches angular speed ω_p . Express your answer in terms of I_P , r , D , F , Δt , and physical constants, as appropriate.

For using the equation for rotational kinetic energy			1 point
$K = \frac{1}{2}I\omega_p^2 = \left(\frac{1}{2}\right)(I)\left(\frac{FD\Delta t}{I}\right)^2$			
For an answer consistent with part (a)			1 point
$K = \frac{(FD\Delta t)^2}{2I}$			


2019 SCORING GUIDELINES

Question 3 (continued)

- (c) LO INT-7.C, SP 5.A, 5.E
2 points

Derive an expression for the angular speed of the wheel ω_W when the platform has reached angular speed ω_P . Express your answer in terms of D , r , ω_P , and physical constants, as appropriate.

For indicating that the linear speed of the platform is equal to the linear speed of the wheel		1 point
$v_P = v_W$ OR $(r\omega)_P = (r\omega)_W$		
For correctly relating the linear speeds to the angular speeds in the above equation		1 point
$D\omega_P = r\omega_W$		
$\omega_W = \frac{D\omega_P}{r}$		



When the platform is spinning at angular speed ω_P , the motor-driven wheel is removed. A student holds a disk directly above and concentric with the platform, as shown above. The disk has the same rotational inertia I_P as the platform. The student releases the disk from rest, and the disk falls onto the platform. After a short time, the disk and platform are observed to be rotating together at angular speed ω_f .

- (d) LO CON-5.D.c, SP 5.A, 5.E
2 points

Derive an expression for ω_f . Express your answer in terms of ω_P , I_P , and physical constants, as appropriate.

For using an expression for the conservation of angular momentum		1 point
$L_1 = L_2 \therefore I_1\omega_1 = I_2\omega_2$		
For correctly substituting into the above equation		1 point
$I\omega_P = (2I)\omega_f$		
$\omega_f = \frac{1}{2}\omega_P$		


2019 SCORING GUIDELINES

Question 3 (continued)

A student now uses the rotating platform ($I_P = 3.1 \text{ kg} \cdot \text{m}^2$) to determine the rotational inertia I_U of an unknown object about a vertical axis that passes through the object's center of mass. The platform is rotating at an initial angular speed ω_i when the unknown object is dropped with its center of mass directly above the center of the platform. The platform and object are observed to be rotating together at angular speed ω_f . Trials are repeated for different values of ω_i . A graph of ω_f as a function of ω_i is shown on the axes below.

- (e)
- i. LO CON-5.D.c, SP 4.C
1 points

On the graph on the previous page, draw a best-fit line for the data.

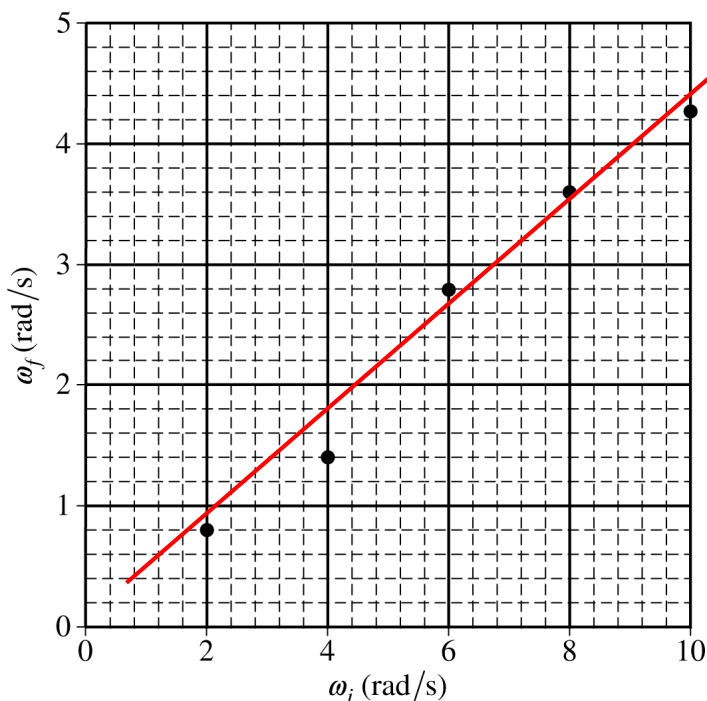

For an appropriate best-fit line for the graph above	1 point
--	---------

2019 SCORING GUIDELINES

Question 3 (continued)

(e) continued

- ii. LO CON-5.D.c, SP 4.D, 6.C
2 points

Using the straight line, calculate the rotational inertia of the unknown object I_U about a vertical axis passing through its center of mass.

For using conservation of angular momentum to derive an expression that includes I_U	1 point
$L_i = L_f \therefore I_P \omega_i = (I_P + I_U) \omega_f$	
$I_U = I_P \left(\frac{\omega_i}{\omega_f} \right) - I_P$	
For substituting points from the best-fit line into the expression above	1 point
$I_U = (3.1 \text{ kg}\cdot\text{m}^2) \left(\frac{(4.0 - 1.0) \text{ rad/s}}{(9.3 - 2.4) \text{ rad/s}} \right) - (3.1 \text{ kg}\cdot\text{m}^2) = 4.1 \text{ kg}\cdot\text{m}^2$	
<u>Note:</u> The point (0, 0) can be used implicitly if the best-fit line goes through the origin.	

- (f) LO CON-5.D.c, SP 7.A, 7.C
2 points

The kinetic energy of the spinning platform before the object is dropped on it is K_i . The total kinetic energy of the platform-object system when it reaches angular speed ω_f is K_f . Which of the following expressions is true?

___ $K_f < K_i$ ___ $K_f = K_i$ ___ $K_f > K_i$

Justify your answer.

For selecting $K_f < K_i$ with an attempt at a relevant justification	1 point
For a correct justification	1 point
Example: Because the two disks will be rotating with the same final angular speed, this is an inelastic collision, and kinetic energy will be lost during the collision.	

2019 SCORING GUIDELINES

Question 3 (continued)

- (g) LO INT-6.E, SP 7.A, 7.C
2 points

One of the students observes that the center of mass of the object is not actually aligned with the axis of the platform. Is the experimental value of I_U obtained in part (e) greater than, less than, or equal to the actual value of the rotational inertia of the unknown object about a vertical axis that passes through its center of mass?

____ Greater than ____ Less than ____ Equal to

Justify your answer.

For selecting “Greater than” with an attempt at a relevant justification		1 point
For a correct justification		1 point
Example: Because the center of mass of the object is off the axis of the platform, the parallel axis theorem would be used to calculate the total rotational inertia of the platform-object system. Using $I = I_{CM} + Mh^2$, the experimental value will be increased by Mh^2 .		

Learning Objectives

INT-6.E: Derive the moments of inertia of an extended rigid body for different rotational axes (parallel to an axis that goes through the object’s center of mass) if the moment of inertia is known about an axis through the object’s center of mass.

CHA-4.A.b: Calculate unknown quantities such as angular positions, displacement, angular speeds, or angular acceleration of a rigid body in uniformly accelerated motion, given initial conditions.

INT-7.A.b: Calculate unknown quantities such as net torque, angular acceleration, or moment of inertia for a rigid body undergoing rotational acceleration.

INT-7.C: Derive expressions for physical systems such as Atwood Machines, pulleys with rotational inertia, or strings connecting discs or strings connecting multiple pulleys that relate linear or translational motion characteristics to the angular motion characteristics of rigid bodies in the system that are: **(a)** rolling (or rotating on a fixed axis) without slipping. **(b)** rotating and sliding simultaneously.

INT-7.D.a: Calculate the rotational kinetic energy of a rotating rigid body.

CON-5.D.c: Calculate the changes of angular momentum of each disc in a rotating system of two rotating discs that collide with each other inelastically about a common rotational axis.

Science Practices

4.C: Linearize data and/or determine a best-fit line or curve.

4.D: Select relevant features of a graph to describe a physical situation or solve problems.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

7.A: Make a scientific claim.

7.C: Support a claim with evidence from physical representations.

2019**AP[®]** **CollegeBoard**

AP[®] Physics C: Mechanics

Scoring Guidelines Set 2

2019 SCORING GUIDELINES**General Notes About 2019 AP Physics Scoring Guidelines**

1. The solutions contain the most common method of solving the free-response questions and the allocation of points for this solution. Some also contain a common alternate solution. Other methods of solution also receive appropriate credit for correct work.
2. The requirements that have been established for the paragraph-length response in Physics 1 and Physics 2 can be found on AP Central at <https://secure-media.collegeboard.org/digitalServices/pdf/ap/paragraph-length-response.pdf>.
3. Generally, double penalty for errors is avoided. For example, if an incorrect answer to part (a) is correctly substituted into an otherwise correct solution to part (b), full credit will usually be awarded. One exception to this may be cases when the numerical answer to a later part should be easily recognized as wrong, e.g., a speed faster than the speed of light in vacuum.
4. Implicit statements of concepts normally receive credit. For example, if use of the equation expressing a particular concept is worth 1 point, and a student's solution embeds the application of that equation to the problem in other work, the point is still awarded. However, when students are asked to derive an expression, it is normally expected that they will begin by writing one or more fundamental equations, such as those given on the exam equation sheet. For a description of the use of such terms as "derive" and "calculate" on the exams, and what is expected for each, see "The Free-Response Sections — Student Presentation" in the *AP Physics; Physics C: Mechanics, Physics C: Electricity and Magnetism Course Description* or "Terms Defined" in the *AP Physics 1: Algebra-Based Course and Exam Description* and the *AP Physics 2: Algebra-Based Course and Exam Description*.
5. The scoring guidelines typically show numerical results using the value $g = 9.8 \text{ m/s}^2$, but the use of 10 m/s^2 is of course also acceptable. Solutions usually show numerical answers using both values when they are significantly different.
6. Strict rules regarding significant digits are usually not applied to numerical answers. However, in some cases answers containing too many digits may be penalized. In general, two to four significant digits are acceptable. Numerical answers that differ from the published answer due to differences in rounding throughout the question typically receive full credit. Exceptions to these guidelines usually occur when rounding makes a difference in obtaining a reasonable answer. For example, suppose a solution requires subtracting two numbers that should have five significant figures and that differ starting with the fourth digit (e.g., 20.295 and 20.278). Rounding to three digits will lose the accuracy required to determine the difference in the numbers, and some credit may be lost.

2019 SCORING GUIDELINES

Question 1

15 points


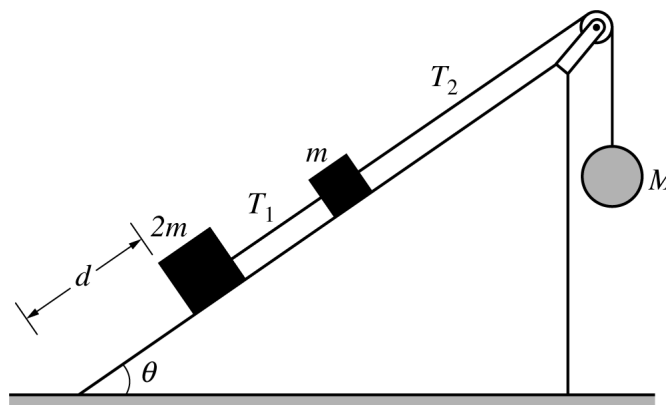


Figure 1

Blocks of mass m and $2m$ are connected by a light string and placed on a frictionless inclined plane that makes an angle θ with the horizontal, as shown in Figure 1 above. Another light string connecting the block of mass m to a hanging sphere of mass M passes over a pulley of negligible mass and negligible friction. The entire system is initially at rest and in equilibrium.

- (a) LO INT-1.A, SP 3.D
3 points

On the dots below that represent the block of mass m and the sphere of mass M , draw and label the forces (not components) that act on each of the objects shown. Each force must be represented by a distinct arrow starting on and pointing away from the dot.

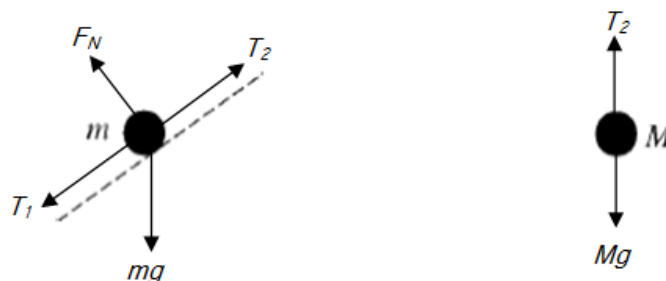

For correctly drawing and labeling vectors representing the normal force and the gravitational force on the block of mass m	1 point
For correctly drawing and labeling vectors representing the forces of tension on the block of mass m	1 point
For correctly drawing and labeling vectors representing the tension force and the gravitational force on the sphere of mass M	1 point
<u>Note:</u> A maximum of two points can be earned if there are any extraneous vectors.	

2019 SCORING GUIDELINES

Question 1 (continued)

(b)

Derive expressions for the magnitude of each of the following. If you need to draw anything other than what you have shown in part (a) to assist in your solution, use the space below. Do NOT add anything to the figures in part (a).

- i. LO INT-1.C.e, SP 1.D, 5.E
2 points

The force T_2 exerted on the block of mass m by the string. Express your answers in terms of m , θ , and physical constants, as appropriate.

For using an attempt at a correct statement of Newton's second law for the two blocks	1 point
$F_{\text{net}} = (m + 2m)a = 0 \therefore T_2 - (m + 2m)g \sin \theta = 0$	
For a correct answer with supporting work	1 point
$T_2 = 3mg \sin \theta$	

- ii. LO INT-1.D, SP 5.E
1 point

The mass M for which the system can remain in equilibrium. Express your answers in terms of m , θ , and physical constants, as appropriate.

For using a correct statement of Newton's second law for the whole system to derive an expression for M	1 point
$F_{\text{net}} = m_{\text{tot}}a \therefore Mg - 2mg \sin \theta - mg \sin \theta = 0$	
$M = 3m \sin \theta$	
<i>Alternate Solution</i>	<i>Alternate Points</i>
For a correct statement of Newton's second law for the sphere and an answer consistent with part (b)(i)	1 point
$T_2 - Mg = 0 \therefore Mg = T_2 \therefore M = T_2/g$	
$M = 3m \sin \theta$	

2019 SCORING GUIDELINES

Question 1 (continued)

(c)

Now suppose that mass M is large enough to descend and that the sphere reaches the floor before the blocks reach the pulley. Answer the following for the moment immediately after the sphere reaches the floor.

i. LO INT-1.D, SP 7.A

1 point

Does the tension T_1 increase, decrease to a nonzero value, decrease to zero, or stay the same?

☐ Increase ☐ Decrease to a nonzero value

☐ Decrease to zero ☐ Stay the same

For correctly stating that the magnitude of T_1 drops to zero	1 point
---	---------

ii. LO INT-1.D, SP 7.A

1 point

Is the velocity of the block of mass m up the ramp, down the ramp, or zero?

☐ Up the ramp ☐ Down the ramp ☐ Zero

For selecting “Up the ramp”	1 point
-----------------------------	---------

iii. LO INT-1.D, SP 7.A

1 point

Is the acceleration of the block of mass m up the ramp, down the ramp, or zero?

☐ Up the ramp ☐ Down the ramp ☐ Zero

For selecting “Down the ramp”	1 point
-------------------------------	---------

(d) LO INT-1.D, SP 5.A, 5.E

3 points

Consider the initial setup in Figure 1. Now suppose the surface of the incline is rough and the coefficient of static friction between the blocks and the inclined plane is μ_s . Derive an expression for the minimum possible value of M that will keep the blocks from moving down the incline. Express your answer in terms of m , μ_s , θ , and fundamental constants, as appropriate.

For an attempt at a correct statement of Newton’s second law for the system	1 point
$F_{\text{net}} = m_{\text{tot}} a \therefore 2mg \sin \theta - f_{s2} + mg \sin \theta - f_{s1} - Mg = 0$	
For attempting to substitute in for the force of friction	1 point
$3mg \sin \theta - \mu_s F_{N2} - \mu_s F_{N1} = Mg$	
$3mg \sin \theta - \mu_s (2mg \cos \theta) - \mu_s (mg \cos \theta) = Mg$	
For a correct answer with supporting work	1 point
$M = 3m(\sin \theta - \mu_s \cos \theta)$	

2019 SCORING GUIDELINES

Question 1 (continued)

- (e) LO INT-1.D, CHA-1.A.b, SP 5.A, 5.E
3 points

The string connecting block m and the sphere of mass M then breaks, and the blocks begin to move from rest down the incline. The lower block starts a distance d from the bottom of the incline, as shown in Figure 1. The coefficient of kinetic friction between the blocks and the inclined plane is μ_k . Derive an expression for the speed of the blocks when the lower block reaches the bottom of the incline. Express your answer in terms of m , d , μ_k , θ , and fundamental constants, as appropriate.

For an attempt at a correct statement of Newton's second law for the two blocks		1 point
$F_{\text{net}} = m_{\text{tot}} a \therefore 2mg \sin \theta - f_{k2} + mg \sin \theta - f_{k1} = 3ma$		
Solve for the acceleration		
$3mg \sin \theta - \mu_k (2mg \cos \theta) - \mu_k mg \cos \theta = 3ma$		
$a = g(\sin \theta - \mu_k \cos \theta)$		
For using a correct kinematics equation to solve for the final velocity		1 point
$v_2^2 = v_1^2 + 2ad$		
$v_2^2 = 0^2 + 2g(\sin \theta - \mu_k \cos \theta)d$		
For a correct answer with supporting work		1 point
$v = \sqrt{2gd(\sin \theta - \mu_k \cos \theta)}$		
<i>Alternate Solution</i>	<i>Alternate Points</i>	
For an attempt at a correct statement of conservation of energy for the two blocks		1 point
$U_1 + K_1 = U_2 + K_2 + E_{\text{lost}}$		
$2mgh + mgh + 0 = 0 + \frac{1}{2}(2m)v^2 + \frac{1}{2}mv^2 + fd$		
For correct substitutions of height and friction		1 point
$3mgd \sin \theta = \frac{1}{2}(3m)v^2 + \mu_k (2mg \cos \theta)d + \mu_k (mg \cos \theta)d$		
$3gd \sin \theta - 3\mu_k gd \cos \theta = \frac{3}{2}v^2$		
For a correct answer with supporting work		1 point
$v = \sqrt{2gd(\sin \theta - \mu_k \cos \theta)}$		

2019 SCORING GUIDELINES**Question 1 (continued)****Learning Objectives**

CHA-1.A.b: Calculate unknown variables of motion such as acceleration, velocity, or positions for an object undergoing uniformly accelerated motion in one dimension.

INT-1.A: Describe an object (either in a state of equilibrium or acceleration) in different types of physical situations such as inclines, falling through air resistance, Atwood machines, or circular tracks).

INT-1.C.e: Derive a complete Newton's second law statement (in the appropriate direction) for an object in various physical dynamic situations (e.g., mass on incline, mass in elevator, strings/pulleys, or Atwood machines).

INT-1.D: Calculate a value for an unknown force acting on an object accelerating in a dynamic situation (e.g., inclines, Atwood Machines, falling with air resistance, pulley systems, mass in elevator, etc.)

Science Practices

1.D: Select relevant features of a representation to answer a question or solve a problem.

3.C: Sketch a graph that shows a functional relationship between two quantities.

3.D: Create appropriate diagrams to represent physical situations.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

7.A: Make a scientific claim.

2019 SCORING GUIDELINES

Question 2

15 points

A toy rocket of mass 0.50 kg starts from rest on the ground and is launched upward, experiencing a vertical net force. The rocket's upward acceleration a for the first 6 seconds is given by the equation $a = K - Lt^2$, where $K = 9.0 \text{ m/s}^2$, $L = 0.25 \text{ m/s}^4$, and t is the time in seconds. At $t = 6.0 \text{ s}$, the fuel is exhausted and the rocket is under the influence of gravity alone. Assume air resistance and the rocket's change in mass are negligible.

- (a) LO INT-5.E, SP 6.B, 6.C
2 points

Calculate the magnitude of the net impulse exerted on the rocket from $t = 0$ to $t = 6.0 \text{ s}$.

For an expression for calculating impulse and correct substitution of $a(t)$ and m into the correct expression.	1 point
$J = \int F(t) dt$	
$J = \int ma(t) dt = (0.50) \int (9.0 - 0.25t^2) dt$	
For integrating with correct limits or including a constant of integration	1 point
$J = (0.50) \int_{t=0}^{t=6} (9.0 - 0.25t^2) dt = (0.50) \left[9.0t - \frac{1}{12}t^3 \right]_{t=0}^{t=6}$	
$J = (0.50) \left[(9.0)(6) - \left(\frac{1}{12} \right) (6)^3 \right] - 0 = 18 \text{ N}\cdot\text{s}$	
<i>Alternate Solution (using an alternate solution from part (b))</i>	
<i>Alternate Points</i>	
For correctly relating impulse to the speed of the rocket	1 point
$J = \Delta p = m(v_2 - v_1)$ OR $J = m\Delta v = mv_f$	
For correctly substituting answer from part (b) into equation above	1 point
$J = (0.50 \text{ kg})(36 - 0) \therefore J = 18 \text{ N}\cdot\text{s}$	

2019 SCORING GUIDELINES

Question 2 (continued)

- (b) LO INT-5.A.a, SP 6.A, 6.C
2 points

Calculate the speed of the rocket at $t = 6.0$ s.

For correctly relating impulse to the speed of the rocket		1 point
$J = \Delta p = m(v_2 - v_1)$ OR $J = m\Delta v = mv_f$		
For correctly substituting answer from part (a) into equation above		1 point
$(18 \text{ N}\cdot\text{s}) = (0.50 \text{ kg})(v_2 - 0) \therefore v_2 = 36 \text{ m/s}$		
<i>Alternate Solution</i>	<i>Alternate Points</i>	
<i>Integrate expression for $a(t)$ (This may have already been done in solving part (a).)</i>		1 point
$v = \int a dt = \int (9.0 - 0.25t^2) dt$		
<i>For integrating with correct limits or including a constant of integration</i>		1 point
$v = \int_{t=0}^{t=6} (9.0 - 0.25t^2) dt = \left[9.0t - \frac{1}{12}t^3 \right]_{t=0}^{t=6} = 36 \text{ m/s}$		

- (c) i. LO INT-4.C.c, SP 6.B, 6.C
2 points

Calculate the kinetic energy of the rocket at $t = 6.0$ s.

For substituting the mass of the rocket into the equation for kinetic energy		1 point
For substituting the answer from part (b) into the equation for kinetic energy		1 point
$K = \frac{1}{2}mv^2 = \left(\frac{1}{2}\right)(0.50 \text{ kg})(36 \text{ m/s})^2 = 324 \text{ J}$		

- ii. LO CHA-1.B, CON-1.E, SP 6.A, 6.C
3 points

Calculate the change in gravitational potential energy of the rocket-Earth system from $t = 0$ to $t = 6.0$ s.

For integrating the acceleration twice to derive an expression for position		1 point
For integrating with correct limits or including a constant of integration		1 point
$v(t) = \int a(t) dt = \int (9.0 - 0.25t^2) dt = 9.0t - \frac{1}{12}t^3 + v_0 = 9.0t - \frac{1}{12}t^3$		
$\Delta y = \int v(t) dt = \int_{t=0}^{t=6} \left(9.0t - \frac{1}{12}t^3 \right) dt = \left[\frac{9}{2}t^2 - \frac{1}{48}t^4 \right]_{t=0}^{t=6}$		
$\Delta y = \left[\left(\frac{9}{2} \right) (6)^2 - \left(\frac{1}{48} \right) (6)^4 \right] - 0 = 135 \text{ m}$		
For substituting into equation for potential energy		1 point
$\Delta U_g = mg\Delta y = (0.50 \text{ kg})(9.8 \text{ m/s}^2)(135 \text{ m}) = 660 \text{ J}$		

2019 SCORING GUIDELINES

Question 2 (continued)

- (d) LO CHA-1.B, CON-2.B, SP 6.B, 6.C
3 points

Calculate the maximum height reached by the rocket relative to its launching point.


For using $a = g$ in a correct kinematics equation to solve for height	1 point
$v_2^2 = v_1^2 + 2a(y_2 - y_1) \therefore 0 = v_1^2 + 2a(y_2 - y_1)$	
$y_2 - y_1 = -\frac{v_1^2}{2a} \therefore y_2 = -\frac{v_1^2}{2a} + y_1$	
For substituting the speed from part (b)	1 point
$y_2 = -\frac{(36 \text{ m/s})^2}{2(-9.8 \text{ m/s}^2)} + y_1$	
For substituting the height from part (c)	1 point
$y_2 = 66 \text{ m} + 135 \text{ m} = 201 \text{ m}$ (199.8 m if $g = 10 \text{ m/s}^2$)	
<i>Alternate Solution 1</i>	<i>Alternate Points</i>
For using energy conservation to find maximum height, consistent with the speed found in part (b).	1 point
$mg\Delta y = \frac{1}{2}mv^2 \therefore \Delta y = \frac{v^2}{2g}$	
For substituting the speed from part (b)	1 point
$\Delta y = \frac{(36 \text{ m/s})^2}{2(9.8 \text{ m/s}^2)} = 66 \text{ m}$	
For substituting the height from part (c)	1 point
$y_2 = 66 \text{ m} + 135 \text{ m} = 201 \text{ m}$ (199.8 m if $g = 10 \text{ m/s}^2$)	
<i>Alternate Solution 2</i>	<i>Alternate Points</i>
For using energy conservation to find maximum height, from kinetic and potential energies found in part (c)	1 point
$K_1 + U_1 = 0 + U_{top}$	
For substituting the kinetic energy from part (c)(i) into the equation above	1 point
For substituting the potential energy from part (c)(ii) into the equation above	1 point
$324 + 660 = (0.5)(9.8)\Delta y$	
$\Delta y = 201 \text{ m}$ (199.8 m if $g = 10 \text{ m/s}^2$)	

2019 SCORING GUIDELINES

Question 2 (continued)

- (e) LO CHA-1.C, SP 3.C
3 points

On the axes below, assuming the upward direction to be positive, sketch a graph of the velocity v of the rocket as a function of time t from the time the rocket is launched to the time it returns to the ground. T_{top} represents the time the rocket reaches its maximum height. Explicitly label the maxima with numerical values or algebraic expressions, as appropriate.

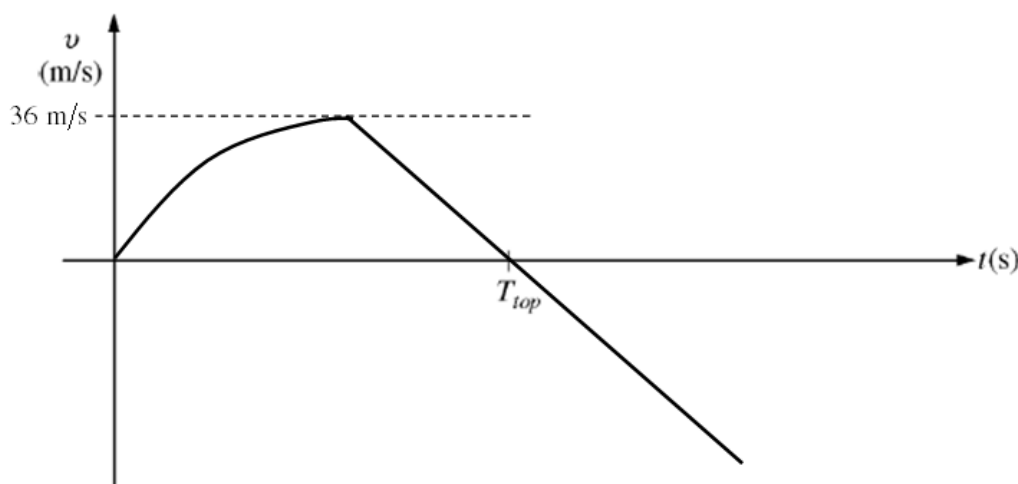

For an initial concave down curve that starts at the origin.	1 point
For a transition that occurs before T_{top} into a straight line with a negative slope.	1 point
For labeling the maximum value of the velocity, consistent with part (b), and a line that crosses the x-axis at T_{top}	1 point

2019 SCORING GUIDELINES**Question 2 (continued)****Learning Objectives**

CHA-1.B: Determine functions of position, velocity, and acceleration that are consistent with each other, for the motion of an object with a nonuniform acceleration.

CHA-1.C: Describe the motion of an object in terms of the consistency that exists between position and time, velocity and time, and acceleration and time.

CON-1.E: Calculate the potential energy of a system consisting of an object in a uniform gravitational field.

CON-2.B: Describe kinetic energy, potential energy, and total energy in relation to time (or position) for a “conservative” mechanical system.

INT-4.C.c: Calculate changes in an object’s kinetic energy or changes in speed that result from the application of specified forces.

INT-5.A.a: Calculate the total momentum of an object or system of objects.

INT-5.E: Calculate the change in momentum of an object given a nonlinear function, $F(t)$, for a net force acting on the object.

Science Practices

3.C: Sketch a graph that shows a functional relationship between two quantities.

6.A: Extract quantities from narratives or mathematical relationships to solve problems.


6.B: Apply an appropriate law, definition, or mathematical relationship to solve a problem.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

2019 SCORING GUIDELINES

Question 3

15 points

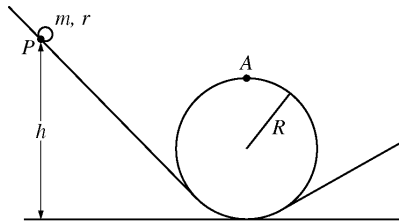

Note: Figure not drawn to scale.

The rotational inertia of a rolling object may be written in terms of its mass m and radius r as $I = bmr^2$, where b is a numerical value based on the distribution of mass within the rolling object. Students wish to conduct an experiment to determine the value of b for a partially hollowed sphere. The students use a looped track of radius $R \gg r$, as shown in the figure above. The sphere is released from rest a height h above the floor and rolls around the loop.

- (a) LO INT-2.D, SP 5.A, 5.E
2 points

Derive an expression for the minimum speed of the sphere's center of mass that will allow the sphere to just pass point A without losing contact with the track. Express your answer in terms of h , m , R , and fundamental constants, as appropriate.

For an expression relating the gravitational force to the centripetal force		1 point
$F_C = mg + F_N = \frac{mv^2}{R}$		
$mg + 0 = \frac{mv^2}{R}$		
For a correct substitution into a correct expression.		1 point
$v = \sqrt{Rg}$		

2019 SCORING GUIDELINES

Question 3 (continued)

- (b) LO INT-7.E, SP 5.A, 5.E
3 points

Suppose the sphere is released from rest at some point P and rolls without slipping. Derive an equation for the minimum release height h that will allow the sphere to pass point A without losing contact with the track. Express your answer in terms of b , m , R , and fundamental constants, as appropriate.

For using a correct expression of the conservation of energy for the object		1 point
$K_1 + U_1 = K_2 + U_2$		
For correct substitutions, including rotational kinetic energy		1 point
$0 + mgh_1 = \frac{1}{2}mv^2 + \frac{1}{2}I\omega^2 + mgh_2$		
$mgh = \frac{1}{2}mv^2 + \frac{1}{2}(bmr^2)\left(\frac{v}{r}\right)^2 + mgh_2$		
For correctly substituting for the final height and the answer from part (a) for the velocity		1 point
$gh = \frac{1}{2}(\sqrt{Rg})^2 + \frac{1}{2}(b)(\sqrt{Rg})^2 + g(2R)$		
$h = \frac{1}{2}R + \frac{1}{2}bR + 2R = \frac{1}{2}(b+5)R$		


2019 SCORING GUIDELINES**Question 3 (continued)**

The students perform an experiment by determining the minimum release height h for various other objects of radius r and known values of b . They collect the following data.

Object	b	h (m)
Solid sphere	0.40	1.08
Hollow sphere	0.67	1.13
Solid cylinder	0.50	1.10
Hollow cylinder	1.0	1.20

- (c) LO INT-7.E, SP 3.A, 4.C
4 points

On the grid below, plot the release height h as a function of b . Clearly scale and label all axes, including units, if appropriate. Draw a straight line that best represents the data.

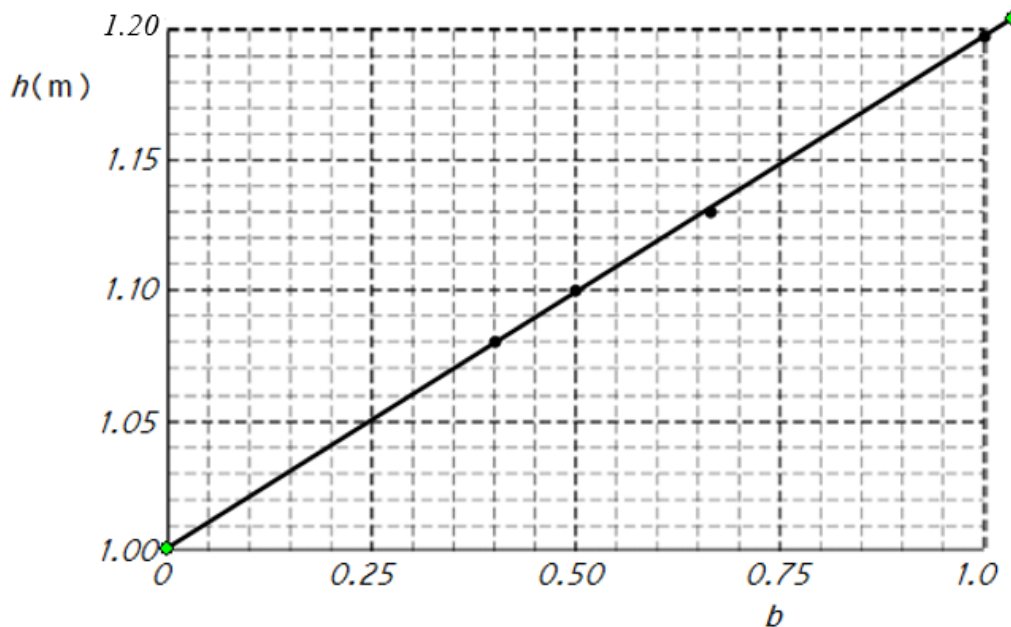

For correctly labeling both axes with variables, units for h , no units for b	1 point
For correctly using and labeling the scale of the axes so that the data uses at least half the grid	1 point
For correctly plotting the data	1 point
For drawing a best-fit straight line that represents the data	1 point

2019 SCORING GUIDELINES

Question 3 (continued)

- (d) LO INT-7.E, SP 4.D, 6.C
2 points

The students repeat the experiment with the partially hollowed sphere and determine the minimum release height to be 1.16 m. Using the straight line from part (c), determine the value of b for the partially hollowed sphere.

For correctly calculating the slope from the best-fit straight line and substituting height into the line equation		1 point
$\text{slope} = \frac{1.20 - 1.00}{1.0 - 0.0} = 0.20 \text{ m}$		
$y = mx + b \therefore h = 0.20b + 1.00$		
$1.16 = 0.20b + 1.00$		
For a correct answer for b		1 point
$b = 0.80$		
<u>Note:</u> Full credit can be earned for the correct answer if there is an indication that this was read from the graph.		

- (e) LO INT-7.E, SP 6.A, 6.C
2 points

Calculate R , the radius of the loop.

For substituting into the expression from part (b)		1 point
$h = \frac{1}{2}(b + 5)R \therefore R = \frac{2(1.16 \text{ m})}{(0.80 + 5)}$		
For an answer consistent with previous parts		1 point
$R = 0.40 \text{ m}$		
<i>Alternate Solution</i>		<i>Alternate Points</i>
For using an expression for the y-intercept (set $b = 0$)		1 point
$h = \frac{1}{2}(b + 5)R = \frac{1}{2}(0 + 5)R = \frac{5}{2}R$		
For determining the value of the intercept (1.0 m) from the graph		1 point
$1.0 \text{ m} = \frac{5}{2}R \therefore R = \frac{2}{5} \text{ m} = 0.40 \text{ m}$		

2019 SCORING GUIDELINES**Question 3 (continued)**

- (f) LO INT-7.E, SP 7.A, 7.C
2 points

In part (b), the radius r of the rolling sphere was assumed to be much smaller than the radius R of the loop. If the radius r of the rolling sphere was not negligible, would the value of the minimum release height h be greater, less, or the same?

_____ Greater _____ Less _____ The same

Justify your answer.

For selecting “Less” and any justification		1 point
For a correct justification		1 point
Examples:		
If the radius of the object is not negligible, then the center of mass of the object travels in a radius less than R . If the radius of the circle decreases, the height needed to pass through the loop decreases according to the equation from part (b).		
If the radius of the object is not negligible, then the center of mass of the object travels in a radius less than R . If the radius of the circle decreases, the speed needed to pass through the loop decreases, and thus the height needed also decreases.		

Learning Objectives

INT-2.D: Derive expressions relating centripetal force to the minimum speed or maximum speed of an object moving in a vertical circular path.

INT-7.E: Derive expressions using energy conservation principles for physical systems such as rolling bodies on inclines, Atwood Machines, pendulums, physical pendulums, and systems with massive pulleys that relate linear or angular motion characteristics to initial conditions (such as height or position) or properties of rolling body (such as moment of inertia or mass).

Science Practices

3.A: Select and plot appropriate data.

4.C: Linearize data and/or determine a best-fit line or curve.

4.D: Select relevant features of a graph to describe a physical situation or solve problems.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

6.A: Extract quantities from narratives or mathematical relationships to solve problems.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

7.A: Make a scientific claim.

7.C: Support a claim with evidence from physical representations.

2018**AP[®]** **CollegeBoard**

AP Physics C: Mechanics

Scoring Guidelines


2018 SCORING GUIDELINES**General Notes About 2018 AP Physics Scoring Guidelines**

1. The solutions contain the most common method of solving the free-response questions and the allocation of points for this solution. Some also contain a common alternate solution. Other methods of solution also receive appropriate credit for correct work.
2. The requirements that have been established for the paragraph-length response in Physics 1 and Physics 2 can be found on AP Central at <https://secure-media.collegeboard.org/digitalServices/pdf/ap/paragraph-length-response.pdf>.
3. Generally, double penalty for errors is avoided. For example, if an incorrect answer to part (a) is correctly substituted into an otherwise correct solution to part (b), full credit will usually be awarded. One exception to this may be cases when the numerical answer to a later part should be easily recognized as wrong, e.g., a speed faster than the speed of light in vacuum.
4. Implicit statements of concepts normally receive credit. For example, if use of the equation expressing a particular concept is worth 1 point, and a student's solution embeds the application of that equation to the problem in other work, the point is still awarded. However, when students are asked to derive an expression, it is normally expected that they will begin by writing one or more fundamental equations, such as those given on the exam equation sheet. For a description of the use of such terms as “derive” and “calculate” on the exams, and what is expected for each, see “The Free-Response Sections — Student Presentation” in the *AP Physics; Physics C: Mechanics, Physics C: Electricity and Magnetism Course Description* or “Terms Defined” in the *AP Physics 1: Algebra-Based Course and Exam Description* and the *AP Physics 2: Algebra-Based Course and Exam Description*.
5. The scoring guidelines typically show numerical results using the value $g = 9.8 \text{ m/s}^2$, but the use of 10 m/s^2 is of course also acceptable. Solutions usually show numerical answers using both values when they are significantly different.
6. Strict rules regarding significant digits are usually not applied to numerical answers. However, in some cases answers containing too many digits may be penalized. In general, two to four significant digits are acceptable. Numerical answers that differ from the published answer due to differences in rounding throughout the question typically receive full credit. Exceptions to these guidelines usually occur when rounding makes a difference in obtaining a reasonable answer. For example, suppose a solution requires subtracting two numbers that should have five significant figures and that differ starting with the fourth digit (e.g., 20.295 and 20.278). Rounding to three digits will lose the accuracy required to determine the difference in the numbers, and some credit may be lost.

2018 SCORING GUIDELINES

Question 1

15 points total

Distribution
of points

A student wants to determine the value of the acceleration due to gravity g for a specific location and sets up the following experiment. A solid sphere is held vertically a distance h above a pad by an electromagnet, as shown in the figure above. The experimental equipment is designed to release the sphere when the electromagnet is turned off. A timer also starts when the electromagnet is turned off, and the timer stops when the sphere lands on the pad.

(a) 2 points

While taking the first data point, the student notices that the electromagnet actually releases the sphere after the timer begins. Would the value of g calculated from this one measurement be greater than, less than, or equal to the actual value of g at the student's location?

____ Greater than ____ Less than ____ Equal to

Justify your answer.

For selecting "Less than" with an attempt at a relevant justification	1 point
For a correct justification	1 point
<i>Example: Because the measured time to fall the same distance will be larger, the acceleration must be less.</i>	
<i>Example: Because the time is larger and $a \propto 1/t^2$, then g must decrease.</i>	

2018 SCORING GUIDELINES

Question 1 (continued)

Distribution of points

The electromagnet is replaced so that the timer begins when the sphere is released. The student varies the distance h . The student measures and records the time Δt of the fall for each particular height, resulting in the following data table.

h (m)	0.10	0.20	0.60	0.80	1.00
Δt (s)	0.105	0.213	0.342	0.401	0.451

(b) 1 point

Indicate below which quantities should be graphed to yield a straight line whose slope could be used to calculate a numerical value for g .

Vertical axis: _____

Horizontal axis: _____

Use the remaining rows in the table above, as needed, to record any quantities that you indicated that are not given in the table. Label each row you use and include units.

For correctly indicating two variables that will yield a straight line that could be used to determine a value for g		1 point
<i>Example: Vertical Axis: h</i> <i>Horizontal Axis: $(\Delta t)^2$</i>		
Note: Student earns full credit if axes are reversed or if they use another acceptable combination.		


AP PHYSICS C: MECHANICS 2018 SCORING GUIDELINES

Question 1 (continued)

**Distribution
of points**

(c) 4 points

Plot the data points for the quantities indicated in part (b) on the graph below. Clearly scale and label all axes, including units if appropriate. Draw a straight line that best represents the data.

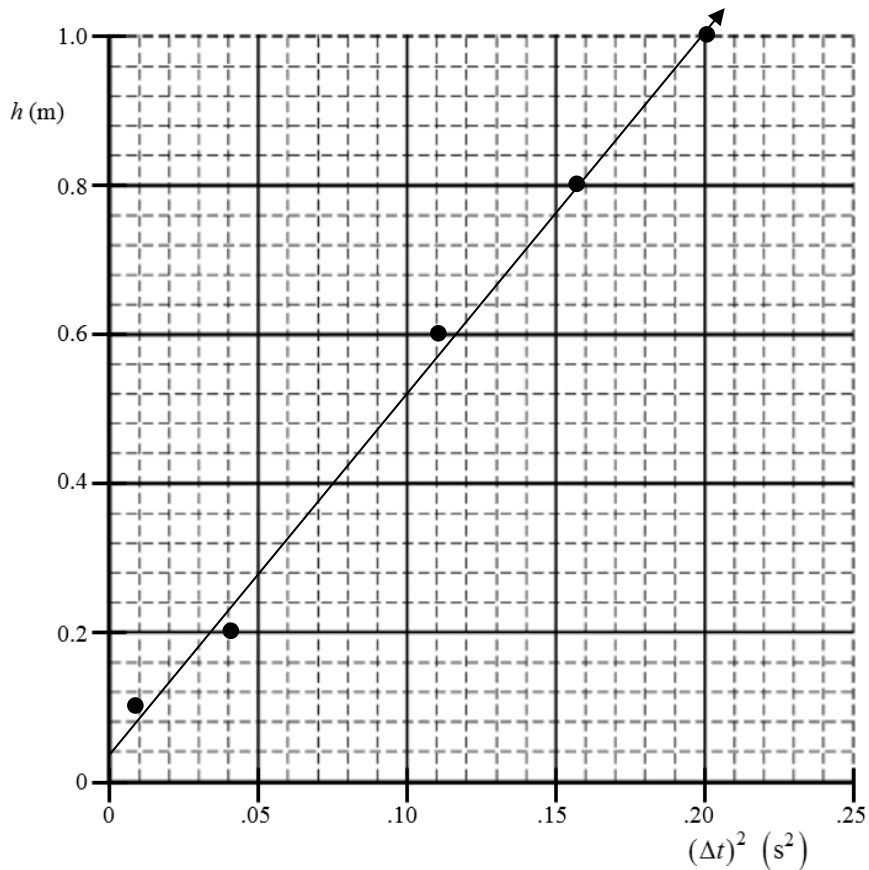

For a correct scale that uses more than half the grid	1 point
For correctly labeling the axis with variables and units consistent with part (b)	1 point
For correctly plotting data consistent with part (b)	1 point
For drawing a straight line consistent with the plotted data	1 point

2018 SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

(d) 2 points

Using the straight line, calculate an experimental value for g .

For using points on the line rather than the data to calculate the slope	1 point
$\text{slope} = \frac{\Delta h}{\Delta(\Delta t)^2} = \frac{(0.80 - 0.20) \text{ m}}{(0.160 - 0.039) \text{ s}^2} = 4.96 \text{ m/s}^2$ (Linear regression = 4.83 m/s^2)	
For correctly relating the slope to the acceleration due to gravity	1 point
$\text{slope} = \frac{1}{2}g \therefore g = 2 \times \text{slope} = 2 \times (4.96 \text{ m/s}^2)$	
$g = 9.92 \text{ m/s}^2$ (Linear regression = 9.66 m/s^2)	

Another student fits the data in the table to a quadratic equation. The student's equation for the distance fallen y as a function of time t is $y = At^2 + Bt + C$, where $A = 5.75 \text{ m/s}^2$, $B = -0.524 \text{ m/s}$, and $C = +0.080 \text{ m}$. Vertically down is the positive direction.

(e) Using the student's equation above, do the following.

i. 1 point

Derive an expression for the velocity of the sphere as a function of time.

For correctly taking the time derivative of the given equation	1 point
$y = y_0 + v_1t + \frac{1}{2}at^2 = At^2 + Bt + C$	
$v(t) = \frac{dy}{dt} = 2At + B$	
Note: Credit is earned for substituting numbers: $v(t) = (11.5 \text{ m/s}^2)t - 0.524 \text{ m/s}$.	

ii. 2 points

Calculate the new experimental value for g .

For correctly relating the given equation to a correct kinematic equation	1 point
$\Delta y = y - y_0 = v_1t + \frac{1}{2}at^2$	
$y = y_0 + v_1t + \frac{1}{2}at^2 = At^2 + Bt + C$	
For correctly relating the equation to the value of g	1 point
$A = \frac{1}{2}a = \frac{1}{2}g$	
$g = 2A = (2)(5.75 \text{ m/s}^2) = 11.5 \text{ m/s}^2$	

2018 SCORING GUIDELINES

Question 1 (continued)

**Distribution
of points**

iii. 1 point

Using 9.81 m/s^2 as the accepted value for g at this location, calculate the percent error for the value found in part (e)(ii).

For correctly calculating the percent error	1 point
$\% \text{error} = \frac{ \text{acc} - \text{exp} }{\text{acc}} \times 100\% = \frac{ (11.5 \text{ m/s}^2) - (9.81 \text{ m/s}^2) }{(9.81 \text{ m/s}^2)} \times 100\%$	
$\% \text{error} = 17.2\%$	
Note: Credit is earned if percent error is expressed as positive or negative.	

iv. 2 points

Assuming the sphere is at a height of 1.40 m at $t = 0$, calculate the velocity of the sphere just before it strikes the pad.

For relating the coefficients of the equation to the kinematic variables	1 point
$y = At^2 + Bt + C \therefore v_1 = B = -0.524 \text{ m/s}$	
$a = 2A = 2 \times (5.75 \text{ m/s}^2) = 11.5 \text{ m/s}^2$	
$y_0 = C = 0.080 \text{ m}$	
For correctly using an appropriate kinematics equation to determine the velocity of the sphere	1 point
$v_2^2 = v_1^2 + 2a\Delta y$	
$v = \sqrt{v_1^2 + 2a\Delta y} = \sqrt{(-0.524 \text{ m/s})^2 + (2)(11.5 \text{ m/s}^2)(1.40 \text{ m} - 0.080 \text{ m})}$	
$v = 5.54 \text{ m/s}$	
Alternate solution:	Alternate Points
For correctly determining the time of fall for the sphere	1 point
$y = At^2 + Bt + C$	
$1.40 = (5.75 \text{ m/s}^2)t^2 + (-0.524 \text{ m/s})t + (0.080 \text{ m})$	
$5.75t^2 - 0.524t - 1.32 = 0$	
$t = 0.53 \text{ s}$ or $-0.44 \text{ s} \therefore t = 0.53 \text{ s}$	
For correctly using the equation from part (e)(i)	1 point
$v(t) = (11.5 \text{ m/s}^2)(0.53 \text{ s}) - 0.524 \text{ m/s}$	
$v = 5.54 \text{ m/s}$	

AP PHYSICS C: MECHANICS
2018 SCORING GUIDELINES

Question 1 (continued)

**Distribution
of points**


- (e)
iv. (continued)

<i>Alternate Solution — Conservation of Energy</i>		
<i>For relating the coefficients of the equation to the initial height and speed</i>		1 point
$y = At^2 + Bt + C \therefore v_1 = B = -0.524 \text{ m/s}$		
$y_0 = C = 0.080 \text{ m}$		
<i>For correctly using conservation of energy to determine the velocity of the sphere</i>		1 point
$U_i + K_i = U_f + K_f$		
$mgh + \frac{1}{2}mv_1^2 = \frac{1}{2}mv^2$		
$v = \sqrt{2(11.5)(1.40 - 0.080) + (-0.524)^2} = 5.54 \text{ m/s}$		


2018 SCORING GUIDELINES

Question 2

15 points total

Distribution
of points

Two carts are on a horizontal, level track of negligible friction. Cart 1 has a sensor that measures the force exerted on it during a collision with cart 2, which has a spring attached. Cart 1 is moving with a speed of $v_0 = 3.00 \text{ m/s}$ toward cart 2, which is at rest, as shown in the figure above. The total mass of cart 1 and the force sensor is 0.500 kg , the mass of cart 2 is 1.05 kg , and the spring has negligible mass. The spring has a spring constant of $k = 130 \text{ N/m}$. The data for the force the spring exerts on cart 1 are shown in the graph below. A student models the data as the quadratic fit $F = 3200 \text{ N/s}^2 t^2 - 500 \text{ N/s } t$.

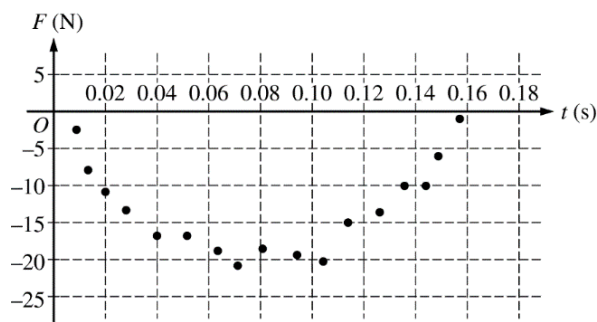

(a) 3 points

Using integral calculus, calculate the total impulse delivered to cart 1 during the collision.

For using the given force equation in the integral to determine the impulse delivered to the cart	1 point
$J = \int F \cdot dt = \int 3200t^2 - 500t \, dt$	
For integrating the force using the correct limits or constant of integration	1 point
$J = \int_{t=0}^{t=0.16 \text{ s}} (3200t^2 - 500t) dt = \left[\frac{3200}{3}t^3 - 250t^2 \right]_{t=0}^{t=0.16}$	
$J = \left(\left(\frac{3200}{3} \right) (0.16)^3 - (250)(0.16)^2 \right) - 0$	
For a correct answer	1 point
$J = -2.03 \text{ N}\cdot\text{s}$	

2018 SCORING GUIDELINES

Question 2 (continued)

Distribution
of points

(b)

i. 1 point

Calculate the speed of cart 1 after the collision.

For correct substitution into the impulse-momentum equation of the answer from part (a) to determine the speed of cart 1		1 point
$J = m_1(v_{1f} - v_{1i}) \therefore v_{1f} = \frac{J}{m_1} + v_{1i} = \frac{(-2.03 \text{ N}\cdot\text{s})}{(0.500 \text{ kg})} + (3.00 \text{ m/s})$		
$v_{1f} = -1.06 \text{ m/s}$		

ii. 1 point

In which direction does cart 1 move after the collision?

☐ Left ☐ Right☐ The direction is undefined, because the speed of cart 1 is zero after the collision.

For correctly selecting “Left”		1 point
--------------------------------	--	---------

(c)

i. 2 points

Calculate the speed of cart 2 after the collision.

For using a correct equation to determine the speed of cart 2		1 point
$-J = -m_1(v_{1f} - v_{1i}) = m_2 v_{2f} \therefore v_{2f} = \frac{-J}{m_2}$		
For correct substitution of the answer from part (a)		1 point
$v_{2f} = \frac{(2.03 \text{ N}\cdot\text{s})}{(1.05 \text{ kg})}$		
$v_{2f} = 1.93 \text{ m/s}$		

2018 SCORING GUIDELINES

Question 2 (continued)

Distribution
of points

- (c)
-
- i. (continued)

<i>Alternate solution</i>		<i>Alternate Points</i>
<i>For using the conservation of momentum to calculate the speed of cart 2 after the collision</i>		<i>1 point</i>
$m_1 v_{1i} = m_1 v_{1f} + m_2 v_{2f} \therefore v_{2f} = \frac{m_1 (v_{1i} - v_{1f})}{m_2}$		
<i>For correct substitution of the answer from part (b)(i)</i>		<i>1 point</i>
$v_{2f} = \frac{(0.500 \text{ kg})((3.00 \text{ m/s}) - (-1.06 \text{ m/s}))}{(1.05 \text{ kg})} = 1.93 \text{ m/s}$		

- ii. 2 points

Show that the collision between the two carts is elastic.

For indicating that the initial and final kinetic energies must be equal		1 point
$K_{1i} = K_{1f} + K_{2f}$		
For correct substitutions of answers from parts (b)(i) and (c)(i) into the calculations of the initial and final kinetic energies		1 point
$\left(\frac{1}{2}\right)(0.500 \text{ kg})(3.00 \text{ m/s})^2 = \left(\frac{1}{2}\right)(0.500 \text{ kg})(-1.06 \text{ m/s})^2 + \left(\frac{1}{2}\right)(1.05 \text{ kg})(1.93 \text{ m/s})^2$		
$2.25 \text{ J} \approx 2.24 \text{ J}$		

- (d)
-
- i. 2 points

Calculate the speed of the center of mass of the two-cart-spring system.

For using the equation for the conservation of momentum to calculate the speed for the center of mass of the system		1 point
$m_1 v_{1i} = (m_1 + m_2) v_{cm} \therefore v_{cm} = \frac{m_1 v_{1i}}{(m_1 + m_2)}$		
For correct substitution into the equation above		1 point
$v_{cm} = \frac{(0.500 \text{ kg})(3.00 \text{ m/s})}{(0.500 \text{ kg} + 1.05 \text{ kg})} = 0.97 \text{ m/s}$		

2018 SCORING GUIDELINES

Question 2 (continued)

Distribution
of points

(d) (continued)

ii. 3 points

Calculate the maximum elastic potential energy stored in the spring.


For using conservation of energy to calculate the maximum elastic potential energy stored in the spring	1 point
$K_i = K_f + U_{sf}$	
For using the speed of the center of mass of the system for kinetic energy	1 point
$\frac{1}{2} m_1 v_{1i}^2 = \frac{1}{2} (m_1 + m_2) v_{cm}^2 + U_{sf}$	
$U_{sf} = \frac{1}{2} m_1 v_{1i}^2 - \frac{1}{2} (m_1 + m_2) v_{cm}^2$	
For correct substitution into above equation	1 point
$U_S = \left(\frac{1}{2}\right)(0.500 \text{ kg})(3.00 \text{ m/s})^2 - \frac{1}{2}(0.500 \text{ kg} + 1.05 \text{ kg})(0.97 \text{ m/s})^2$	
$U_S = 1.52 \text{ J}$	
<i>Alternate Solution:</i>	<i>Alternate Points</i>
For correctly determining the magnitude of the maximum force exerted between the carts	1 point
Set $\frac{dF}{dt} = 0 = 6400t - 500 \therefore 6400t = 500 \therefore t = 0.078 \text{ s}$	
$F_{MAX} = 3200(0.078)^2 - 500(0.078) = -19.5$	
$ F_{MAX} = 19.5 \text{ N}$	
<i>Note: Can estimate from the graph, and accept the range of 20 N to 21 N.</i>	
For calculating the maximum compression of the spring	1 point
$F_{MAX} = -kx_{MAX}$	
$x_{MAX} = -\frac{F_{MAX}}{k} = -\frac{(-19.5 \text{ N})}{(130 \text{ N/m})} = 0.15 \text{ m}$	
<i>Note: If estimating from the graph, accept the range from 0.15 m to 0.16 m.</i>	
For substituting into an equation for the elastic potential energy at maximum spring compression	1 point
$U_S = \frac{1}{2} kx_{MAX}^2 = \left(\frac{1}{2}\right)(130 \text{ N/m})(0.15 \text{ m})^2$	
$U_S = 1.46 \text{ J}$	
<i>Note: If estimating from the graph, accept range from 1.46 J to 1.70 J.</i>	

Units point: 1 point for correct units on all calculated answers

2018 SCORING GUIDELINES

Question 3

15 points total

Distribution
of points

A triangular rod, shown above, has length L , mass M , and a nonuniform linear mass density given by the equation $\lambda = \frac{2M}{L^2}x$, where x is the distance from one end of the rod.

(a) 3 points

Using integral calculus, show that the rotational inertia of the rod about its left end is $ML^2/2$.

For relating x to r properly in an integral to calculate the moment of inertia		1 point
$I = \int r^2 dm = \int x^2 dm$		
For correctly using the linear mass density to substitute into the equation above		1 point
$m = \int \lambda dx = \int \left(2M/L^2 \right) x dx \therefore dm = \left(2M/L^2 \right) x dx$		
$I = \int \left(2M/L^2 \right) x^3 dx$		
For integrating using the correct limits or constant of integration		1 point
$I = \int_{x=0}^{x=L} \left(2M/L^2 \right) x^3 dx = \left[\frac{\left(2M/L^2 \right) x^4}{4} \right]_{x=0}^{x=L} = \frac{2M}{L^2} \left(\frac{L^4}{4} - 0 \right) = ML^2/2$		

2018 SCORING GUIDELINES

Question 3 (continued)


Distribution
of points

Figure 1




Figure 2

The thin hoop shown above in Figure 1 has a mass M , radius L , and a rotational inertia around its center of ML^2 . Three rods identical to the rod from part (a) are now fastened to the thin hoop, as shown in Figure 2 above.

(b) 2 points

Derive an expression for the rotational inertia I_{tot} of the hoop-rods system about the center of the hoop. Express your answer in terms of M , L , and physical constants, as appropriate.

For setting the total rotational inertia for the hoop-rods system equal to the sum of the rotational inertias of the hoop and the three rods		1 point
$I = 3I_{rod} + I_{hoop}$		
$I = 3\left(ML^2/2\right) + ML^2$		
For a correct answer with work		1 point
$I = \frac{5}{2}ML^2$		

The hoop-rods system is initially at rest and held in place but is free to rotate around its center. A constant force F is exerted tangent to the hoop for a time Δt .

(c) 3 points


Derive an expression for the final angular speed ω of the hoop-rods system. Express your answer in terms of M , L , F , Δt , and physical constants, as appropriate.

For using an appropriate equation to determine the final angular speed of the hoop		1 point
$\tau\Delta t = I(\omega_2 - \omega_1)$		
$Fr\Delta t = I\omega$		
$\omega = \frac{Fr\Delta t}{I}$		
For relating the lever arm to the length of the rod		1 point
$\omega = \frac{FL\Delta t}{I}$		
For correct substitution from part (b)		1 point
$\omega = \frac{FL\Delta t}{\left(\frac{5}{2}\right)ML^2} = \frac{2F\Delta t}{5ML}$		

2018 SCORING GUIDELINES

Question 3 (continued)

Distribution
of points

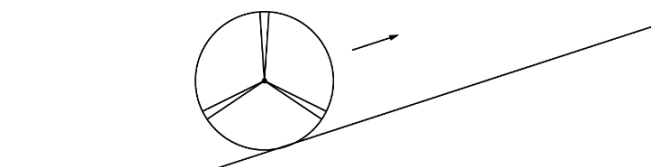


The hoop-rods system is rolling without slipping along a level horizontal surface with the angular speed ω found in part (c). At time $t = 0$, the system begins rolling without slipping up a ramp, as shown in the figure above.

(d)

i. 3 points

On the figure of the hoop-rods system below, draw and label the forces (not components) that act on the system. Each force must be represented by a distinct arrow starting at, and pointing away from, the point at which the force is exerted on the system.

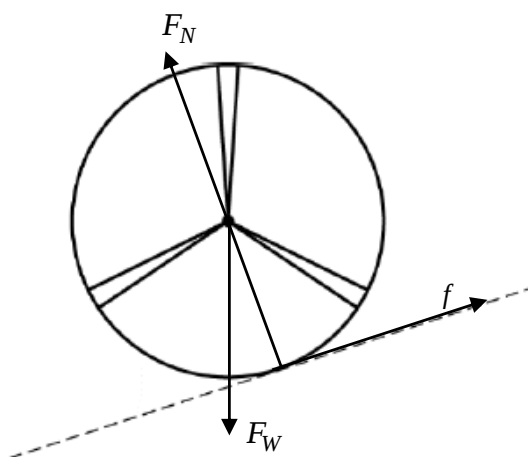

For drawing the weight of the hoop-rod system in the correct direction	1 point
For drawing the normal force in the correct direction	1 point
For drawing the frictional force in the correct direction	1 point
Note: A maximum of two points can be earned if there are any extraneous vectors or any vector has an incorrect point of exertion.	

2018 SCORING GUIDELINES

Question 3 (continued)

**Distribution
of points**

ii. 1 point

Justify your choice for the direction of each of the forces drawn in part (d)(i).

For a correct justification of the direction of the forces in part (d)(i)	1 point
<i>Example: The normal force is always perpendicular to the surface, so it will be directed up and to the left. The gravitational force is always vertically downward. The friction will be opposite of the direction of rotation; therefore, it is directed up the incline.</i>	

(e) 3 points

Derive an expression for the change in height of the center of the hoop from the moment it reaches the bottom of the ramp until the moment it reaches its maximum height. Express your answer in terms of M , L , I_{tot} , ω , and physical constants, as appropriate.

For including both linear and rotational kinetic energy in an equation for the conservation of energy to determine the final height of the hoop	1 point
$K_1 = U_{g2}$	
$\frac{1}{2}mv^2 + \frac{1}{2}I\omega^2 = mgH$	
$H = \frac{\frac{1}{2}mv^2 + \frac{1}{2}I\omega^2}{mg}$	
For correct substitution of $v = L\omega$	1 point
$H = \frac{\frac{1}{2}m(L\omega)^2 + \frac{1}{2}I_{tot}\omega^2}{mg}$	
$H = \frac{\frac{1}{2}(m_{tot}L^2 + I_{tot})\omega^2}{m_{tot}g}$	
For correct substitution of inertias into energy equation	1 point
$H = \frac{\frac{1}{2}((3M + M)L^2 + I_{tot})\omega^2}{(3M + M)g} = \frac{(4ML^2 + I_{tot})\omega^2}{8Mg}$	

AP[®] Physics C: Mechanics 2016 Scoring Guidelines

© 2016 The College Board. College Board, Advanced Placement Program, AP, AP Central, and the acorn logo are registered trademarks of the College Board.

Visit the College Board on the Web: www.collegeboard.org.

AP Central is the official online home for the AP Program: apcentral.collegeboard.org.


2016 SCORING GUIDELINES

Question

15 points total

Distribution
of points

3 points

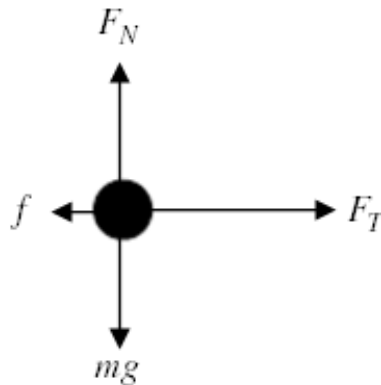

For correctly drawing and labeling the force of tension

1 point

For correctly drawing and labeling the force of friction


1 point

For correctly drawing and labeling both forces in the vertical direction

1 point

Note: A maximum of two points may be earned if there are any extraneous vectors.

3 points

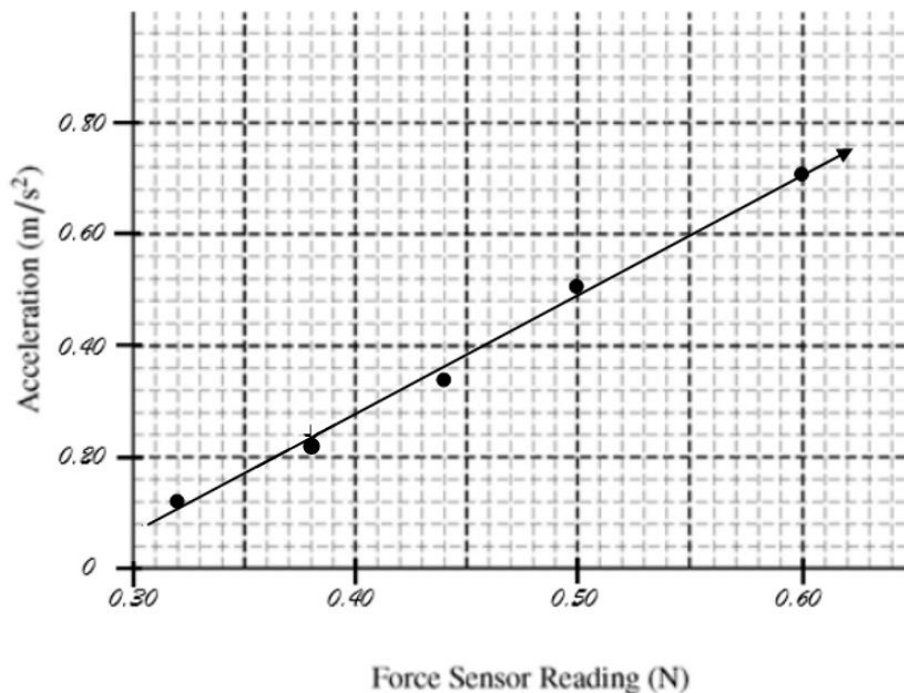

For a correct scale that uses more than half the grid

1 point

For correctly plotting the given data

1 point

For drawing a straight line consistent with the given data

1 point

Note: Full credit can be earned if the axes are switched.

SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

2 points

For correctly calculating slope using the best-fit straight line and not data points

1 point

$$\text{slope} = \frac{(y_2 - y_1)}{(x_2 - x_1)} = \frac{(0.70 - 0.16)}{(0.60 - 0.35)} \text{ kg}^{-1} = 2.16 \text{ kg}^{-1}$$

Note: Linear regression gives slope = 2.12 kg^{-1} .

For correctly calculating the mass of the cart using the slope

1 point

$$m = \frac{1}{\text{slope}} = \frac{1}{(2.16 \text{ kg}^{-1})}$$

Correct answer:

$$m = 0.463 \text{ kg} \text{ (Note: linear regression gives } m = 0.472 \text{ kg)}$$

1 point

For an answer with correct units consistent with the x-intercept of the graph from (b) i.

1 point

$$f = 0.272 \text{ N}$$

1 point

Applying Newton's second law and substituting the values from part (b)

$$\sum F = ma = F_a - f$$

$$a = \frac{F_a - f}{m} = \frac{0.45 \text{ N} - 0.272 \text{ N}}{0.463 \text{ kg}}$$

For an answer with correct units consistent with part (b), either from the graph or calculated using the mass and frictional force.

1 point

$$a = 0.376 \text{ m/s}^2$$

SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

3 points

For using a correct equation to solve for the speed of the cart when the string breaks, with an acceleration consistent with part (c) i. 1 point

$$v_2 = v_1 + at$$

$$v_2 = 0 + (0.376 \text{ m/s}^2)(2.0 \text{ s})$$

$$v_2 = 0.752 \text{ m/s}$$

For recognizing that the acceleration of the cart after the string breaks is due to the frictional force determined in part (b) 1 point

Use a correct equation to solve for the time for the cart to stop after the string breaks

$$v_2 = v_1 + at$$

$$0 = v_1 - \frac{f}{m}t$$

For using the final velocity before the string breaks as the initial velocity for the cart stopping in the correct equation for time 1 point

$$t = \frac{mv_1}{f}$$

$$t = \frac{(0.463 \text{ kg})(0.752 \text{ m/s})}{(0.272 \text{ N})}$$

Correct answer

$$t = 1.28 \text{ s}$$

*Alternate solution**Alternate points*

For setting the magnitude of the impulse before the string breaks equal to the magnitude of the impulse after the string breaks 1 point

$$F_1 t_1 = F_2 t_2$$

For correctly using the proper force (e.g., the tension force minus the friction force) for F_1 1 point

For correctly using the proper force (e.g., the friction force) for F_2 1 point

Correct answer

$$t = 1.28 \text{ s}$$

1 point

For selecting “Equal to” 1 point

1 point

For selecting “Greater than” 1 point



SCORING GUIDELINES

Question

15 points total

Distribution
of points

2 points

Block of Mass $2M$ Block of Mass $3M$ For correctly drawing and labeling vectors on the block of mass $2M$

1 point

For correctly drawing and labeling vectors on the block of mass $3M$ using symbols for the vectors that are physically correct and different from those on the block of mass $2M$

1 point

Note: A maximum of one point can be earned if there are any extraneous vectors.

2 points

Using a proper expression for conservation of momentum

$$p_1 = p_2$$

For correctly substituting into the above equation

1 point

$$3Mv_0 = (3M + 2M)v_f$$

For a correct answer

1 point

$$v_f = \frac{3}{5}v_0$$

(1 point

Using a proper expression for kinetic energy of the two-block system

$$K = \frac{1}{2}mv^2$$

$$K = \frac{1}{2}(5M)\left(\frac{3}{5}v_0\right)^2$$

For an answer consistent with part (b)

1 point

$$K = \frac{9}{10}Mv_0^2$$

SCORING GUIDELINES

Question continued)

Distribution
of points

4 points

For a correct expression of the conservation of energy

1 point

$$\Delta K_{\text{system}} + \Delta U_{\text{system}} = 0$$

$$K_0 = U_{\text{final}}$$

For attempting to integrate the spring force equation

1 point

$$\frac{9}{10} M v_0^2 = - \int_{x_1}^{x_2} -Bx^3 dx$$

$$\frac{9}{10} M v_0^2 = \int_{x_1}^{x_2} Bx^3 dx$$

For using the correct limits of integration or an appropriate constant of integration

1 point

$$\frac{9}{10} M v_0^2 = \int_0^D Bx^3 dx$$

$$\frac{9}{10} M v_0^2 = \left[\frac{Bx^4}{4} \right]_0^D$$

For an answer consistent with the speed from (b) or the kinetic energy from part (c)

1 point

$$D = \sqrt[4]{\frac{18 M v_0^2}{5B}}$$

2 points

For selecting the correct answer “Right” with a reasonable attempt at a justification

1 point

If the incorrect selection is made, no points are earned for the justification.

For an indication that at maximum compression the block of mass $2M$ has an acceleration to the right due to the forces acting on the block of mass $2M$ or an acceleration to the right due to the external spring force acting on the system of blocks

1 point

Example: At maximum compression the two-block system is instantaneously at rest. The only horizontal external force acting on the system is due to the spring. This force is directed to the right. The system and therefore the block of mass $2M$ is accelerated to the right, which implies that the net force acting on the block of mass $2M$ is also to the right.

SCORING GUIDELINES

Question continued)

Distribution
of points

2 points

a magnitude of the net force is greater on the block of mass $3M$.

If the incorrect selection is made, no points are earned for the justification.

For an indication that both blocks will have the same acceleration

1 point

For a correct justification for why the net force is greater on the block of mass $3M$

1 point

Example:

Because the blocks stick together, both blocks must have the same acceleration.

Because the block of mass $3M$ has more mass, the net force on it must be greater than the net force on the block of mass $2M$.

2 points

For selecting the correct answer “No,” with a reasonable attempt at a justification

1 point

If the incorrect selection is made, no points are earned for the justification.

If the correct answer is selected without any justification, the point is not earned for the selection.

For an indication that the spring does not apply a linear force and that simple harmonic motion is the resulting motion of a linear restoring force

1 point

$$\left(a = -\frac{k}{m} \Delta x \right)$$

Example:

Because the blocks are sticking together and are attached to the spring, the spring will apply a restoring force to the blocks. However, because the restoring force exerted by a nonlinear spring is not proportional to the blocks' displacement from equilibrium, the blocks do not exhibit simple harmonic motion.

2016 SCORING GUIDELINES

Question

15 points total

Distribution
of points

3 points

For an indication that the spring force equals the mass times the centripetal acceleration

1 point

$$F_S = F_C = ma_C$$

$$kx = mr\omega^2$$

correct substitution for x in the equation

1 point

For a correct substitution for r in the equation that can be used to solve for k

1 point

$$k\left(\frac{d}{2}\right) = m(2d)\omega^2$$

correct answer:

$$k = 4m\omega^2$$

1 point

Substitute values for the block into the equation for rotational inertia

$$I = \sum mr^2 = m(2d)^2$$

For a correct answer or an answer consistent with the radius used in part (a)

1 point

$$I = 4md^2$$

2 points

For an indication that the rotational inertia of the system must include the platform, the rod, and the object

1 point

$$I = I_P + I_R + I_O$$

$$I = \frac{m_P R^2}{2} + \frac{m_R d^2}{3} + mr^2$$

For correctly substituting into the equation the rotational inertia of the platform, the rod, and the object consistent with (b) i.

1 point

$$I = \frac{5m(2d)^2}{2} + \frac{3m d^2}{3} + 4md^2$$

$$I = (10 + 1 + 4)md^2$$

correct answer:

$$I = 15md^2$$

1 point

Using a correct expression of angular momentum

$$L = I\omega$$

For an answer consistent with the answer from part (b) ii.

1 point

$$L = 15md^2\omega$$

SCORING GUIDELINES

Question continued)

Distribution
of points

3 points

For indicating that the spring force equals the mass times the centripetal acceleration

1 point

$$F_S = F_C = ma_C$$

$$kx = mr\omega^2$$

For a correct substitution for k , or a substitution consistent with part (a), in the equation

1 point

For a correct substitution for r in the equation that can be used to solve for x

1 point

$$(4m\omega^2)x = m(d + x)\omega^2$$

$$4x = d + x$$

$$3x = d$$

Correct answer:

$$x = d/3$$

2 points

electing “Decreasing”

1 point

the wrong selection is made, no points are earned for the justification.

For a correct justification

1 point

Example: The rotational inertia I of the system decreases while the angular velocity ω stays the same. Because the angular momentum is $I\omega$, it decreases.

2 points

For selecting “Negative”

1 point


If the wrong selection is made, no points are earned for the justification.

For a correct justification

1 point

Example: Because the angular velocity is constant and the rotational inertia has decreased, the rotational kinetic energy has decreased. Therefore, work must be negative.

1 point

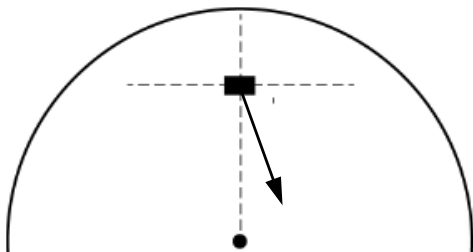

n arrow starting on the box and pointing down and to the right

1 point

AP[®] Physics C: Electricity and Magnetism

2015 Scoring Guidelines

© 2015 The College Board. College Board, Advanced Placement Program, AP, AP Central, and the acorn logo are registered trademarks of the College Board.

Visit the College Board on the Web: www.collegeboard.org.

AP Central is the official online home for the AP Program: apcentral.collegeboard.org.

2015 SCORING GUIDELINES


Question 1

15 points total

Distribution
of points

(a)


i. 1 point

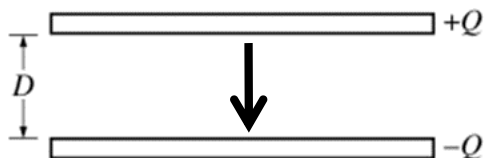

For at least one arrow between the plates pointing downward from the positive plates toward the negative plate and no extraneous arrows pointing in any other direction

1 point

ii. 1 point

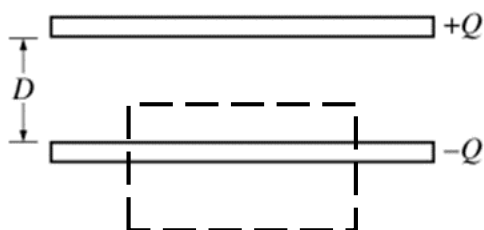

For drawing an appropriate Gaussian surface (enclosing at least the inner edge of one of the plates) that can be used to determine the electric field between the plates

1 point

iii. 3 points

For using a correct statement of Gauss's law

1 point

$$\oint \vec{E} \cdot d\vec{A} = \frac{Q}{\epsilon_0}$$

For applying Gauss's law, using an enclosed charge and surface area consistent with the surface drawn in part (a)-ii

1 point

$E(A_{GS}) = \frac{q_{enc}}{\epsilon_0}$ (A_{GS} is the area of the end of the Gaussian surface between the plates)

$$E = \frac{q_{enc}}{\epsilon_0 A_{GS}} \quad \left(\text{using } \sigma = \frac{q_{enc}}{A_{GS}} \right)$$

$$E = \frac{\sigma}{\epsilon_0} \quad \left(\text{using } \sigma = \frac{Q}{A} \right)$$

For a correct answer with work shown

1 point

$$E = \frac{Q}{\epsilon_0 A}$$

2015 SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

(b) 1 point

Comparing the equation for electric field between parallel plates to the given equation:

$$E = \frac{Q}{\kappa \epsilon_0 A} = \frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A}$$

For an answer consistent with part (a)-iii

1 point

$$\kappa = \kappa_0 e^{-x/D}$$

(c)
i. 1 point

Using the equation relating the electric field to potential difference

$$E = -\frac{dV}{dx}$$

For a correct differential equation

1 point

$$\frac{dV}{dx} = -\left(-\frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A}\right)$$

$$\frac{dV}{dx} = \frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A}$$

Alternate Solution:

Alternate Point

Using the equation relating the electric field to potential difference:

$$\Delta V = -\int \vec{E} \cdot d\vec{r}$$

For a correct differential equation

1 point

$$\Delta V = -\int -\frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A} dx$$

$$\Delta V = \int \frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A} dx$$

2015 SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

(c) (continued)

ii. 4 points

Separating the variables in the differential equation from part (c)(i):

$$\frac{dV}{dx} = \frac{Q}{\epsilon_0 \kappa_0 e^{-x/D} A}$$

$$dV = \left(\frac{Q}{\epsilon_0 \kappa_0 A} \right) e^{x/D} dx$$

For using the correct limits of integration in attempting to integrate the equation above

1 point

$$\int_{V_0}^{V_D} dV = \left(\frac{Q}{\epsilon_0 \kappa_0 A} \right) \int_0^D e^{x/D} dx$$

For correctly integrating the equation

1 point

$$[V]_{V_0}^{V_D} = \left(\frac{Q}{\epsilon_0 \kappa_0 A} \right) [De^{x/D}]_0^D$$

$$(V_D - V_0) = \left(\frac{QD}{\epsilon_0 \kappa_0 A} \right) (e^{D/D} - e^0)$$

For an expression that gives the correct absolute value of the potential difference between the plates

1 point

For having the potential difference be positive

1 point

$$\Delta V = \left(\frac{QD}{\epsilon_0 \kappa_0 A} \right) (e - 1)$$

$$\Delta V = \frac{1.72QD}{\epsilon_0 \kappa_0 A}$$

(d) 1 point

Using the equation for capacitance:

$$C = \frac{Q}{\Delta V} = \frac{Q}{\left(\frac{QD}{\epsilon_0 \kappa_0 A} \right) (e - 1)}$$

For an answer consistent with part (c)-ii

1 point

$$C = \frac{\epsilon_0 \kappa_0 A}{D(e - 1)}$$

$$C = \frac{\epsilon_0 \kappa_0 A}{1.72D}$$

2015 SCORING GUIDELINES

Question 1 (continued)

		Distribution of points
(e)	3 points	
	For selecting $U_V > U_C$	1 point
	For correctly comparing the capacitance or the potential difference with the varying dielectric constant to the capacitance or the potential difference with the uniform dielectric constant	1 point
	For correctly comparing the two stored energies consistent with the comparison of the capacitances or potential differences	1 point
	Example: According to the equation from part (d), $C_C > C_V$. Since $U = \frac{Q^2}{2C}$, if the charge stored on the two capacitors is the same, then $U_V > U_C$.	

2015 SCORING GUIDELINES

Question 2

15 points total

Distribution
of points

(a)

i. 2 points

Using Ohm's law:

$$V = IR$$

For a correct application of Kirchhoff's loop rule

$$\mathcal{E} = Ir + IR$$

$$I = \frac{\mathcal{E}}{(r + R)}$$

For a correct expression for the measured voltage across the variable resistor

$$V = \frac{\mathcal{E}}{(r + R)} R$$

1 point

1 point

ii. 1 point

For an expression of $1/V$ as a function of $1/R$ consistent with answer from part


1 point

(a)(i)

$$\frac{1}{V} = \left(\frac{r}{\mathcal{E}}\right) \frac{1}{R} + \frac{1}{\mathcal{E}}$$

(b)

4 points

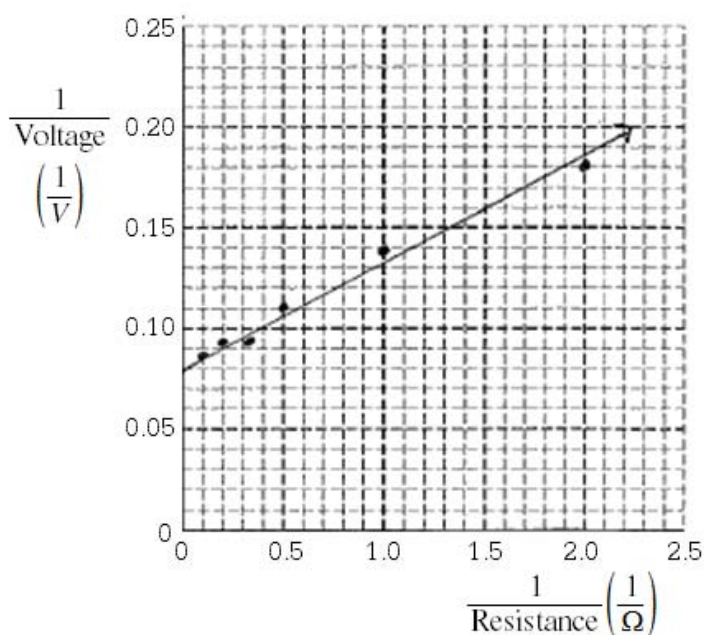

For correctly labeling both axes with variables and units

1 point

For correctly scaling both axes with an acceptable and appropriate scale

1 point

For correctly plotting the data points

1 point

For correctly drawing a straight line that best represents the data

1 point

2015 SCORING GUIDELINES

Question 2 (continued)

Distribution
of points

(c)		
i.	2 points	
	For using a value for the y-intercept consistent with the straight line drawn in part (b)	1 point
	$y = mx + b$	
	$b = 0.080 \text{ 1/V}$	
	For a correct substitution into the equation from part (a)(ii)	1 point
	$\frac{1}{V} = \frac{(r + R)}{\mathcal{E}} \frac{1}{R}$	
	$\frac{1}{V} = \frac{r}{\mathcal{E}} \frac{1}{R} + \frac{1}{\mathcal{E}}$	
	$b = 1/\mathcal{E}$	
	$\mathcal{E} = 1/(0.080 \text{ 1/V})$	
	$\mathcal{E} = 12.5 \text{ V}$	
ii.	2 points	
	For calculating the slope using the straight line from part (b) and not data points	1 point
	$m = \frac{y_2 - y_1}{x_2 - x_1} = \frac{(0.151 - 0.100)}{(1.50 - 0.40)} = 0.0463 \text{ } \Omega/\text{V}$	
	For a correct substitution into equation from part (a)(ii)	1 point
	$m = \frac{r}{\mathcal{E}}$	
	$r = m\mathcal{E}$	
	$r = (0.0463 \text{ } \Omega/\text{V})(12.5 \text{ V})$	
	$r = 0.58 \text{ } \Omega$	
(d)	2 points	
	For using Ohm's law	1 point
	$\mathcal{E} = Ir$	
	For a correct substitution of values from part (c):	1 point
	$(12.5 \text{ V}) = I(0.58 \text{ } \Omega)$	
	$I = 21.6 \text{ A}$	
(e)	2 points	
	For selecting "The voltmeter with high resistance"	1 point
	For a correct justification	1 point
	Example: The voltmeter acts like a resistor in a circuit with the battery. It will	
	measure the potential difference across its own internal resistance. The higher	
	its internal resistance, the closer its potential difference will be to the emf of the	
	battery.	

2015 SCORING GUIDELINES

Question 3

15 points total

Distribution
of points

(a) 3 points

For properly using a correct equation to calculate the magnetic flux

1 point

$$\Phi_B = \int \vec{B} \cdot d\vec{A}$$

For correct substitution of the area and trigonometric function

1 point

$$\Phi_B = BA(\cos\theta) = B\pi r^2(\cos\theta)$$

For correct substitution into the above equation

1 point

$$\Phi_B = 4(1 - 0.2t)\pi(0.10 \text{ m})^2(\cos 60^\circ)$$

$$\Phi_B = 0.063 - 0.013t \quad (\text{or in terms of } a \text{ and } b, \Phi_B = a(1 - bt)(0.016))$$

(b) 2 points

For using a correct equation to solve for the emf

1 point

$$\mathcal{E} = -\frac{d\Phi_B}{dt}$$

Substituting the expression from part (a):

$$\mathcal{E} = \frac{d}{dt}(0.063 - 0.013t)$$

For an answer consistent with part (a)

1 point

$$\mathcal{E} = 0.013 \text{ V}$$

Note: Any sign on the answer is ignored.

(c)
i. 1 point

For a substitution into Ohm's law consistent with the answer from part (b)

1 point

$$V = IR$$

$$I = \frac{(0.013 \text{ V})}{(50 \, \Omega)}$$

$$I = 2.6 \times 10^{-4} \text{ A}$$

ii. 2 points

The correct choice is "Counterclockwise".

For a justification that incorporates that the original magnetic field is changing

1 point

For a justification that correctly relates the induced current to the direction of a new magnetic field created by that current

1 point

Example: Looking down at the loop from P , the vertical component of the magnetic field of the loop is upward and decreasing. To oppose this change, the current in the loop must create a magnetic field that is directed upward at point P .

This requires a counterclockwise current in the loop.

2015 SCORING GUIDELINES

Question 3 (continued)

Distribution
of points

(d) 2 points

For using a correct equation to calculate the energy dissipated

1 point

$$E = Pt = I^2 R t \quad \text{or} \quad E = Pt = (\mathcal{E}^2 / R) t$$

For a substitution into either of the above equations with the answer from part (c)(i) or part (b)

1 point

$$E = (2.6 \times 10^{-4} \text{ A})^2 (50 \, \Omega)(4.0 \text{ s}) \quad \text{or} \quad E = \frac{(0.013 \text{ V})^2}{(50 \, \Omega)} (4.0 \text{ s})$$

$$E = 1.4 \times 10^{-5} \text{ J}$$

(e) 4 points

For selecting both “Zero” for the net magnetic force and “Nonzero” for the Net magnetic torque

1 point

For indicating the forces on directly opposite sides of the loop are in opposite directions

1 point

For concluding that the forces cancel & net force is zero

1 point

For indicating that the torques add & net torque is nonzero

1 point

Example: Since the current changes direction relative to the magnetic field as you go around the loop, the magnetic field will exert force of equal magnitude but opposite direction on opposite sides of the loop. These forces all cancel out resulting in zero net force. However, since this force is up on one side of the loop and down on the other side of the loop, this will create torques that rotate the loop in the same direction. Therefore, the net torque is not zero.

Units 1 point

For correct units on at least two parts with a calculated numerical answer and no incorrect units

1 point