

Question 4

4. A uniform disk and ring, each of mass M and radius R , roll without slipping along a horizontal surface, as shown in Figure 1. The outer edges of the disk and ring are made of the same material. The center of mass of the disk and the center of mass of the ring each initially move with the same constant speed v .

The disk and the ring then smoothly transition to a ramp that is inclined at an angle θ above the horizontal. Both the disk and the ring continue to roll without slipping as they move up the ramp, as shown in Figure 2.

The ring travels a greater distance along the ramp than the disk travels before each momentarily comes to rest.

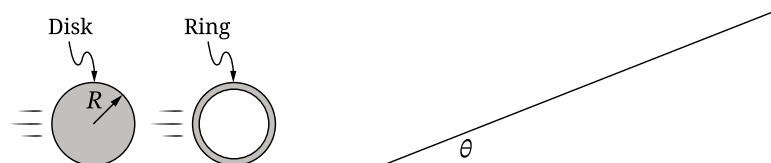


Figure 1

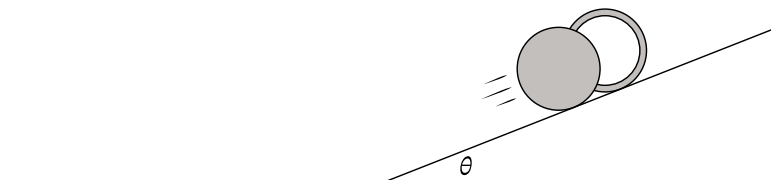


Figure 2

- A. While the disk and the ring are rolling on the ramp without slipping, the magnitudes of the static frictional force exerted on the disk and on the ring by the ramp are f_D and f_R , respectively.

Indicate whether f_D is greater than, less than, or equal to f_R by writing one of the following.

- $f_D > f_R$
- $f_D < f_R$
- $f_D = f_R$

Justify your answer using qualitative reasoning beyond referencing equations.

- B. A cylinder has mass M , radius R , and rotational inertia I about its central axis. The cylinder rolls without slipping up a ramp that is inclined at an angle θ above the horizontal.

Derive an expression for the magnitude of the static frictional force f exerted on the cylinder by the ramp. Express your answer in terms of M , R , I , θ , and physical constants, as appropriate. Begin your derivation by writing a fundamental physics principle or an equation from the reference information.

- C. In a different scenario, the centers of mass of the original disk and ring each have the same initial speed v as they did in the original scenario. The ramp is replaced by a new ramp on which the disk and the ring initially slip as they roll up the new ramp.

Indicate whether the magnitude of the kinetic frictional force exerted on the disk by the new ramp is greater than, less than, or equal to the magnitude of the kinetic frictional force exerted on the ring by the new ramp while both are slipping.

Briefly **justify** your answer.

STOP
END OF EXAM

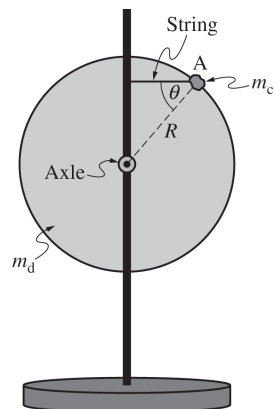

Begin your response to **QUESTION 3** on this page.

Figure 1

Note: Figure not drawn to scale.

3. A uniform disk of radius R and mass m_d is attached to a vertical pole by a horizontal axle that passes through the center of the disk. Friction between the axle and the disk is negligible. A lump of clay of mass m_c is attached to the edge of the disk at Point A. The size of the lump of clay is small compared with the radius of the disk. A horizontal string is connected from the pole to the edge of the disk at Point A. The string makes an angle θ with the line between Point A and the axle, as shown in Figure 1.

- (a) On the following representation of the clay-disk system, **draw** and **label** the external forces (not components) exerted on the system. Each force must be represented by a distinct arrow that starts on, and points away from, the point at which the force is exerted on the system.

**GO ON TO THE NEXT PAGE.**Continue your response to **QUESTION 3** on this page.

- (b) **Derive** an expression for the tension F_T in the string when the clay is at Point A, as shown in Figure 1, in terms of R , m_d , m_c , θ , and physical constants, as appropriate.

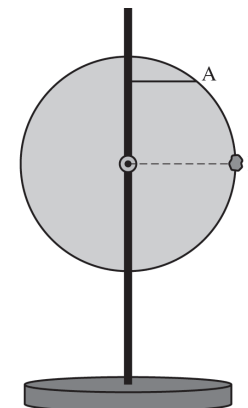


Figure 2

Note: Figure not drawn to scale.

- (c) The string remains connected to the edge of the disk at Point A. The clay is moved to Point B, which is horizontally in line with the axle, as shown in Figure 2. How does the new tension $F_{T, \text{new}}$ compare with tension F_T from part (b)? **Justify** your reasoning.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

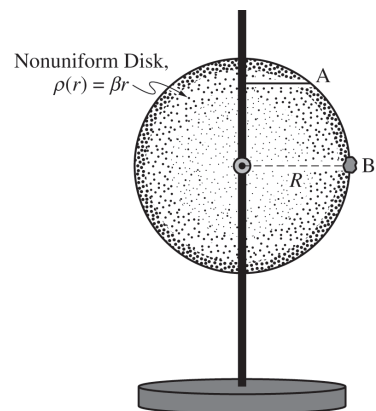


Figure 3

Note: Figure not drawn to scale.

- (d) A nonuniform disk is now attached to the axle. The lump of clay is attached to the disk at Point B, as shown in Figure 3. The clay has mass $m_c = 0.60 \text{ kg}$ and the disk has a radius $R = 0.30 \text{ m}$. The mass density of the disk varies radially and can be modeled by $\rho(r) = \beta r$, where r is the radial distance from the axle and $\beta = 4.0 \text{ kg/m}^3$.
- Calculate** the rotational inertia of the disk about the axle.

- The string connecting the disk to the pole is cut. **Calculate** the magnitude of the initial angular acceleration of the clay-disk system.

GO ON TO THE NEXT PAGE.

STOP

END OF EXAM

Continue your response to Question 3 on this page.

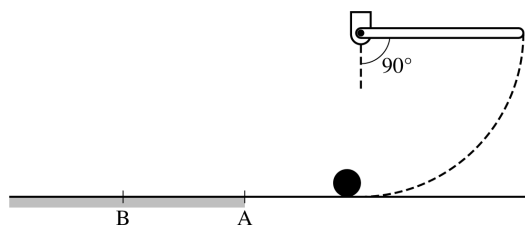
Note: Figure not drawn to scale.

Figure 1

3. A system consists of a small sphere of mass m and radius R at rest on a horizontal surface and a uniform rod of mass $M = 2m$ and length ℓ attached at one end to a pivot with negligible friction, where $R \ll \ell$. There is negligible friction between the surface and the sphere to the right of Point A and nonnegligible friction to the left of Point A. The rod is held horizontally as shown in Figure 1, then is released from rest. The total rotational inertia of the rod about the pivot is $\frac{1}{3}M\ell^2$ and the rotational inertia of the sphere about its center is $\frac{2}{5}mR^2$. After the rod is released, the rod swings down and strikes the sphere head-on. As a result of this collision, the rod is stopped, and the ball initially slides without rotating to the left across the horizontal surface.

- (a) Derive an expression for the angular speed of the rod just before striking the sphere in terms of the length ℓ and physical constants as appropriate.

GO ON TO THE NEXT PAGE.

Continue your response to Question 3 on this page.

- (b) Derive an expression for the linear speed v_0 of the sphere immediately after colliding with the rod in terms of the length ℓ and physical constants as appropriate.

After sliding a short distance, at time $t = 0$ the sphere encounters a region of the horizontal surface with a coefficient of kinetic friction μ , beginning at Point A as indicated in Figure 1. The sphere begins rotating while sliding and eventually begins rolling without sliding at Point B, also as indicated.

- (c) In the following diagram, which represents the sphere while the sphere is traveling between Points A and B, draw and label the forces (not components) that act on the sphere. Each force must be represented by a distinct arrow starting on, and pointing away from, the point of application on the sphere.



- (d) Derive an expression for each of the following as the sphere is rotating and sliding between points A and B in terms of v_0 , μ , R , t , and physical constants as appropriate.

- i. The linear velocity v of the center of mass of the sphere as a function of time t

- ii. The angular velocity ω of the sphere as a function of time t

GO ON TO THE NEXT PAGE.

Name:

Continue your response to **QUESTION 3** on this page.

- (e)
- i. Derive an expression for the time it takes the sphere to travel from Point A to Point B in terms of v_0 , μ , and physical constants as appropriate.
- ii. Derive an expression for the linear velocity of the sphere upon reaching Point B in terms of v_0 .

GO ON TO THE NEXT PAGE.

STOP

END OF EXAM




Figure 1

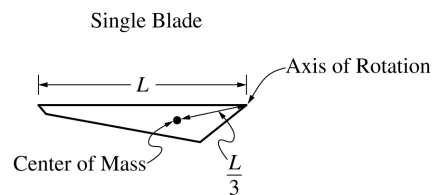


Figure 2

A wind turbine includes a three-blade system that rotates about an axis through the end of each blade, as shown in Figure 1. Each blade has a length L and mass M , with a center of mass located at a distance $\frac{L}{3}$ from the axis of rotation, as shown in Figure 2.

- (a) Derive an expression for the rotational inertia of the three-blade system. Express your answer in terms of M , L , and physical constants, as appropriate. The rotational inertia of each blade about an axis through its center of mass is given by the equation $I_{\text{cm}} = \frac{1}{18} ML^2$.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

- (b) While the wind blows, the three-blade system operates at a constant angular speed $\omega_0 = 2.6$ rad/s. The length of one blade is $L = 36$ m. The numerical value of the rotational inertia of the system is $I_{\text{sys}} = 6.7 \times 10^6 \text{ kg}\cdot\text{m}^2$. Calculate the time T it takes the outer edge of a single blade to complete one revolution.

- (c) When the wind stops blowing, the angular speed of the system decreases. The angular speed ω of the system while slowing down is given as a function of time t by the equation $\omega = \omega_0 e^{-\beta_0 t}$, where β_0 is a constant with appropriate units, as shown on the graph in Figure 3.

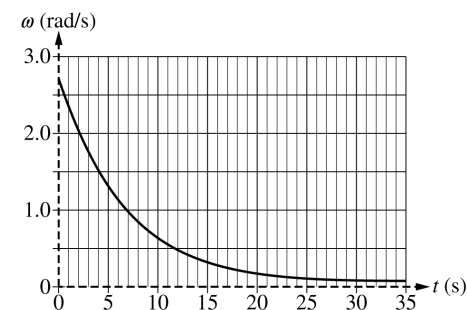


Figure 3

- i. Calculate the amount of energy dissipated from $t = 0$, when the wind stops blowing, until the system comes to rest.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTIONS** on this page.

- ii. Derive an expression for the net torque exerted on the system as a function of t as the system slows down. Express your answers in terms of β_0 , ω_0 , M , L , I_{sys} , and physical constants, as appropriate.

- iii. Derive an expression for the angular displacement of the system $\Delta\theta$ as a function of t . Express your answer in terms of β_0 , ω_0 , M , L , I_{sys} , and physical constants, as appropriate.

The three-blade system is now replaced with a second three-blade system identical to the first, except that the second three-blade system slows down according to the equation $\omega = \omega_0 e^{-\beta t}$, where $\omega_0 = 2.6 \text{ rad/s}$ and $\beta > \beta_0$. The original angular speed function is shown as a dashed line in Figure 4.


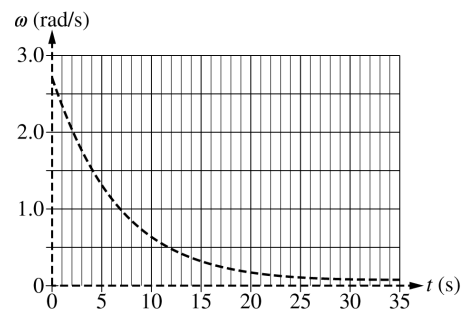


Figure 4

- (d) On the graph in Figure 4, sketch the angular speed of the second three-blade system as a function of time t .

GO ON TO THE NEXT PAGE.**STOP****END OF EXAM**

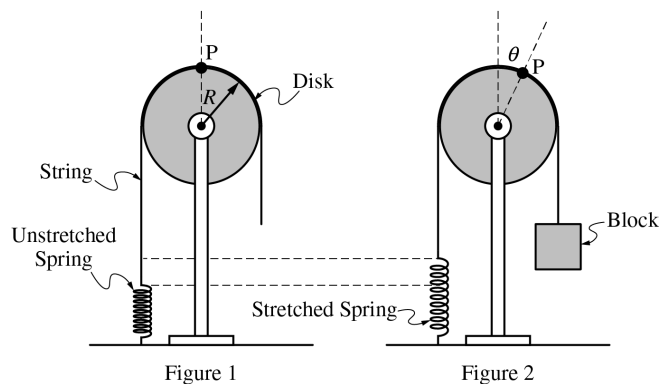

Note: Figures not drawn to scale.

A solid uniform disk is supported by a vertical stand. The disk is able to rotate with negligible friction about an axle that passes through the center of the disk. The mass and radius of the disk are given by M_d and R , respectively. The rotational inertia of the disk is $I_d = \frac{1}{2} M_d R^2$. A string of negligible mass is draped over the disk and attached to the top of the disk at point P. One end of the string is connected to an unstretched ideal spring of spring constant k , which is fixed to the ground as shown in Figure 1.

A block of mass m_B is then attached to the string on the right side of the disk. The block is slowly lowered until the spring-disk-block system reaches equilibrium, as shown in Figure 2. In this equilibrium position, the disk has rotated clockwise through a small angle θ .


Give all algebraic answers in terms of M_d , R , k , θ , and physical constants, as appropriate.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

(a) Derive an expression for the mass m_B of the block.

(b) At time $t = 0$, the string on the right side of the disk is cut and the block falls to the ground. On the circle below, which represents the disk, draw and label the forces (not components) that act on the disk immediately after the string is cut and the block is falling to the ground. Each force should be represented by an arrow that starts on and is directed away from the point of application.




(c) Derive an expression for the angular acceleration α of the disk immediately after the string is cut.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

- (d) At $t = t_1$, the disk has rotated and point P is again directly above the axle. Sketch a graph of the magnitude of the angular velocity ω of the disk as a function of time t from $t = 0$ to $t = t_1$.

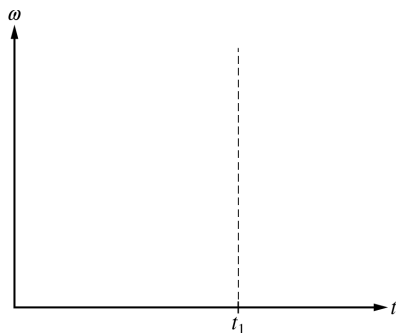

GO ON TO THE NEXT PAGE.

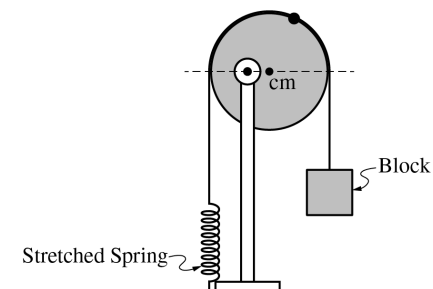
Continue your response to **QUESTION 3** on this page.

Figure 3

Note: Figure not drawn to scale.

- (e) The disk is adjusted on the support so that the axle does not pass through the center of mass of the disk. The block is again hung on the right side of the disk and the spring-disk-block system comes to equilibrium, as shown in Figure 3. The axle does not exert a torque on the disk. For each force on the disk, indicate whether the magnitude of the torque about the axle caused by that force increases, decreases, or stays the same relative to part (b).

GO ON TO THE NEXT PAGE.

STOP

END OF EXAM

Begin your responses to questions on this page.

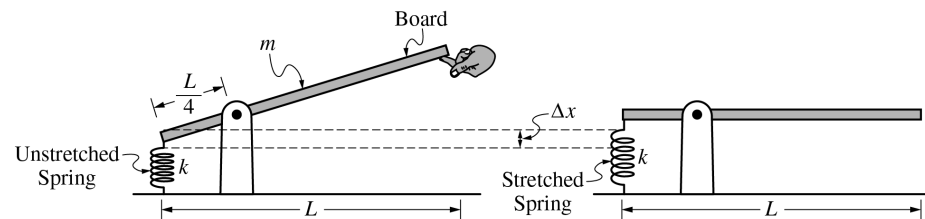



Figure 1

Figure 2

Note: Figures not drawn to scale.

A uniform board of length L and mass m is attached to a pivot $\frac{L}{4}$ from the left end of the board. The left end of the board is attached to an ideal spring of spring constant k that is attached to the ground. The right end of the board is initially held by a student so that the spring is unstretched, as shown in Figure 1. The student slowly lowers and then releases the board. The board remains at rest in the horizontal position, with the spring stretched, as shown in Figure 2. The rotational inertia of the board about the pivot is I .

- (a) On the rectangle below, which represents the board, draw and label the forces (not components) that act on the board while the board-spring system is in equilibrium. Each force should be represented by an arrow that starts on, and points away from, the board, and should represent the location at which that force acts.

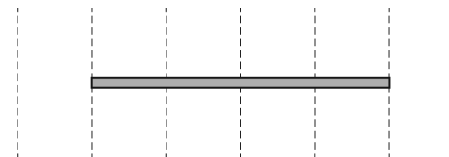


GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

- (b) Derive an expression for the distance the spring stretches, Δx , when the board is in equilibrium. Express your answer in terms of k , L , m , and physical constants, as appropriate.


GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

Note: Figure not drawn to scale.

- (c) A student pushes the board down on the right side, stretching the spring a new distance Δx_2 from the unstretched position. The board is held at a small angle θ_0 with the horizontal, as shown. The student then releases the board from rest.

- i. At time $t = 0$, the board is released. At $t = t_1$, the board first crosses the horizontal. Sketch a graph of the magnitude of the angular acceleration α of the board as a function of time t from $t = 0$ to $t = t_1$.

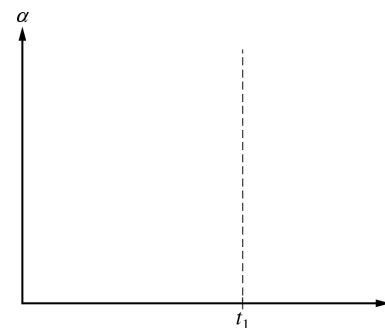


GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

- ii. Derive an expression for the angular acceleration α_0 of the board immediately after the board is released. Express your answer in terms of k , L , m , I , Δx_2 , θ_0 , and physical constants, as appropriate.

GO ON TO THE NEXT PAGE.

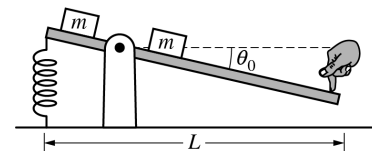Continue your response to **QUESTION 3** on this page.Note: Figure not drawn to scale.

- (d) Two blocks of equal mass m are attached to the board equal distances from the pivot point, as shown. The board is again pushed down on the right side so that the spring stretches the same distance Δx_2 as in part (c). The board is then released. How does the new angular acceleration α' when the blocks are attached compare to the angular acceleration α_0 from part (c) ?

___ $\alpha' > \alpha_0$ ___ $\alpha' < \alpha_0$ ___ $\alpha' = \alpha_0$


Justify your answer.

GO ON TO THE NEXT PAGE.

STOP

END OF EXAM

Begin your response to QUESTIONS on this page.



3. A triangular rod of length L and mass M has a nonuniform linear mass density given by the equation $\lambda = \gamma x^2$, where $\gamma = \frac{3M}{L^3}$ and x is the distance from point P at the left end of the rod.

(a) Using integral calculus, show that the rotational inertia I of the rod about an axis perpendicular to the page and through point P is $\frac{3}{5}ML^2$.

(b) Determine the horizontal location of the center of mass of the rod relative to point P . Express your answer in terms of L .


(c) For an axis perpendicular to the page, is the value of the rotational inertia of the rod around point P greater than, less than, or equal to the value of the rotational inertia of the rod around the rod's center of mass?

_____ Greater than _____ Less than _____ Equal to

Justify your answer.

The rod is released from rest in the position shown, and the rod begins to rotate about a horizontal axis perpendicular to the page and through point P.

(d) On the axes below, sketch graphs of the magnitude of the net torque τ on the rod and the angular speed ω of the rod as functions of time t from the time the rod is released until the time its center of mass reaches its lowest point.

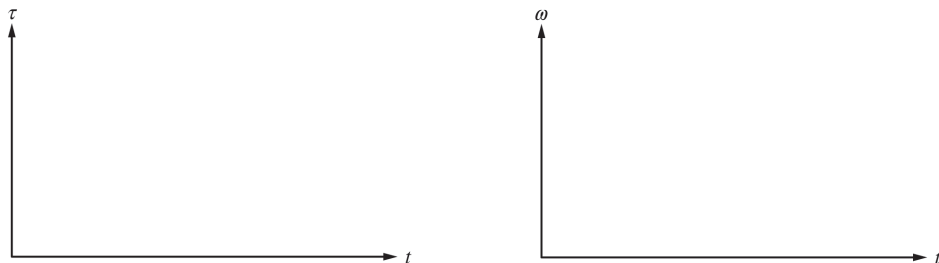


(e) As the rod rotates from the horizontal position down through vertical, is the magnitude of the angular acceleration on the rod increasing, decreasing, or not changing?

_____ Increasing _____ Decreasing _____ Not changing

Justify your answer.

GO ON TO THE NEXT PAGE.


Use a pencil or pen with black or dark blue ink only. Do NOT write your name. Do NOT write outside the box.



(f) The mass of the rod is 3.0 kg, and the length of the rod is 1.0 m. Calculate the linear speed v of point S as the rod swings through the vertical position shown.


GO ON TO THE NEXT PAGE.

Use a pencil or pen with black or dark blue ink only. Do NOT write your name. Do NOT write outside the box.

STOP**END OF EXAM**

2. Object A is a long, thin, uniform rod of mass M and length $2L$ that is free to rotate about a pivot of negligible friction at its left end, as shown above.

(a) Using integral calculus, derive an expression to show that the rotational inertia I_A of object A about the pivot is given by $\frac{4}{3}ML^2$.

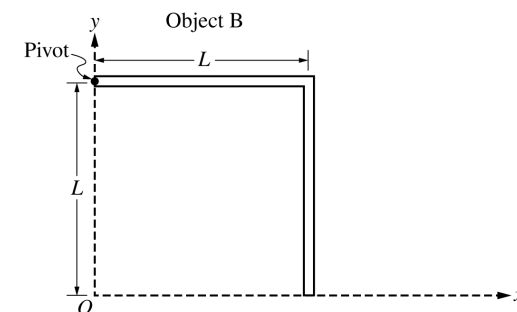

Object B of total mass M is formed by attaching two thin, uniform, identical rods of length L at a right angle to each other. Object B is held in place, as shown above. Express your answers in part (b) in terms of L .

(b) Determine the following for the given coordinate system shown in the figure.

- The x -coordinate of the center of mass of object B
- The y -coordinate of the center of mass of object B

GO ON TO THE NEXT PAGE.

Use a pencil or pen with black or dark blue ink only. Do NOT write your name. Do NOT write outside the box.

Object B has a rotational inertia of I_B about its pivot.


(c) Is the value of I_B greater than, less than, or equal to I_A ?

_____ Greater than _____ Less than _____ Equal to

Justify your answer.


Object B is released from rest and begins to rotate about its pivot.

(d) On the axes below, sketch graphs of the magnitude of the angular acceleration α and the angular speed ω of object B as functions of time t from the time it is released to the time its center of mass reaches its lowest point.

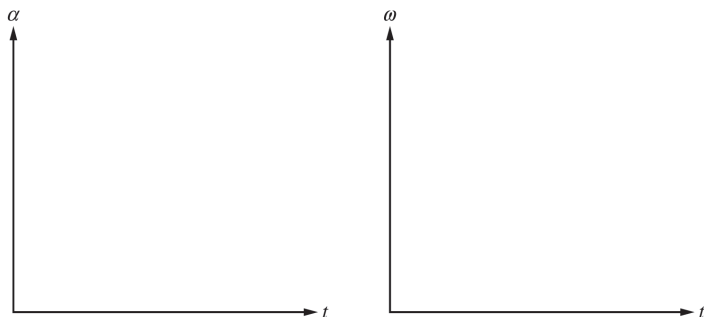

GO ON TO THE NEXT PAGE.


Use a pencil or pen with black or dark blue ink only. Do NOT write your name. Do NOT write outside the box.



(e) While object B rotates from the horizontal position down through the angle θ shown above, is the magnitude of its angular acceleration increasing, decreasing, or not changing?

_____ Increasing _____ Decreasing _____ Not changing

Justify your answer.




Object B rotates through the position shown above.

(f) Derive an expression for the angular speed of object B when it is in the position shown above. Express your answer in terms of M , L , I_B , and physical constants, as appropriate.


GO ON TO THE NEXT PAGE.

Use a pencil or pen with black or dark blue ink only. Do NOT write your name. Do NOT write outside the box.

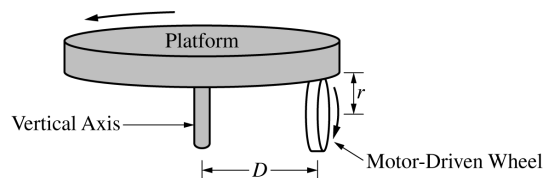

3. A horizontal circular platform with rotational inertia I_p rotates freely without friction on a vertical axis. A small motor-driven wheel that is used to rotate the platform is mounted under the platform and touches it. The wheel has radius r and touches the platform a distance D from the vertical axis of the platform, as shown above. The platform starts at rest, and the wheel exerts a constant horizontal force of magnitude F tangent to the wheel until the platform reaches an angular speed ω_p after time Δt . During time Δt , the wheel stays in contact with the platform without slipping.


- Derive an expression for the angular speed ω_p of the platform. Express your answer in terms of I_p , r , D , F , Δt , and physical constants, as appropriate.
- Determine an expression for the kinetic energy of the platform at the moment it reaches angular speed ω_p . Express your answer in terms of I_p , r , D , F , Δt , and physical constants, as appropriate.
- Derive an expression for the angular speed of the wheel ω_w when the platform has reached angular speed ω_p . Express your answer in terms of D , r , ω_p , and physical constants, as appropriate.



When the platform is spinning at angular speed ω_p , the motor-driven wheel is removed. A student holds a disk directly above and concentric with the platform, as shown above. The disk has the same rotational inertia I_p as the platform. The student releases the disk from rest, and the disk falls onto the platform. After a short time, the disk and platform are observed to be rotating together at angular speed ω_f .

- Derive an expression for ω_f . Express your answer in terms of ω_p , I_p , and physical constants, as appropriate.

A student now uses the rotating platform ($I_p = 3.1 \text{ kg}\cdot\text{m}^2$) to determine the rotational inertia I_U of an unknown object about a vertical axis that passes through the object's center of mass. The platform is rotating at an initial angular speed ω_i when the unknown object is dropped with its center of mass directly above the center of the platform. The platform and object are observed to be rotating together at angular speed ω_f . Trials are repeated for different values of ω_i . A graph of ω_f as a function of ω_i is shown on the axes below.

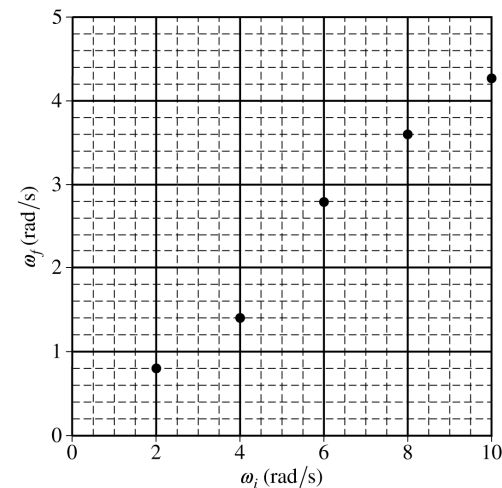

(e)

- i. On the graph on the previous page, draw a best-fit line for the data.
- ii. Using the straight line, calculate the rotational inertia of the unknown object I_U about a vertical axis passing through its center of mass.

- (f) The kinetic energy of the spinning platform before the object is dropped on it is K_i . The total kinetic energy of the platform-object system when it reaches angular speed ω_f is K_f . Which of the following expressions is true?

_____ $K_f < K_i$ _____ $K_f = K_i$ _____ $K_f > K_i$

Justify your answer.

- (g) One of the students observes that the center of mass of the object is not actually aligned with the axis of the platform. Is the experimental value of I_U obtained in part (e) greater than, less than, or equal to the actual value of the rotational inertia of the unknown object about a vertical axis that passes through its center of mass?

_____ Greater than _____ Less than _____ Equal to

Justify your answer.

STOP

END OF EXAM

3. A triangular rod, shown above, has length L , mass M , and a nonuniform linear mass density given by the equation $\lambda = \frac{2M}{L^2}x$, where x is the distance from one end of the rod.

- (a) Using integral calculus, show that the rotational inertia of the rod about its left end is $ML^2/2$.




Figure 1




Figure 2


The thin hoop shown above in Figure 1 has a mass M , radius L , and a rotational inertia around its center of ML^2 . Three rods identical to the rod from part (a) are now fastened to the thin hoop, as shown in Figure 2 above.

- (b) Derive an expression for the rotational inertia I_{tot} of the hoop-rods system about the center of the hoop.

Express your answer in terms of M , L , and physical constants, as appropriate.

The hoop-rods system is initially at rest and held in place but is free to rotate around its center. A constant force F is exerted tangent to the hoop for a time Δt .


- (c) Derive an expression for the final angular speed ω of the hoop-rods system. Express your answer in terms of M , L , F , Δt , and physical constants, as appropriate.

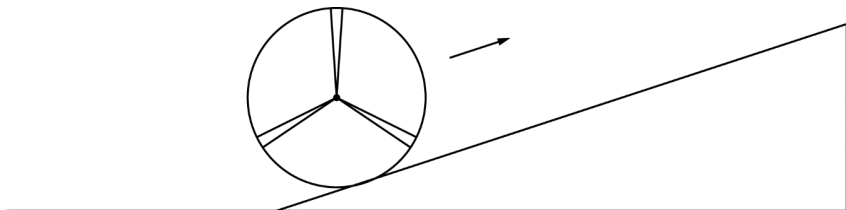

The hoop-rods system is rolling without slipping along a level horizontal surface with the angular speed ω found in part (c). At time $t = 0$, the system begins rolling without slipping up a ramp, as shown in the figure above.

(d)

- i. On the figure of the hoop-rods system below, draw and label the forces (not components) that act on the system. Each force must be represented by a distinct arrow starting at, and pointing away from, the point at which the force is exerted on the system.



- ii. Justify your choice for the direction of each of the forces drawn in part (d)i.

- (e) Derive an expression for the change in height of the center of the hoop from the moment it reaches the bottom of the ramp until the moment it reaches its maximum height. Express your answer in terms of M , L , I_{tot} , ω , and physical constants, as appropriate.

STOP

END OF EXAM