



AP[®] Physics C: Mechanics 2011 Scoring Guidelines

AP[®] PHYSICS C: MECHANICS 2011 SCORING GUIDELINES

Question 1

15 points total

Distribution
of points

(a) 2 points

$$\mathbf{J} = \int \mathbf{F} dt$$

For a correct equation relating the given force, time and impulse

1 point

$$J_p = F_{avg} \Delta t$$

For the correct answer

1 point

$$\Delta t = J_p / F_{avg}$$

Alternate solution

*Alternate points
1 point*

For using both kinematics and Newton's second law

$$v_x = 0 + a_{avg} \Delta t$$

$$\mathbf{F}_{avg} = m \mathbf{a}_{avg}$$

Combining the above equations

$$F_{avg} = m \left(\frac{v_x}{\Delta t} \right)$$

$$F_{avg} \Delta t = m v_x = J_p$$

For the correct answer

1 point

$$\Delta t = J_p / F_{avg}$$

(b) 2 points

For the correct relationship between impulse and the change in momentum

1 point

$$\mathbf{J} = \Delta \mathbf{p} = m \Delta \mathbf{v}$$

$$J_p = m(v_x - 0) = m v_x$$

For the correct answer

1 point

$$m = J_p / v_x$$

Note: A correct kinematics and Newton's laws approach is also acceptable.

The College Board

The College Board is a not-for-profit membership association whose mission is to connect students to college success and opportunity. Founded in 1900, the College Board is composed of more than 5,700 schools, colleges, universities and other educational organizations. Each year, the College Board serves seven million students and their parents, 23,000 high schools, and 3,800 colleges through major programs and services in college readiness, college admission, guidance, assessment, financial aid and enrollment. Among its widely recognized programs are the SAT[®], the PSAT/NMSQT[®], the Advanced Placement Program[®] (AP[®]), SpringBoard[®] and ACCUPLACER[®]. The College Board is committed to the principles of excellence and equity, and that commitment is embodied in all of its programs, services, activities and concerns.

© 2011 The College Board. College Board, ACCUPLACER, Advanced Placement Program, AP, AP Central, SAT, SpringBoard and the acorn logo are registered trademarks of the College Board. Admitted Class Evaluation Service is a trademark owned by the College Board. PSAT/NMSQT is a registered trademark of the College Board and National Merit Scholarship Corporation. All other products and services may be trademarks of their respective owners. Permission to use copyrighted College Board materials may be requested online at: www.collegeboard.com/inquiry/cbpermit.html.

Visit the College Board on the Web: www.collegeboard.org.

AP Central is the official online home for the AP Program: apcentral.collegeboard.com

**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 1 (continued)

(c) 3 points

For using the work-energy theorem
 $W = \Delta K$

$$W = 0 - \frac{1}{2}mv_x^2$$

For substituting the expression for m from part (b)

$$W = -\frac{1}{2}\frac{J_p}{v_x}v_x^2$$

$$W = -\frac{1}{2}J_p v_x$$

For an indication that the work done is negative

Alternate Solution

Using kinematics and Newton's second law to determine the average net force

$$v_f^2 - v_i^2 = 2a_{avg}d$$

$$-v_x^2 = 2a_{avg}d$$

$$a_{avg} = -\frac{v_x^2}{2d}$$

$$\mathbf{F}_{avg} = m\mathbf{a}_{avg}$$

$$F_{net} = m\left(-\frac{v_x^2}{2d}\right)$$

For substituting this expression for the force into the equation for work

$$W = \int \mathbf{F} \cdot d\mathbf{r} = F_{avg}d = m\left(-\frac{v_x^2}{2d}\right)d$$

$$W = -m\frac{v_x^2}{2}$$

For substituting the expression for m from part (b)

$$W = -\frac{J_p}{v_x}\frac{v_x^2}{2}$$

$$W = -\frac{1}{2}J_p v_x$$

For an indication that the work done is negative

**Distribution
of points**

1 point

1 point

1 point

Alternate points

1 point

1 point

1 point

**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 1 (continued)

**Distribution
of points**

(d) 2 points

$$W = \int \mathbf{F} \cdot d\mathbf{r} = \mathbf{F}_{avg} \cdot \mathbf{r}$$

For using F_b as the average force in the equation for work

$$W = F_b d$$

$$F_b = \frac{W}{d}$$

For substituting the expression for W from part (c), with or without a negative sign

$$F_b = \frac{J_p v_x}{2d}$$

(e) 4 points

Applying the work-energy relationship

$$K_i + W = K_f$$

For correctly relating the initial kinetic energy of the projectile with the work done by the block on the projectile and the work done on the block by friction with the table

$$K_i + W_{block} + W_{friction} = 0$$

For substituting for the work done by the block on the projectile (i.e., the energy lost to heat in the block-projectile collision)

$$K_i - F_b d_n + W_{friction} = 0$$

For substituting the work done on the block by friction with the table (i.e., the energy lost to heat as the block slides to rest on the table)

$$K_i - F_b d_n - f_T D = 0$$

The initial kinetic energy of the projectile is the same as in the first case when the block was clamped. Therefore, it can be equated to the work done in stopping the projectile from part (d).

For substituting $F_b d$ for the initial kinetic energy of the block

$$F_b d - F_b d_n - f_T D = 0$$

$$F_b d_n = F_b d - f_T D$$

Full credit could not be earned for just writing this equation. The student needed to have some indication that the work-energy relationship was being applied, and that F_d was associated with the initial kinetic energy.

$$d_n = \frac{F_b d - f_T D}{F_b}$$

$$d_n = d - \frac{f_T}{F_b} D$$

1 point

1 point

1 point

1 point

1 point

1 point

**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 1 (continued)

(f) 2 points

For a correct application of conservation of momentum to the block-projectile collision

$$mv_x = (M + m)V$$

$$V = \frac{m}{(M + m)}v_x$$

The kinetic energy of the block/projectile system immediately after the collision is equal to the work done by friction in stopping it.

$$\frac{1}{2}(M + m)V^2 = f_T D$$

For substituting for V

$$\frac{1}{2}(M + m)\left(\frac{m}{(M + m)}v_x\right)^2 = f_T D$$

$$\frac{1}{2}\frac{m^2 v_x^2}{(M + m)} = f_T D$$

$$\frac{m}{M + m}\left(\frac{1}{2}mv_x^2\right) = f_T D$$

From part (c) the kinetic energy factor in the equation above is equal to the total work done. From part (d) that work is equal to $F_b d$.

$$\frac{m}{M + m}F_b d = f_T D$$

Using the expression $F_b d_n = F_b d - f_T D$ from part (e) to substitute for $f_T D$

$$\frac{m}{M + m}F_b d = F_b d - F_b d_n$$

$$\frac{m}{M + m}d = d - d_n$$

$$d_n = d\left(1 - \frac{m}{M + m}\right)$$

Note: Because the work for parts (e) and (f) is interrelated, the two parts are scored as a whole. Credit is earned for work related to part (f) even when it is shown in part (e) and vice versa.

**Distribution
of points**

1 point


1 point

**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 2

15 points total

(a) 2 points



For either a weight force or a normal force, correctly drawn and labeled
For the second correct force and no additional forces, arrows or components

**Distribution
of points**

1 point

1 point

(b) 1 point

For a correct expression for the centripetal force in terms of the forces drawn in part (a)
For the example above:

$$F_c = F_N - Mg \sin q$$

1 point

Alternate Solution

Applying conservation of energy, with the loss of potential energy equal to the kinetic energy at point C

$$Mg Dh = Mu_C^2/2$$

$$u_C^2 = 2g Dh$$

$$Dh = 3R/4 + R \sin q$$

$$u_C^2 = 2g(3R/4 + R \sin q)$$

$$F_c = Mu_C^2/R$$

$$F_c = M(2g(3R/4 + R \sin q))/R$$

For a correct answer

$$F_c = 2Mg(3/4 + \sin q)$$

Alternate points

1 point

(c) 2 points

For applying conservation of energy, with the loss of potential energy equal to the kinetic energy at point D

$$Mg Dh = Mu_D^2/2$$

$$u_D^2 = 2g Dh$$

$$Dh = 3R/4 + R = 7R/4$$

$$u_D^2 = 2g(7R/4)$$

For a correct answer

$$u_D = \sqrt{(7/2)gR}$$

1 point

1 point

**AP[®] PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 2 (continued)

(d) 3 points

Work-energy approach

For equating the work done by the friction force to the kinetic energy of the compartment at point D

$$W = \Delta K = 0 - \frac{1}{2} M u_D^2$$

For a correct expression for the frictional force

$$f = n\bar{N} = nMg$$

$$W = \mathbf{F} \cdot \mathbf{Dr} = fd \cos 180 = -(nMg)d$$

$$(nMg)d = \frac{1}{2} M u_D^2$$

For substituting the expression for u_D from part (c), and $d = 3R$

$$(nMg)3R = \frac{1}{2} M \left(\frac{7}{2} gR \right)$$

$$3m = \frac{1}{2} \left(\frac{7}{2} \right)$$

$$m = 7/12$$

Note: Full credit is also earned for setting the initial potential energy at point A,

$$U_A = mg \left(\frac{7R}{4} \right), \text{ equal to the work done by the frictional force, and solving for } m.$$

Alternate solution

For using both Newton's second law and a correct kinematics equation

$$\mathbf{F}_{\text{net}} = m\mathbf{a}$$

$$u_f^2 - u_i^2 = 2ad$$

For a correct expression for the frictional force

$$f = n\bar{N} = nMg$$

$$-nMg = Ma$$

$$a = -ng$$

Substituting for a , and the final and initial speeds in the kinematic equation

$$-u_D^2 = 2(-ng)d$$

For substituting the expression for u_D from part (c), and $d = 3R$

$$\frac{7}{2} gR = 2(ng)3R$$

$$m = 7/12$$

**Distribution
of points**

1 point

1 point

1 point

Alternate points

1 point

1 point

1 point

**AP[®] PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 2 (continued)

**Distribution
of points**

(e)

i. 2 points

$$\Sigma F = ma$$

For substituting the braking force into Newton's second law as the net force

For substituting the time derivative of velocity for the acceleration

$$-ku = M(du/dt)$$

ii. 2 points

For separating the variables and integrating

$$du/u = -(k/M) dt$$

$$\int_{u_D}^u du/u = -(k/M) \int_0^t dt$$

$$\ln u|_{u_D}^u = -(k/M)t$$


$$\ln u - \ln u_D = \ln(u/u_D) = -(k/M)t$$

$$u/u_D = e^{-kt/M}$$

For a correct expression for the velocity as a function of time

$$u = u_D e^{-kt/M}$$

iii. 3 points

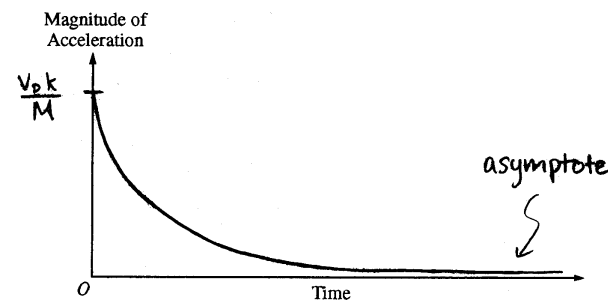

Taking the derivative of the equation for u from part (e) ii

$$a = du/dt = d(u_D e^{-kt/M})/dt = -(k/M)u_D e^{-kt/M}$$

$$\text{At } t = 0, a = -ku_D/M$$

For a graph with a finite intercept on the vertical axis

For a graph that is concave upward and asymptotic to zero

For labeling the initial acceleration with the correct value

1 point

1 point

1 point

1 point

1 point

1 point

1 point

**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 3

15 points total

**Distribution
of points**

(a) 3 points

For a statement of Newton's second law for rotation

$$\Sigma \tau = I\alpha$$

For substituting the given torque expression for the net torque $\Sigma \tau$

$$I\alpha = -\beta\theta$$

For substituting the second derivative of angular position for angular acceleration

$$I \frac{d^2\theta}{dt^2} = -\beta\theta$$

1 point

1 point

1 point

(b) 3 points

Applying Newton's second law for translation to a mass on a spring gives

$$m \frac{d^2x}{dt^2} = -kx, \text{ and } \omega = \sqrt{\frac{k}{m}}.$$

For this torsion pendulum, $I \frac{d^2\theta}{dt^2} = -\beta\theta$.

Comparing differential equations, I is analogous to m and β is analogous to k .

For the correct expression for ω

$$\omega = \sqrt{\frac{\beta}{I}}$$

For the correct relationship between ω and T

$$T = \frac{2\pi}{\omega}$$

For the correct answer

$$T = 2\pi \sqrt{\frac{I}{\beta}}$$

1 point

1 point

1 point

Alternate Solution

The period of a mass on a spring is $T = 2\pi \sqrt{\frac{m}{k}}$.

For recognizing that I is analogous to m

For recognizing that β is analogous to k

For the correct answer

$$T = 2\pi \sqrt{\frac{I}{\beta}}$$

Alternate points

1 point

1 point

1 point


**AP® PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 3 (continued)

**Distribution
of points**

(c) 2 points

Sample graph

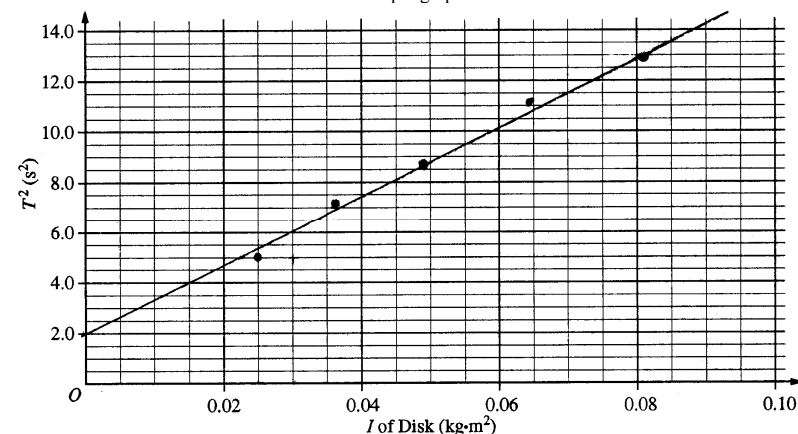

For correctly plotting the data

For drawing a reasonable, best-fit straight line

Note: For correctly plotted data, a reasonable, best-fit straight line does NOT pass through the origin.

1 point

1 point

(d) 3 points

The general equation for a straight line is $y(x) = mx + b$, where m is the slope and b is the y-intercept.

$$T^2 = mI + b$$

$$m = \Delta(T^2) / \Delta I$$

For using two points from the best-fit line to calculate the slope

$$\text{Example from the graph shown: } m = \frac{(11.5 \text{ s}^2 - 2.0 \text{ s}^2)}{(0.07 \text{ kg}\cdot\text{m}^2 - 0.00 \text{ kg}\cdot\text{m}^2)}$$

1 point

$$m = 135 \text{ s}^2/\text{kg}\cdot\text{m}^2$$

For an intercept calculated or directly read from the graph

$$b = 2.0 \text{ s}^2$$

For using the variables T^2 and I in the equation

$$T^2 = (135 \text{ s}^2/\text{kg}\cdot\text{m}^2)I + 2.0 \text{ s}^2$$

1 point

1 point

**AP[®] PHYSICS C: MECHANICS
2011 SCORING GUIDELINES**

Question 3 (continued)

**Distribution
of points**

(e) 3 points

Using the equation from part (b)

$$T = 2\pi\sqrt{\frac{I}{\beta}}$$

$$T^2 = 4\pi^2 \frac{I}{\beta} = \frac{4\pi^2}{\beta} I$$

For comparing this to part (d) and noting that $\frac{4\pi^2}{\beta}$ is the slope of the line

1 point

$$\frac{4\pi^2}{\beta} = m$$

For using the value of the slope determined in part (d)

1 point

$$\beta = \frac{4\pi^2}{m} = \frac{4\pi^2}{135 \text{ s}^2/\text{kg}\cdot\text{m}^2}$$

$$\beta = 0.292 \text{ kg}\cdot\text{m}^2/\text{s}^2$$

For the correct units on the numerical answer

1 point

(f) 1 point

For a correct physical explanation for the intercept that mentions the effect of the flexible rod

1 point

Example: The intercept is the square of the period of oscillation of the flexible rod.