

11.2.3 WHILE and REPEAT loops, and choosing the right loop

Name: _____ Class: _____ Date: _____

Total: 47 marks

KEY WORDS pre-condition 前测 • post-condition 后测 • validation 验证

• rogue value 结束标志值 • iteration 迭代

Objective

Learn the two **condition-controlled loops** 条件循环: the **pre-condition** 前测 loop WHILE ... ENDWHILE and the **post-condition** 后测 loop REPEAT ... UNTIL. They repeat when the number of passes is **not known** in advance. You also learn to choose the right loop for a problem and to justify the choice. Sheet 11.2.2 taught the FOR loop; sheet 11.2.4 then traces loops with a trace table.

You must be able to:

- write a pre-condition loop and a post-condition loop
- rewrite one kind of loop as another
- use a loop to check an input (**validation** 验证), and to stop at a **rogue value** 结束标志值
- justify why one loop structure suits a problem better than the others

1 Worked examples

Study these first. Each one shows a **method** that a question later on this sheet needs.

■ Three loops, one task

Each of these outputs the numbers 1 to 5.

```
FOR Count ← 1 TO 5
  OUTPUT Count
NEXT Count
```

```
Count ← 1
WHILE Count <= 5
  OUTPUT Count
  Count ← Count + 1
ENDWHILE
```


```

Count ← 1
REPEAT
    OUTPUT Count
    Count ← Count + 1
UNTIL Count > 5

```

- A **FOR** loop sets, tests and increases its counter for you. The other two loops need all three steps written out: set the counter **before** the loop, change it **inside** the loop, and test it.
- **WHILE** repeats **while** its condition is TRUE. **REPEAT** repeats **until** its condition is TRUE. So the two conditions are **opposites**: $\text{Count} \leq 5$ and $\text{Count} > 5$.
- If nothing inside the loop changes the condition, the loop never ends: an **infinite loop**.
- Any **FOR** loop can be rewritten as a **WHILE** loop, but not always the reverse: a **FOR** loop needs the number of passes before it starts.

■ Where the test is

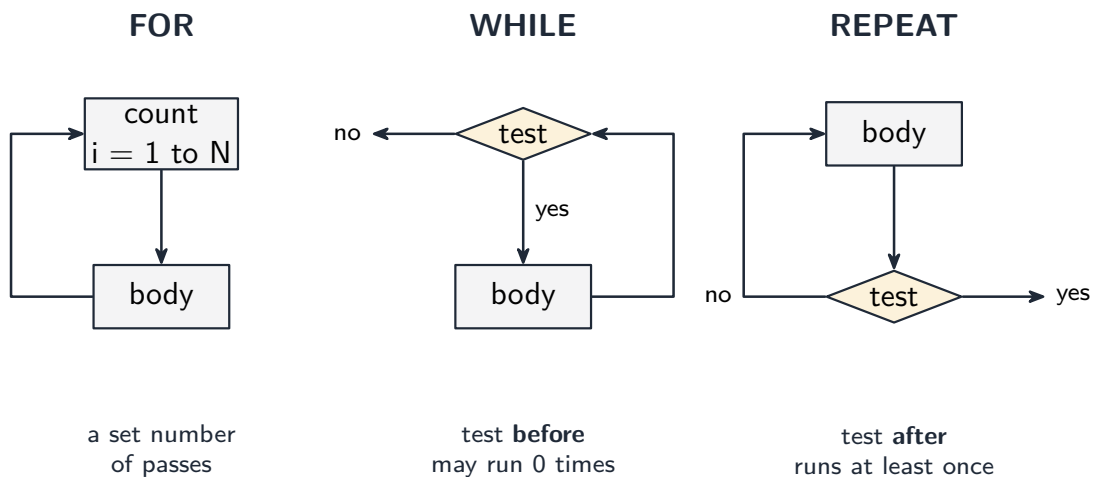

	WHILE ... ENDWHILE	REPEAT ... UNTIL
name	pre-condition loop	post-condition loop
the condition is tested	before each pass	after each pass
fewest passes	0 : the body may never run	1 : the body always runs once
the loop stops when the condition is	FALSE	TRUE

■ A validation loop

Input a mark, and keep asking until it is from 0 to 100.

```
REPEAT
    OUTPUT "Enter a mark from 0 to 100"
    INPUT Mark
UNTIL Mark >= 0 AND Mark <= 100
```

- The mark must be input **at least once** before it can be checked, so a post-condition loop fits.
- With a pre-condition loop, input the mark once **before** the loop and again as the last statement **inside** it, and loop **WHILE** Mark < 0 OR Mark > 100.

■ A rogue value

*Input prices one at a time until -1 is entered, then output the total price. The value -1 is a **rogue value**: it ends the loop, and it must **not** be added to the total.*

```
Total ← 0
INPUT Price
WHILE Price <> -1
    Total ← Total + Price
    INPUT Price
ENDWHILE
OUTPUT Total
```

- A pre-condition loop is used, because the very first input could be -1, and then nothing should be added.
- Inside the loop, **process the value, then input the next one**, so every value is tested before it is used.

■ Choosing and justifying a loop

the problem	best loop	justification
process exactly 30 readings	count-controlled (FOR)	the number of repetitions is known before the loop starts
read values until a rogue value, which could come first	pre-condition (WHILE)	tested before the first pass, so the loop can run zero times
input a password until it is correct	post-condition (REPEAT)	the body must run at least once: the value to test is input inside the loop

- Name the loop **and** give the reason **in terms of the problem**: “because it repeats” earns nothing.

2 Practice

Now use the methods above. The first questions need one idea each.

2.1 Tick (✓) **one** box in each row to show which loop the statement describes. [4]

Statement	WHILE	REPEAT
The condition is tested before the body runs.		
The body always runs at least once.		
The loop stops when the condition becomes TRUE.		
It is called a pre-condition loop.		

2.2 State which loop may run **zero** times and which runs **at least once**. [2]

2.3 State what each loop outputs.

[3]

(a)

```
N ← 1
WHILE N < 20
    N ← N * 3
ENDWHILE
OUTPUT N
```

(b)

```
N ← 50
REPEAT
    N ← N - 20
UNTIL N < 0
OUTPUT N
```

(c)

```
N ← 10
WHILE N < 5
    N ← N + 1
ENDWHILE
OUTPUT N
```

2.4 Rewrite this count-controlled loop as a pre-condition loop that gives the same output.

[3]

```
FOR Number ← 3 TO 15 STEP 3
    OUTPUT Number
NEXT Number
```

2.5 Write pseudocode that inputs a person's age, and repeats the input until the age is from 0 to 120. Use a post-condition loop. [3]

2.6 A program reads words from the user until the user types "END". The user may type "END" as the first word. State the most suitable loop structure, and justify your choice. [2]

3 Exam-style questions

3.1 A program must keep asking for a password until the user types "OPEN". Write the loop using the **most suitable** construct, and **justify** your choice. [3]

3.2 Write a **pre-condition** loop that reads numbers and adds them to a **Total**, stopping once **Total** reaches **100**. [3]

3.3 A teacher inputs the marks of a class, one mark at a time. The number of students is not known, and the rogue value -1 is input after the last mark. The class may be empty, so -1 may be the first input.

Write pseudocode that outputs the **mean** mark, or the message "No marks" if no marks were input. Declare your variables. [7]

3.4 Explain when an algorithm should use a REPEAT . . . UNTIL loop rather than a WHILE loop, and give an example of such a task. [3]

3.5 Study this pseudocode.

```
INPUT Number
REPEAT
    OUTPUT Number
    Number  $\leftarrow$  Number - 1
UNTIL Number = 0
```

(a) State what is output when the input is 3. [1]

(b) State what happens when the input is 0, and explain why. [2]

(c) Rewrite the pseudocode with a pre-condition loop, so that nothing is output when the input is 0 or less. [3]

3.6 A calculator program repeats a menu until the user chooses to stop.

choice	action
1	input a number and add it to Total
2	input a number and multiply Total by it
3	output Total
4	output " Stopped ", and the program ends

(a) Write pseudocode for the program, using a **CASE** structure inside a loop. **Total** starts at 1, and any other choice outputs "**Invalid**". [6]

(b) **Justify** the loop structure you used. [2]