

13.1.1 Designing a user-defined type for a problem, and the linked list

Name: _____ Class: _____ Date: _____

Total: 30 marks

KEY WORDS record 记录 • class 类 • object 对象 • pointer 指针 • enumerated type 枚举类型

Objective

Sheet 13.1 declares each kind of user-defined type on its own – one enumerated type, one pointer, one set, one class. This sheet does the statement the parent only touches, and the one Paper 4 actually asks: **choose and design an appropriate user-defined data type for a given problem**. That nearly always means **nesting** types inside a record, and it often means the pair of declarations that build a **linked list**. This sheet covers syllabus 13.1.


You must be able to:

- show understanding of why **user-defined types** are necessary
- define and use **non-composite types**, including **enumerated** and **pointer** types
- define and use **composite data types**, including **set**, **record** and **class/object**
- **choose and design an appropriate user-defined data type for a given problem**

1 Worked examples

Study these first. Each one shows a **method** that a question later on this sheet needs.

■ Designing a type from the problem, in four steps

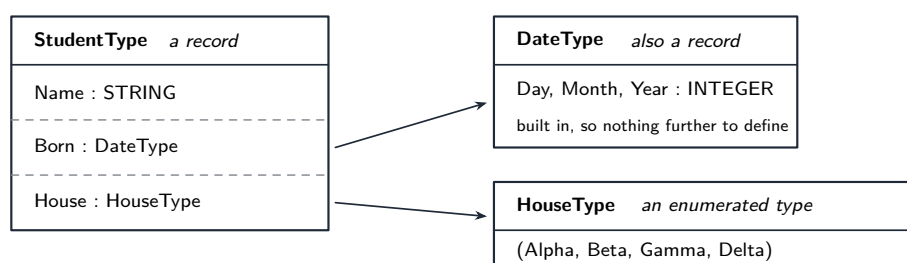

Design from the *problem*, not from the type list: one **record** per thing the program stores, one **field** per fact about it, and then choose each field's type – built in where one fits, an **enumerated** type where the fact is one of a fixed few, and *another record* where the fact has parts of its own.

Do not start from the list of type kinds and look for somewhere to use them. Start

from the problem and let the type kinds be the **answers**:

1. **One record per thing the program stores.** A student, a book, a booking.
2. **One field per fact about that thing.** Write the facts down in plain words first.
3. **Choose each field's type.** A built-in type if one fits (STRING, INTEGER, REAL, BOOLEAN, DATE); an **enumerated** type if the fact is exactly one of a fixed few named values; a **SET** if it can be several of a fixed few at once; **another record** if the fact has parts of its own.
4. **Declare the types the record needs before the record itself**, because a declaration may only use a type that already exists.

```
TYPE HouseType = (Alpha, Beta, Gamma, Delta)
```

```
TYPE DateType
```

```
    DECLARE Day : INTEGER
```

```
    DECLARE Month : INTEGER
```

```
    DECLARE Year : INTEGER
```

```
ENDTYPE
```

```
TYPE StudentType
```

```
    DECLARE Name : STRING
```

```
    DECLARE Born : DateType
```


```
    DECLARE House : HouseType
```

```
ENDTYPE
```

Reaching a nested field just extends the dot: `Class[3].Born.Year ← 2009`.

△ “**Why a user-defined type?**” is not “**because it is neater.**” The marks are for: the compiler can then **check** that only a sensible value is stored (`House ← Alpha` is allowed, `House ← "Alphaa"` is not); one variable carries all the facts about one thing, so they cannot drift apart; and the type can be **passed, returned and stored in an array as a single item**.

■ The pair of declarations that builds a linked list

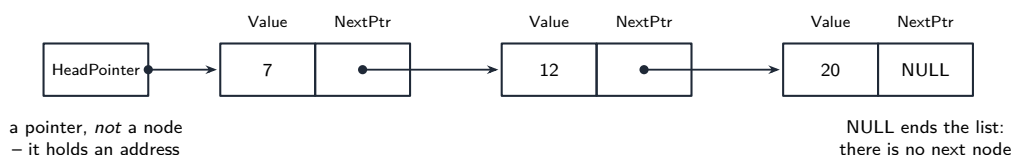

The node record and the pointer type each name the other, so the **pointer type is declared first** – TYPE PNode = ^NodeType above TYPE NodeType. To walk the list, follow NextPtr from the head and stop when it is NULL; to insert at the front, point the new node at the old head and then move the head.

A node is a **record** holding the data plus a **pointer** to the next node, and the two types name each other. Declare the **pointer type first**: it may name a record type not yet defined, but the record cannot name a pointer type that does not exist.

```

TYPE PNode = ^NodeType

TYPE NodeType
    DECLARE Value : INTEGER
    DECLARE NextPtr : PNode
ENDTYPE

DECLARE HeadPointer : PNode
HeadPointer ← NULL

```

- **Insert at the front** – point the new node at the old head, *then* move the head. Doing those two in the other order loses the rest of the list:

```

DECLARE NewNode : PNode
NewNode ← NEW NodeType
NewNode^.Value ← 12
NewNode^.NextPtr ← HeadPointer
HeadPointer ← NewNode

```

- **Traverse** – start at the head, follow NextPtr, stop at NULL:

```

DECLARE Current : PNode
Current ← HeadPointer
WHILE Current <> NULL DO
    OUTPUT Current^.Value
    Current ← Current^.NextPtr
ENDWHILE

```

■ Array of records, or linked list?

	array of records	linked list
size	fixed when declared	grows and shrinks while running
finding item n	direct, one step	follow n pointers from the head
inserting in the middle	shuffle every later item along	change two pointers
memory	one block, some of it unused	one node at a time, plus a pointer each

Choose by what the problem does most: if it mostly **looks items up by position**, an array; if it mostly **inserts and deletes**, or the number of items is unknown, a linked list.

2 Practice

Now use the methods above.

2.1 A program stores, for each member of a sports club, their name, their date of birth, and which one of the four teams Red, Blue, Green or Yellow they belong to. State the user-defined type you would use for the date and the one you would use for the team, and justify each choice. [3]

2.2 Declare a record type **DateType** with three integer fields for the day, month and year. [3]

2.3 Declare a record type **MemberType** whose fields are a name, a **DateType** and an enumerated type **TeamType**. You may assume **TeamType** has already been declared. [3]

2.4 State **two** advantages of a linked list over an array of records. [2]

2.5 State what the **NextPtr** field of the **last** node in a linked list holds. [1]

3 Exam-style questions

3.1 Which of these is a **non-composite** user-defined type?

[1]

A	B
C	D

A record

B set

C enumerated

D class

3.2 A library program stores, for each book, its title, its author, the year it was published, and whether it is currently on the shelf, on loan or lost.

(a) Declare a suitable **enumerated** type **StatusType** for the last of these.

[2]

(b) Declare a record type **BookType** for one book, using **StatusType**.

[3]

(c) Declare an array **Catalogue** able to hold 500 books, and write the statement that sets the status of the first book in the array to on loan.

[2]

3.3 A program stores a list of integers in a linked list. Each node holds one integer and a pointer to the next node.

(a) Declare the pointer type **PNode** and the record type **NodeType**, in the correct order.[4]

(b) The list is empty, and then the values 20, 12 and 7 are each inserted **at the front**, in that order. State the value in the node that **HeadPointer** points to afterwards, and state what the **NextPtr** of the node holding 20 contains. [3]

(c) Write pseudocode that outputs every value in the list, starting from **HeadPointer**. [3]