

8.3 Data Definition Language (DDL) and Data Manipulation Language (DML)

Name: _____ Class: _____ Date: _____

Total: 39 marks

KEY WORDS data definition language 数据定义语言 • data manipulation language 数据操纵语言
 • query 查询 • dbms 数据库管理系统 • join 连接

Objective

Build the skills to answer exam questions on **SQL** 结构化查询语言 — the difference between DDL and DML, and reading and writing simple SQL statements.


You must be able to:

- explain that the DBMS uses **DDL** to build the structure and **DML** to work with the data
- read and write simple **SQL (DDL)** statements (CREATE, ALTER, DROP)
- write **SQL (DML)** to query or change data in up to two tables

1 Worked examples

Study these first. Each one shows the method for a question type used later — follow the steps and you can do the Practice and Exam-style questions yourself.

■ DDL or DML?

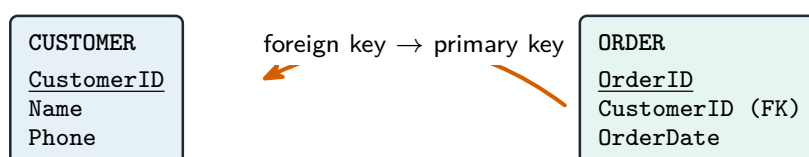

DDL builds the tables and keys that DML statements then query

SQL has two halves: **Data Definition Language (DDL)** changes the **structure** (tables, keys); **Data Manipulation Language (DML)** works with the **data** (query, insert, update, delete).

■ DDL — building the structure

```
CREATE TABLE Student (  
    StudentID INTEGER PRIMARY KEY,  
    Name      VARCHAR(50) NOT NULL,  
    Year      INTEGER  
);  
  
ALTER TABLE Student ADD Email VARCHAR(100);
```

A **foreign key** is declared with `FOREIGN KEY ... REFERENCES`:

```
CREATE TABLE Grade (  
    StudentID INTEGER,  
    Mark      INTEGER,  
    FOREIGN KEY (StudentID) REFERENCES Student(StudentID)  
);
```

■ DML — working with the data

```
INSERT INTO Student (StudentID, Name, Year) VALUES (7, 'Lee', 12);  
  
SELECT Name FROM Student WHERE Year = 12 ORDER BY Name;  
  
UPDATE Student SET Year = 13 WHERE StudentID = 7;  
  
DELETE FROM Student WHERE Year = 13;
```

To query **two tables**, match the foreign key to the primary key:

```
SELECT Student.Name, Grade.Mark  
FROM   Student, Grade  
WHERE  Student.StudentID = Grade.StudentID;
```

2 Practice

Now apply the methods above.

2.1 State the difference between **DDL** and **DML**.

[2]

2.2 Write an SQL statement to list the **Name** of every student in **Year 12**. [2]

2.3 Write an SQL statement to **insert** a new student (StudentID 9, name “Sam”, Year 11). [2]

2.4 Name the SQL statement used to **change a table’s structure**. [1]

3 Exam-style questions

3.1 Write SQL **DDL** to create a table **Book** with: **BookID** (integer, primary key), **Title** (text, must not be empty), **Author** (text). [3]

3.2 Write SQL to change the **Year** of the student with **StudentID** 5 to 13. [2]

3.3 Tables `Student(StudentID, Name)` and `Grade(StudentID, Mark)` are linked by `StudentID`. Write SQL to list each student's **Name** with their **Mark**. [3]

3.4 Write SQL to **delete** every student in Year 13. [2]

3.5 Write SQL **DDL** to create a table `Grade` with `StudentID` (integer) as a **foreign key** referencing `Student(StudentID)`, and `Mark` (integer). [3]

3.6 Write SQL to list the **Name** of every Year-12 student, sorted into **alphabetical order** of name. [3]

3.7 A shipping company's database has two tables:

SHIP(ShipID, ShipName, Capacity) and CONTAINER(ContainerID, ShipID, Contents, Weight)

(a) **Describe** the relationship between the two tables, referring to the **primary** and **foreign** keys. [3]

(b) The company must record the date each container was last inspected. **Write** the SQL to add a suitable field to the CONTAINER table. [2]

(c) **Write** an SQL script to return the **number** of containers stored for the ship whose ShipName is 'Aurora'. [4]

(d) **Write** an SQL script to list the ShipName and the total Weight carried, for every ship carrying more than 500 tonnes, heaviest first. [4]

(e) **Describe** the purpose of the **developer interface** in a DBMS, and **give** one feature it provides that the query processor does not. [3]
