


Data Types & Structures

AS Computer Science • Topic 10


A-Level Computer Science



Data Types & Structures

What we will cover

- 1 Data types & records
- 2 Arrays
- 3 Files
- 4 Stacks, queues, linked lists
- 5 Implementing with arrays
- 6 Recap



1 Data types and records

Data Types & Structures

└ Data types and records

Data types and records

Pick the smallest precise **data type** 数据类型:

- INTEGER, REAL, STRING
- CHAR, BOOLEAN, DATE

A **record** 记录 groups several types under one name (dot notation `Item1.Category`).

record TStockItem

ItemID : INTEGER
Category : STRING
ItemCost : REAL
InStock : BOOLEAN

one name holds four fields of different types

reach one field: `Item1.Category`


2 Arrays

Data Types & Structures

└ Arrays

Arrays

An **array** 数组 is a numbered list of the same type. Index from the lower bound.




2-D - [row, column]

2	7	4
2	7	4

Searching and sorting

Linear search walks from the start until it finds the target – works on any list, $O(n)$. **Bubble sort** swaps adjacent pairs that are out of order, so the largest “bubbles” to the end each pass – $O(n^2)$.



Worked example: find the largest

```
DECLARE Marks : ARRAY[1:4] OF INTEGER
Max ← Marks[1]
FOR i ← 2 TO 4
  IF Marks[i] > Max THEN
    Max ← Marks[i]
  ENDIF
NEXT i
OUTPUT Max
```

	[1]	[2]	[3]	[4]
	7	3	9	2

i	Marks[i]	Max
—	—	7
2	3	7
3	9	9
4	2	9

output: **9**

Start Max at the **first element**, not at 0 – then compare from the second.

Files




A **file** 文件 keeps data on disk **between runs** (RAM is lost at exit).

- OPENFILE for READ/WRITE/APPEND
- EOF tests the **end of file** 文件结束
- always CLOSEFILE – or buffered writes are lost

3 ADTs

Abstract data types: the stack




A **stack** 栈 is **LIFO** 后进先出: push and pop happen at the **top** – undo history, procedure calls.



A stack is
last-in, first-out


Abstract data types: the queue



A queue is first-in, first-out


A **queue** 队列 is **FIFO** 先进先出: enqueue at the back, dequeue at the front – print **spooling** 排队打印, scheduling.

Linked list

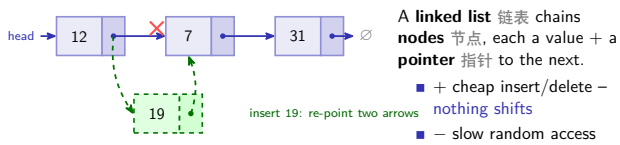


4 Implementing

ADTs with arrays

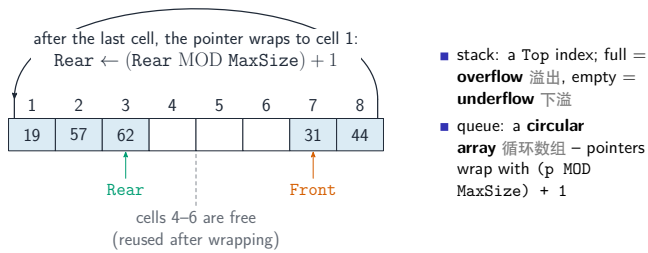

Linked list in an array

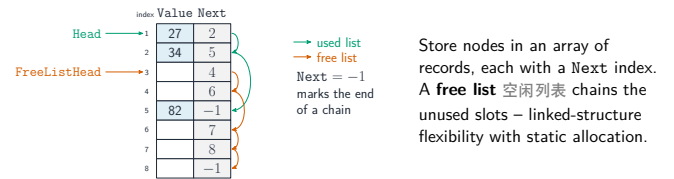

5 Recap

Topic 10 – key takeaways

1 **Records & arrays**
records mix types; arrays hold one type

2 **Files**
persist data; open, read/write, close

3 **Stack & queue**
LIFO vs FIFO

4 **Linked list**
nodes with pointers; cheap insert/delete

Check yourself

- 1 Which holds several different types together?
- 2 Which ADT is FIFO?
- 3 Why use a circular array for a queue?
- 4 One advantage of a linked list over an array?



Answers 1. a record 2. a queue 3. reuse the wrapped-round cells 4. cheap insertion/deletion