

2019

AP[®] CollegeBoard

AP[®] Physics C: Mechanics

Scoring Guidelines Set 1


2019 SCORING GUIDELINES

General Notes About 2019 AP Physics Scoring Guidelines


1. The solutions contain the most common method of solving the free-response questions and the allocation of points for this solution. Some also contain a common alternate solution. Other methods of solution also receive appropriate credit for correct work.
2. The requirements that have been established for the paragraph-length response in Physics 1 and Physics 2 can be found on AP Central at <https://secure-media.collegeboard.org/digitalServices/pdf/ap/paragraph-length-response.pdf>.
3. Generally, double penalty for errors is avoided. For example, if an incorrect answer to part (a) is correctly substituted into an otherwise correct solution to part (b), full credit will usually be awarded. One exception to this may be cases when the numerical answer to a later part should be easily recognized as wrong, e.g., a speed faster than the speed of light in vacuum.
4. Implicit statements of concepts normally receive credit. For example, if use of the equation expressing a particular concept is worth 1 point, and a student's solution embeds the application of that equation to the problem in other work, the point is still awarded. However, when students are asked to derive an expression, it is normally expected that they will begin by writing one or more fundamental equations, such as those given on the exam equation sheet. For a description of the use of such terms as “derive” and “calculate” on the exams, and what is expected for each, see “The Free-Response Sections — Student Presentation” in the *AP Physics; Physics C: Mechanics, Physics C: Electricity and Magnetism Course Description* or “Terms Defined” in the *AP Physics 1: Algebra-Based Course and Exam Description* and the *AP Physics 2: Algebra-Based Course and Exam Description*.
5. The scoring guidelines typically show numerical results using the value $g = 9.8 \text{ m/s}^2$, but the use of 10 m/s^2 is of course also acceptable. Solutions usually show numerical answers using both values when they are significantly different.
6. Strict rules regarding significant digits are usually not applied to numerical answers. However, in some cases answers containing too many digits may be penalized. In general, two to four significant digits are acceptable. Numerical answers that differ from the published answer due to differences in rounding throughout the question typically receive full credit. Exceptions to these guidelines usually occur when rounding makes a difference in obtaining a reasonable answer. For example, suppose a solution requires subtracting two numbers that should have five significant figures and that differ starting with the fourth digit (e.g., 20.295 and 20.278). Rounding to three digits will lose the accuracy required to determine the difference in the numbers, and some credit may be lost.

Question 1

15 points



In an experiment, students used video analysis to track the motion of an object falling vertically through a fluid in a glass cylinder. The object of $m = 12\text{ g}$ is released from rest at the top of the column of fluid, as shown above. The data for the speed v of the falling object as a function of time t are graphed on the grid below. The dashed curve represents the best fit chosen by the students for these data.

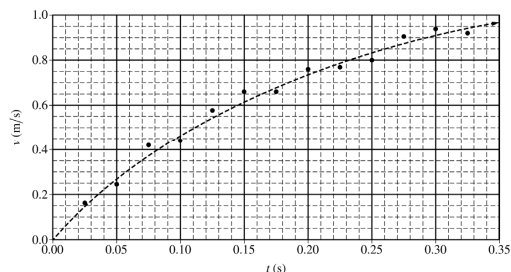

- (a)
i. LO CHA-1.C, SP 7.A
1 point

Does the speed of the object increase, decrease, or remain the same?

☐ Increase ☐ Decrease ☐ Remain the same

For selecting "Increase"

1 point

- ii. LO CHA-1.C, SP 4.D
2 points

In a brief statement, describe the direction of the object's acceleration and how the magnitude of this acceleration changed as the object fell.


For a description that includes the direction of the acceleration as being "downwards" 1 point

For a description that includes the decrease in the magnitude of the acceleration 1 point

Example: Because the object is moving downwards and speeding up, the acceleration must be downwards. Because the slope of the graph of speed as a function of time is decreasing, the magnitude of the acceleration must be decreasing.

Question 1 (continued)

(a) continued

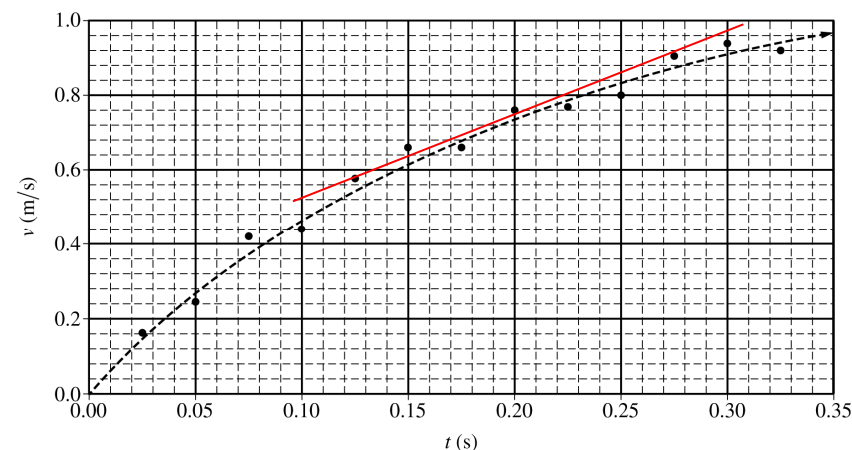

- iii. LO CHA-1.C, SP 4.D, 6.C
2 points

Using the graph, calculate an approximate value for the magnitude of the acceleration of the object at $t = 0.20\text{ s}$.

For calculating the slope of a trend line at $t = 0.20\text{ s}$	1 point
$\text{slope} = a = \frac{\Delta v}{\Delta t} = \frac{(0.8 - 0.6)\text{ m/s}}{(0.226 - 0.136)\text{ s}}$	
For a correct answer using points from a tangent line	1 point
$a = 2.22\text{ m/s}^2$	

The students use the equation $v = A(1 - e^{-Bt})$ to model the speed of the falling object and find the best-fit coefficients to be $A = 1.18\text{ m/s}$ and $B = 5\text{ s}^{-1}$.

2019 SCORING GUIDELINES

Question 1 (continued)

(b) Use the above equation to:

- i. LO CHA-1.B, SP 6.B, 6.C
3 points

Derive an expression for the magnitude of the vertical displacement $y(t)$ of the falling object as a function of time t .

For indicating that the vertical displacement is the integration of the velocity	1 point
$\Delta y = \int v dt = \int A(1 - e^{-Bt}) dt$	
For the equation for speed using appropriate limits or constant of integration	1 point
$\Delta y = \int_{t'=0}^{t'=t} A(1 - e^{-Bt'}) dt' = A \left[t' - \frac{1}{-B} e^{-Bt'} \right]_{t'=0}^{t'=t} = A \left[\left(t + \frac{1}{B} e^{-Bt} \right) - \left(0 + \frac{1}{B} e^0 \right) \right]$	
For a correct answer	1 point
$\Delta y = A \left(t + \frac{1}{B} (e^{-Bt} - 1) \right) = (1.18) \left(t + \frac{1}{5} (e^{-5t} - 1) \right)$	
<u>Note:</u> Credit given for using A and B or plugging in the given values	

- ii. LO INT-1.C.d, SP 6.B, 6.C
3 points

Derive an expression for the magnitude of the net force $F(t)$ exerted on the object as it falls through the fluid as a function of time t .

For attempting the derivative of the equation for speed	1 point
$a = \frac{dv}{dt} = \frac{d}{dt} [A(1 - e^{-Bt})]$	
For a correct equation for the acceleration	1 point
$a = AB e^{-Bt}$	
For multiplying the equation above by the mass of the object	1 point
$F = ma = m(AB e^{-Bt}) = mAB e^{-Bt}$	
$F = (.012)(1.18)(5) e^{-5t} = 0.071 e^{-5t}$	
<u>Note:</u> Credit given for using A , B , and m or plugging in the given values	

2019 SCORING GUIDELINES

Question 1 (continued)

(c)

The students repeat the experiment with a taller glass cylinder that is filled with the same fluid. The cylinder is tall enough so that the object reaches a constant speed.

- i. LO INT-1.I, SP 7.A, 7.C
2 points

Determine the constant speed of the object.
Justify your answer.

For stating the constant speed is $v = A$	1 point
For indicating that the constant speed can be determined by setting the time equal to infinity	1 point
Example: After a long time, the falling object will reach a terminal constant speed in the fluid. This can be determined by setting the time t in the equation for speed equal to infinity. By doing this, the constant speed is determined to be $v = A$.	
<u>Note:</u> Credit given for solving mathematically	

- ii. LO INT-1.H.b, SP 7.A, 7.C
2 points

Determine the force exerted by the fluid on the object at this time. Justify your answer.

For indicating that the net force is equal to zero when the object moves with constant speed	1 point
For indicating the resistive force is equal to the weight of the object at this time	1 point
Example: When the falling object reaches a constant speed in the fluid, the net force must be zero. Because the only vertical forces acting on the object are Earth's gravitational pull and the resistive force of the fluid, these two forces must be equal. So, the resistive force must be equal to the weight of the object or 0.12 N.	
<u>Note:</u> Credit given for solving mathematically	

2019 SCORING GUIDELINES

Question 1 (continued)

Learning Objectives

CHA-1.B: Determine functions of position, velocity, and acceleration that are consistent with each other, for the motion of an object with a nonuniform acceleration.

CHA-1.C: Describe the motion of an object in terms of the consistency that exists between position and time, velocity and time, and acceleration and time.

INT-1.C.d: Derive an expression for the net force on an object in translational motion.

INT-1.H.b: Describe the acceleration, velocity, or position in relation to time for an object subject to a resistive force (with different initial conditions, i.e., falling from rest or projected vertically).

INT-1.I: Calculate the terminal velocity of an object moving vertically under the influence of a resistive force of a given relationship.

Science Practices

4.D: Select relevant features of a graph to describe a physical situation or solve problems.

6.B: Apply an appropriate law, definition, or mathematical relationship to solve a problem.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.


7.A: Make a scientific claim.

7.C: Support a claim with evidence from physical representations.

2019 SCORING GUIDELINES

Question 2

15 points



Note: Figure not drawn to scale.

A pendulum of length L consists of block 1 of mass $3M$ attached to the end of a string. Block 1 is released from rest with the string horizontal, as shown above. At the bottom of its swing, block 1 collides with block 2 of mass M , which is initially at rest at the edge of a table of height $2L$. Block 1 never touches the table. As a result of the collision, block 2 is launched horizontally from the table, landing on the floor a distance $4L$ from the base of the table. After the collision, block 1 continues forward and swings up. At its highest point, the string makes an angle θ_{MAX} to the vertical. Air resistance and friction are negligible. Express all algebraic answers in terms of M , L , and physical constants, as appropriate.


- (a) LO CON-2.C.a, SP 5.E
1 point

Determine the speed of block 1 at the bottom of its swing just before it makes contact with block 2.

For correctly calculating the speed of block 1	1 point
$U_{g1} = K_2 \therefore mgh = \frac{1}{2}mv^2 \therefore gL = \frac{1}{2}v^2$	
$v = \sqrt{2gL}$	
Note: Credit is earned even if no work is shown.	

- (b) LO INT-2.B.b, SP 3.D
2 points

On the dot below, which represents block 1, draw and label the forces (not components) that act on block 1 just before it makes contact with block 2. Each force must be represented by a distinct arrow starting on, and pointing away from, the dot. Forces with greater magnitude should be represented by longer vectors.



For correctly drawing and labeling the weight of the block and the tension in the string	1 point
For drawing the tension longer than the weight of the block	1 point
Note: A maximum of one point can be earned if there are any extraneous vectors.	

2019 SCORING GUIDELINES

Question 2 (continued)

- (c) LO INT-2.B.b, SP 5.A, 5.E
2 points

Derive an expression for the tension F_T in the string when the string is vertical just before block 1 makes contact with block 2. If you need to draw anything other than what you have shown in part (b) to assist in your solution, use the space below. Do NOT add anything to the figure in part (b).

For using an appropriate equation to calculate the tension in the string	1 point
$F_T = mg + ma_C = mg + \frac{mv^2}{r} = 3Mg + \frac{(3M)(\sqrt{2gL})^2}{L}$	
For a correct answer	1 point
$F_T = 9Mg$	

For parts (d)–(g), the value for the length of the pendulum is $L = 75$ cm.

- (d) LO CHA-2.C, SP 6.A, 6.C
2 points

Calculate the time between the instant block 2 leaves the table and the instant it first contacts the floor.

For using a correct kinematic equation to calculate the time	1 point
$\Delta y = v_{1i}t + \frac{1}{2}at^2 = \frac{1}{2}at^2 \therefore t = \sqrt{\frac{2\Delta y}{a}} = \sqrt{\frac{2(2L)}{g}} = \sqrt{\frac{(4)(0.75 \text{ m})}{(9.8 \text{ m/s}^2)}}$	
For a correct answer	1 point
$t = 0.55 \text{ s}$	

- (e) LO CHA-2.C, SP 6.A, 6.C
2 points

Calculate the speed of block 2 as it leaves the table.

For using a correct kinematic equation to calculate the speed	1 point
$\Delta x = vt \therefore v = \frac{\Delta x}{t} = \frac{4L}{t}$	
For substituting the time from part (d) into equation above	1 point
$v = \frac{(4)(0.75 \text{ m})}{(0.55 \text{ s})} = 5.45 \text{ m/s}$	

2019 SCORING GUIDELINES

Question 2 (continued)

- (f) LO CON-4.E.a, SP 6.B, 6.C
3 points

Calculate the speed of block 1 just after it collides with block 2.

For indicating the use of the correct conservation of momentum to calculate the speed	1 point
$p_i = p_f \therefore m_1v_{1i} + m_2v_{2i} = m_1v_{1f} + m_2v_{2f}$	
For correctly substituting the mass into equation above	1 point
$(3M)v_{1i} + 0 = (3M)v_{1f} + (M)v_{2f}$	
For substituting the speeds from parts (a) and (e) into equation above	1 point
$v_{1f} = \frac{(3M)v_{1i} - (M)v_{2f}}{(3M)} = \frac{(3M)\sqrt{2gL} - (M)v_{2f}}{(3M)}$	
$v_{1f} = \frac{(3)\sqrt{(2)(9.8 \text{ m/s}^2)(0.75 \text{ m})} - (1)(5.45 \text{ m/s})}{(3)} = 2.02 \text{ m/s}$	
$(v_{1f} = 2.06 \text{ m/s when using } g = 10 \text{ m/s}^2)$	

- (g) LO CON-2.C.a, SP 6.B, 6.C
3 points

Calculate the angle θ_{MAX} that the string makes with the vertical, as shown in the original figure, when block 1 is at its highest point after the collision.

For using conservation of energy to calculate the angle	1 point
$K_1 = U_{g2}$	
$\frac{1}{2}mv^2 = mgh$	
For correctly substituting $h = L(1 - \cos\theta)$ into the equation above	1 point
For correctly substituting the speed from part (f) into the equation above	1 point
$\frac{1}{2}mv^2 = mgL(1 - \cos\theta) \therefore \frac{v^2}{2gL} = 1 - \cos\theta$	
$\theta = \cos^{-1}\left(1 - \frac{v^2}{2gL}\right) = \cos^{-1}\left(1 - \frac{(2.02 \text{ m/s})^2}{(2)(9.8 \text{ m/s}^2)(0.75 \text{ m})}\right) = 43.5^\circ$	
$(\theta = 44.1^\circ \text{ when using } g = 10 \text{ m/s}^2)$	

2019 SCORING GUIDELINES

Question 2 (continued)

Learning Objectives

CHA-2.C: Calculate kinematic quantities of an object in projectile motion, such as displacement, velocity, speed, acceleration, and time, given initial conditions of various launch angles, including a horizontal launch at some point in its trajectory.

INT-2.B.b: Describe forces that are exerted on objects undergoing horizontal circular motion, vertical circular motion, or horizontal circular motion on a banked curve.

CON-2.C.a: Calculate unknown quantities (e.g., speed or positions of an object) that are in a conservative system of connected objects, such as the masses in an Atwood machine, masses connected with pulley/string combinations, or the masses in a modified Atwood machine.

CON-4.E.a: Calculate the changes in speeds, changes in velocities, changes in kinetic energy, or changes in momenta of objects in all types of collisions (elastic or inelastic) in one dimension, given the initial conditions of the objects.

Science Practices

3.D: Create appropriate diagrams to represent physical situations.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

6.A: Extract quantities from narratives or mathematical relationships to solve problems.


6.B: Apply an appropriate law, definition, or mathematical relationship to solve a problem.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

2019 SCORING GUIDELINES

Question 3

15 points



A horizontal circular platform with rotational inertia I_P rotates freely without friction on a vertical axis. A small motor-driven wheel that is used to rotate the platform is mounted under the platform and touches it. The wheel has radius r and touches the platform a distance D from the vertical axis of the platform, as shown above. The platform starts at rest, and the wheel exerts a constant horizontal force of magnitude F tangent to the wheel until the platform reaches an angular speed ω_P after time Δt . During time Δt , the wheel stays in contact with the platform without slipping.

- (a) LO INT-7.A.b, CHA-4.A.b, SP 5.A, 5.E
2 points

Derive an expression for the angular speed ω_P of the platform. Express your answer in terms of I_P , r , D , F , Δt , and physical constants, as appropriate.

For correctly substituting into the rotational form of Newton's second law			1 point
$\tau = I\alpha \therefore FD = I_P\alpha$			
$\alpha = \frac{FD}{I_P}$			
For correctly substituting into a rotational kinematic equation to calculate the angular speed			1 point
$\omega_2 = \omega_1 + \alpha\Delta t = 0 + \left(\frac{FD}{I_P}\right)\Delta t$			
$\omega_P = \frac{FD\Delta t}{I_P}$			

- (b) LO INT-7.D.a, SP 5.A, 5.E
2 points

Determine an expression for the kinetic energy of the platform at the moment it reaches angular speed ω_P . Express your answer in terms of I_P , r , D , F , Δt , and physical constants, as appropriate.

For using the equation for rotational kinetic energy		1 point
$K = \frac{1}{2}I\omega_P^2 = \left(\frac{1}{2}\right)(I_P)\left(\frac{FD\Delta t}{I_P}\right)^2$		
For an answer consistent with part (a)		1 point
$K = \frac{(FD\Delta t)^2}{2I_P}$		


2019 SCORING GUIDELINES

Question 3 (continued)

- (c) LO INT-7.C, SP 5.A, 5.E
2 points

Derive an expression for the angular speed of the wheel ω_W when the platform has reached angular speed ω_P . Express your answer in terms of D , r , ω_P , and physical constants, as appropriate.

For indicating that the linear speed of the platform is equal to the linear speed of the wheel		1 point
$v_P = v_W$ OR $(r\omega)_P = (r\omega)_W$		
For correctly relating the linear speeds to the angular speeds in the above equation		1 point
$D\omega_P = r\omega_W$		
$\omega_W = \frac{D\omega_P}{r}$		



When the platform is spinning at angular speed ω_P , the motor-driven wheel is removed. A student holds a disk directly above and concentric with the platform, as shown above. The disk has the same rotational inertia I_P as the platform. The student releases the disk from rest, and the disk falls onto the platform. After a short time, the disk and platform are observed to be rotating together at angular speed ω_f .

- (d) LO CON-5.D.c, SP 5.A, 5.E
2 points

Derive an expression for ω_f . Express your answer in terms of ω_P , I_P , and physical constants, as appropriate.

For using an expression for the conservation of angular momentum		1 point
$L_1 = L_2 \therefore I_1\omega_1 = I_2\omega_2$		
For correctly substituting into the above equation		1 point
$I\omega_P = (2I)\omega_f$		
$\omega_f = \frac{1}{2}\omega_P$		


2019 SCORING GUIDELINES

Question 3 (continued)

A student now uses the rotating platform ($I_P = 3.1 \text{ kg} \cdot \text{m}^2$) to determine the rotational inertia I_U of an unknown object about a vertical axis that passes through the object's center of mass. The platform is rotating at an initial angular speed ω_i when the unknown object is dropped with its center of mass directly above the center of the platform. The platform and object are observed to be rotating together at angular speed ω_f . Trials are repeated for different values of ω_i . A graph of ω_f as a function of ω_i is shown on the axes below.

- (e) i. LO CON-5.D.c, SP 4.C
1 points

On the graph on the previous page, draw a best-fit line for the data.

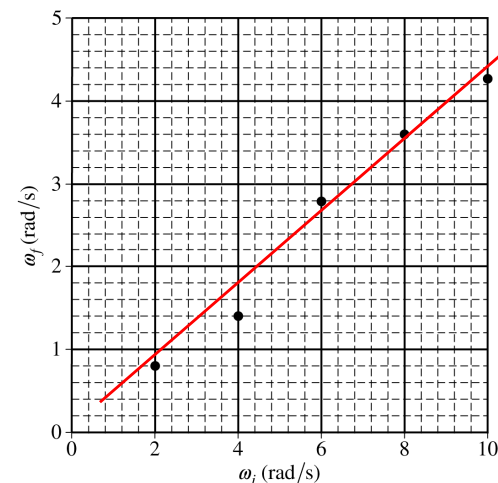

For an appropriate best-fit line for the graph above

1 point

2019 SCORING GUIDELINES

Question 3 (continued)

(e) continued

- ii. LO CON-5.D.c, SP 4.D, 6.C
2 points

Using the straight line, calculate the rotational inertia of the unknown object I_U about a vertical axis passing through its center of mass.

For using conservation of angular momentum to derive an expression that includes I_U	1 point
$L_i = L_f \therefore I_P \omega_i = (I_P + I_U) \omega_f$	
$I_U = I_P \left(\frac{\omega_i}{\omega_f} \right) - I_P$	
For substituting points from the best-fit line into the expression above	1 point
$I_U = (3.1 \text{ kg}\cdot\text{m}^2) \left(\frac{(4.0 - 1.0) \text{ rad/s}}{(9.3 - 2.4) \text{ rad/s}} \right) - (3.1 \text{ kg}\cdot\text{m}^2) = 4.1 \text{ kg}\cdot\text{m}^2$	
Note: The point (0, 0) can be used implicitly if the best-fit line goes through the origin.	

- (f) LO CON-5.D.c, SP 7.A, 7.C
2 points

The kinetic energy of the spinning platform before the object is dropped on it is K_i . The total kinetic energy of the platform-object system when it reaches angular speed ω_f is K_f . Which of the following expressions is true?

___ $K_f < K_i$ ___ $K_f = K_i$ ___ $K_f > K_i$

Justify your answer.

For selecting $K_f < K_i$ with an attempt at a relevant justification	1 point
For a correct justification	1 point
Example: Because the two disks will be rotating with the same final angular speed, this is an inelastic collision, and kinetic energy will be lost during the collision.	

2019 SCORING GUIDELINES

Question 3 (continued)

- (g) LO INT-6.E, SP 7.A, 7.C
2 points

One of the students observes that the center of mass of the object is not actually aligned with the axis of the platform. Is the experimental value of I_U obtained in part (e) greater than, less than, or equal to the actual value of the rotational inertia of the unknown object about a vertical axis that passes through its center of mass?

___ Greater than ___ Less than ___ Equal to

Justify your answer.

For selecting “Greater than” with an attempt at a relevant justification	1 point
For a correct justification	1 point
Example: Because the center of mass of the object is off the axis of the platform, the parallel axis theorem would be used to calculate the total rotational inertia of the platform-object system. Using $I = I_{CM} + Mh^2$, the experimental value will be increased by Mh^2 .	

Learning Objectives

INT-6.E: Derive the moments of inertia of an extended rigid body for different rotational axes (parallel to an axis that goes through the object’s center of mass) if the moment of inertia is known about an axis through the object’s center of mass.

CHA-4.A.b: Calculate unknown quantities such as angular positions, displacement, angular speeds, or angular acceleration of a rigid body in uniformly accelerated motion, given initial conditions.

INT-7.A.b: Calculate unknown quantities such as net torque, angular acceleration, or moment of inertia for a rigid body undergoing rotational acceleration.

INT-7.C: Derive expressions for physical systems such as Atwood Machines, pulleys with rotational inertia, or strings connecting discs or strings connecting multiple pulleys that relate linear or translational motion characteristics to the angular motion characteristics of rigid bodies in the system that are: **(a)** rolling (or rotating on a fixed axis) without slipping. **(b)** rotating and sliding simultaneously.

INT-7.D.a: Calculate the rotational kinetic energy of a rotating rigid body.

CON-5.D.c: Calculate the changes of angular momentum of each disc in a rotating system of two rotating discs that collide with each other inelastically about a common rotational axis.

Science Practices

4.C: Linearize data and/or determine a best-fit line or curve.

4.D: Select relevant features of a graph to describe a physical situation or solve problems.

5.A: Select an appropriate law, definition, or mathematical relationship or model to describe a physical situation.

5.E: Derive a symbolic expression from known quantities by selecting and following a logical algebraic pathway.

6.C: Calculate an unknown quantity with units from known quantities, by selecting and following a logical computational pathway.

7.A: Make a scientific claim.

7.C: Support a claim with evidence from physical representations.

AP[®] Physics C: Mechanics 2016 Scoring Guidelines


© 2016 The College Board. College Board, Advanced Placement Program, AP, AP Central, and the acorn logo are registered trademarks of the College Board.
Visit the College Board on the Web: www.collegeboard.org.
AP Central is the official online home for the AP Program: apcentral.collegeboard.org.

2016 SCORING GUIDELINES

15 points total


3 points

Question

Distribution
of points

For correctly drawing and labeling the force of tension 1 point
 For correctly drawing and labeling the force of friction 1 point
 For correctly drawing and labeling both forces in the vertical direction 1 point
 Note: A maximum of two points may be earned if there are any extraneous vectors.

3 points

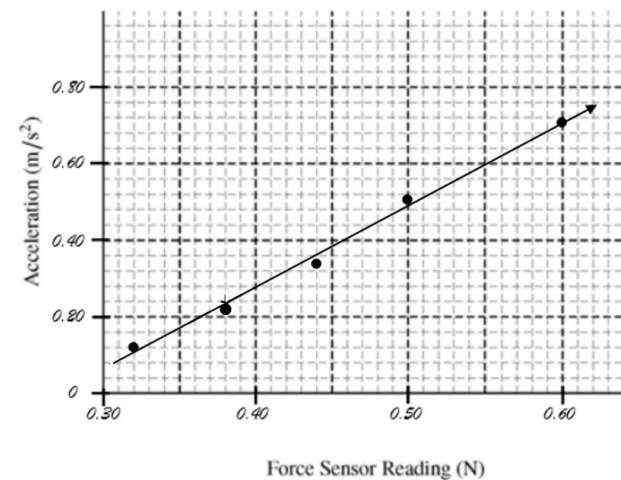

For a correct scale that uses more than half the grid 1 point
 For correctly plotting the given data 1 point
 For drawing a straight line consistent with the given data 1 point
 Note: Full credit can be earned if the axes are switched.

SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

2 points

For correctly calculating slope using the best-fit straight line and not data points

1 point

$$\text{slope} = \frac{(y_2 - y_1)}{(x_2 - x_1)} = \frac{(0.70 - 0.16)}{(0.60 - 0.35)} \text{ kg}^{-1} = 2.16 \text{ kg}^{-1}$$

Note: Linear regression gives slope = 2.12 kg^{-1} .

For correctly calculating the mass of the cart using the slope

1 point

$$m = \frac{1}{\text{slope}} = \frac{1}{(2.16 \text{ kg}^{-1})}$$

Correct answer:

 $m = 0.463 \text{ kg}$ (Note: linear regression gives $m = 0.472 \text{ kg}$)

1 point

For an answer with correct units consistent with the x-intercept of the graph from (b) i.

1 point

$$f = 0.272 \text{ N}$$

1 point

Applying Newton's second law and substituting the values from part (b)

$$\sum F = ma = F_a - f$$

$$a = \frac{F_a - f}{m} = \frac{0.45 \text{ N} - 0.272 \text{ N}}{0.463 \text{ kg}}$$

For an answer with correct units consistent with part (b), either from the graph or calculated using the mass and frictional force.

1 point

$$a = 0.376 \text{ m/s}^2$$

SCORING GUIDELINES

Question 1 (continued)

Distribution
of points

3 points

For using a correct equation to solve for the speed of the cart when the string breaks, with an acceleration consistent with part (c) i.

1 point

$$v_2 = v_1 + at$$

$$v_2 = 0 + (0.376 \text{ m/s}^2)(2.0 \text{ s})$$

$$v_2 = 0.752 \text{ m/s}$$

For recognizing that the acceleration of the cart after the string breaks is due to the frictional force determined in part (b)

1 point

Use a correct equation to solve for the time for the cart to stop after the string breaks

$$v_2 = v_1 + at$$

$$0 = v_1 - \frac{f}{m}t$$

For using the final velocity before the string breaks as the initial velocity for the cart stopping in the correct equation for time

1 point

$$t = \frac{mv_1}{f}$$

$$t = \frac{(0.463 \text{ kg})(0.752 \text{ m/s})}{(0.272 \text{ N})}$$

Correct answer

$$t = 1.28 \text{ s}$$

Alternate solution

Alternate points

For setting the magnitude of the impulse before the string breaks equal to the magnitude of the impulse after the string breaks

1 point

$$F_1 t_1 = F_2 t_2$$

For correctly using the proper force (e.g., the tension force minus the friction force) for F_1

1 point

For correctly using the proper force (e.g., the friction force) for F_2

1 point

Correct answer

$$t = 1.28 \text{ s}$$

1 point

For selecting "Equal to"

1 point

1 point

For selecting "Greater than"

1 point

SCORING GUIDELINES

15 points total	Question	Distribution of points
2 points		
	For correctly drawing and labeling vectors on the block of mass $2M$	1 point
	For correctly drawing and labeling vectors on the block of mass $3M$ using symbols for the vectors that are physically correct and different from those on the block of mass $2M$	1 point
	Note: A maximum of one point can be earned if there are any extraneous vectors.	
2 points		
	Using a proper expression for conservation of momentum	
	$p_1 = p_2$	
	For correctly substituting into the above equation	1 point
	$3Mv_0 = (3M + 2M)v_f$	
	For a correct answer	1 point
	$v_f = \frac{3}{5}v_0$	
(1 point		
	Using a proper expression for kinetic energy of the two-block system	
	$K = \frac{1}{2}mv^2$	
	$K = \frac{1}{2}(5M)\left(\frac{3}{5}v_0\right)^2$	
	For an answer consistent with part (b)	1 point
	$K = \frac{9}{10}Mv_0^2$	

SCORING GUIDELINES

Question continued)	Distribution of points
4 points	
For a correct expression of the conservation of energy	1 point
$\Delta K_{\text{system}} + \Delta U_{\text{system}} = 0$	
$K_0 = U_{\text{final}}$	
For attempting to integrate the spring force equation	1 point
$\frac{9}{10}Mv_0^2 = -\int_{x_1}^{x_2} -Bx^3 dx$	
$\frac{9}{10}Mv_0^2 = \int_{x_1}^{x_2} Bx^3 dx$	
For using the correct limits of integration or an appropriate constant of integration	1 point
$\frac{9}{10}Mv_0^2 = \int_0^D Bx^3 dx$	
$\frac{9}{10}Mv_0^2 = \left[\frac{Bx^4}{4} \right]_0^D$	
For an answer consistent with the speed from (b) or the kinetic energy from part (c)	1 point
$D = \sqrt[4]{\frac{18Mv_0^2}{5B}}$	
2 points	
For selecting the correct answer "Right" with a reasonable attempt at a justification	1 point
If the incorrect selection is made, no points are earned for the justification.	
For an indication that at maximum compression the block of mass $2M$ has an acceleration to the right due to the forces acting on the block of mass $2M$ or an acceleration to the right due to the external spring force acting on the system of blocks	1 point
Example: At maximum compression the two-block system is instantaneously at rest. The only horizontal external force acting on the system is due to the spring. This force is directed to the right. The system and therefore the block of mass $2M$ is accelerated to the right, which implies that the net force acting on the block of mass $2M$ is also to the right.	

SCORING GUIDELINES

Question continued)

Distribution
of points

2 points

a magnitude of the net force is greater on the block of mass $3M$.

If the incorrect selection is made, no points are earned for the justification.

For an indication that both blocks will have the same acceleration

1 point

For a correct justification for why the net force is greater on the block of mass $3M$

1 point

Example:

Because the blocks stick together, both blocks must have the same acceleration.

Because the block of mass $3M$ has more mass, the net force on it must be greater than the net force on the block of mass $2M$.

2 points

For selecting the correct answer “No,” with a reasonable attempt at a justification

1 point

If the incorrect selection is made, no points are earned for the justification.

If the correct answer is selected without any justification, the point is not earned for the selection.

For an indication that the spring does not apply a linear force and that simple harmonic motion is the resulting motion of a linear restoring force

1 point

$$\left(a = -\frac{k}{m} \Delta x\right)$$

Example:

Because the blocks are sticking together and are attached to the spring, the spring will apply a restoring force to the blocks. However, because the restoring force exerted by a nonlinear spring is not proportional to the blocks' displacement from equilibrium, the blocks do not exhibit simple harmonic motion.

2016 SCORING GUIDELINES

Question

Distribution
of points

15 points total

3 points

For an indication that the spring force equals the mass times the centripetal acceleration

1 point

$$F_s = F_c = ma_c$$

$$kx = mr\omega^2$$

correct substitution for x in the equation

1 point

For a correct substitution for r in the equation that can be used to solve for k

1 point

$$k\left(\frac{d}{2}\right) = m(2d)\omega^2$$

rect answer:

$$k = 4m\omega^2$$

1 point

Substitute values for the block into the equation for rotational inertia

$$I = \sum mr^2 = m(2d)^2$$

For a correct answer or an answer consistent with the radius used in part (a)

1 point

$$I = 4md^2$$

2 points

For an indication that the rotational inertia of the system must include the platform, the rod, and the object

1 point

$$I = I_P + I_R + I_O$$

$$I = \frac{m_P R^2}{2} + \frac{m_R d^2}{3} + mr^2$$

For correctly substituting into the equation the rotational inertia of the platform, the rod, and the object consistent with (b) i.

1 point

$$I = \frac{5m(2d)^2}{2} + \frac{3m d^2}{3} + 4md^2$$

$$I = (10 + 1 + 4)md^2$$

rect answer:

$$I = 15md^2$$

1 point

Using a correct expression of angular momentum

$$L = I\omega$$

For an answer consistent with the answer from part (b) ii.

1 point

$$L = 15md^2\omega$$

SCORING GUIDELINES

Question continued)

Distribution
of points

3 points

For indicating that the spring force equals the mass times the centripetal acceleration

1 point

$$F_s = F_c = ma_c$$

$$kx = mr\omega^2$$

For a correct substitution for k , or a substitution consistent with part (a), in the equation

1 point

For a correct substitution for r in the equation that can be used to solve for x

1 point

$$(4m\omega^2)x = m(d + x)\omega^2$$

$$4x = d + x$$

$$3x = d$$

Correct answer:

$$x = d/3$$

2 points

selecting “Decreasing”

1 point

the wrong selection is made, no points are earned for the justification.

For a correct justification

1 point

Example: The rotational inertia I of the system decreases while the angular velocity ω stays the same. Because the angular momentum is $I\omega$, it decreases.

2 points

For selecting “Negative”

1 point


If the wrong selection is made, no points are earned for the justification.

For a correct justification

1 point

Example: Because the angular velocity is constant and the rotational inertia has decreased, the rotational kinetic energy has decreased. Therefore, work must be negative.

1 point



n arrow starting on the box and pointing down and to the right

1 point