

## Exercise walk-through


Types of programming language, translators and integrated development environments ■ 4.2

eXercise

## You must be able to

- compare high-level and low-level languages
- compare a compiler and an interpreter
- list the tools in an IDE


## Method — Translators

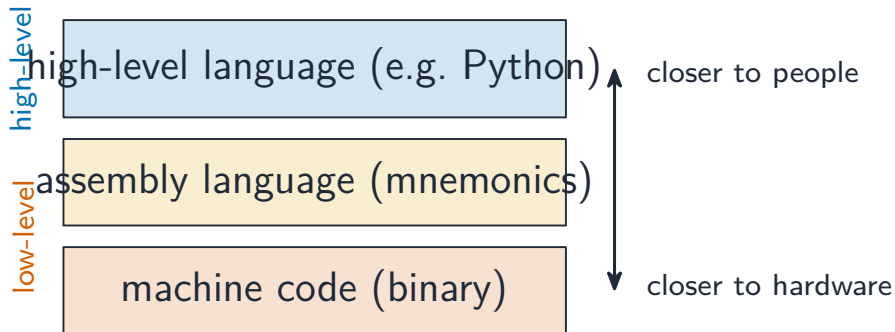

*High-level → assembly → machine code*


# Method — Translators

**Compiler — translate the whole program once**



translated once; the machine code then runs many times

**Interpreter — one line at a time**

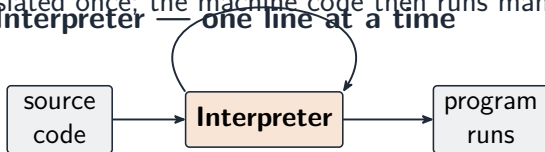

reads, translates and runs one line at a time (every run); stops at the first error

*Compiler (whole program) vs interpreter (line by line)*

## Method — The two internet-security measures the syllabus names

**A firewall 防火墙** sits between the network and the outside. It examines the traffic entering and leaving, compares it with a set of criteria, blocks anything that fails, keeps a log of the traffic, and can block named sites or IP addresses. It can be software, hardware, or both. It cannot stop a threat carried in by an authorised user on a memory stick, and it cannot help if a user gives their password away.

**A proxy server 代理服务器** sits between the user and the internet and passes requests on. The web server sees the proxy's address, not the user's, so it hides the user's identity; it can filter traffic and block unwanted sites; it keeps a **cache** of pages so a repeated request is served quickly; and it can act as a firewall.

**Privacy settings 隐私设置** control what other people and companies can see: who can view a profile, whether location is shared, whether the history is used for advertising. **Secure sockets layer (SSL) and TLS** encrypt the connection to a website, shown by https and a padlock.

## Method — The two internet-security measures the syllabus names

**Worked example.** A school worries about students reaching unsuitable websites and about attacks from outside. Which measure answers which worry? The proxy server filters requests and blocks the unsuitable sites by address, and caches pages that many students open, which also saves bandwidth. The firewall answers the attacks from outside, by examining incoming traffic against its criteria and blocking what does not match, while logging what it sees.

## Practice 2.1 ■ 1 mark

State one advantage of a high-level language.

## Solution 2.1

Method: Translators

### Worked steps

any of: easy to read/write/fix; independent of the computer (runs on any type)

**B1**.

## Practice 2.2 ■ 2 marks

State two tools found in an IDE.

## Solution 2.2

### Worked steps

any two of: code editor; run-time environment; translator; error diagnostics; auto-completion; prettyprinting **B1** **B1**.

## Practice 2.3 ■ 2 marks

Identify two tasks performed by a firewall.

## Solution 2.3

### Worked steps

Any two of: it examines the traffic entering and leaving; it compares that traffic with criteria and blocks what fails; it keeps a log; it blocks named sites or IP addresses **B2**.

## Practice 2.4 ■ 2 marks

Describe how a proxy server hides a user's identity from a website.

## Solution 2.4

Method: The two internet-security measures the syllabus names

### Worked steps

The user's request goes to the proxy first, and the proxy sends it on to the website **B1**; the website sees the proxy's address instead of the user's, so the user's own IP address is hidden **B1**.

## Practice 2.5 ■ 2 marks

Give one threat a firewall cannot protect against, and say why.

## Solution 2.5

Method: The two internet-security measures the syllabus names

### Worked steps

A virus brought in on a memory stick, or a user giving away their password to a phishing message **B1**; the firewall only inspects traffic crossing the network boundary, so it never sees these **B1**.

## Exam-style 3.1 ■ 1 mark

A compiler translates:

- A** one line at a time
- B** the whole program at once
- C** only the errors
- D** nothing

## Solution 3.1

Method: Translators

- A one line at a time
- B the whole program at once
- C only the errors
- D nothing



### Worked steps

- B. A compiler translates the whole program at once.

## Exam-style 3.2 ■ 2 marks

A programmer is writing and testing a new program.

- (a) State whether a compiler or an interpreter is more useful while testing, and why.
- (b) State two differences between a compiler and an interpreter.

## Solution 3.2

### Worked steps

(a) an interpreter **M1**; because it stops at the first error, which helps find mistakes while testing **A1**.

(b) any two of: compiler translates all at once / interpreter line by line; compiler reports all errors at the end / interpreter stops at the first; the compiled program runs faster; the interpreter is needed each time the program runs **B1** **B1**.

## Exam-style 3.3 ■ 3 marks

A company protects its network and its employees' privacy.

- (a) Describe three tasks performed by a firewall.
- (b) Describe two tasks performed by a proxy server that a firewall does not do.
- (c) Explain why a firewall alone cannot keep the network safe, giving one example of a threat it cannot stop.
- (d) Employees use a website that shows `https` and a padlock. Explain what this tells them about the connection.
- (e) Give one privacy setting an employee should check on a social-media account, and explain the risk if it is left open.

## Solution 3.3

Method: The two internet-security measures the syllabus names

### Worked steps

---

- (a) Any three of: it examines traffic entering and leaving the network; it compares that traffic with a set of criteria; it blocks traffic that fails the criteria; it logs traffic for later inspection; it blocks access to named sites or IP addresses **B3**.
- (b) Any two of: it caches web pages so repeated requests load faster and use less bandwidth; it hides the user's IP address from the web server; it filters requests to block unwanted websites **B2**.
- (c) A firewall only inspects traffic crossing the network boundary **B1**; it cannot stop malware carried in on a memory stick, nor a user who gives their password to a

## Solution 3.3

phishing email **B1**.

(d) The connection uses SSL or TLS, so the data between the browser and the server is encrypted **B1**; anyone intercepting it would see only ciphertext, so log-in and payment details are protected **B1**.

(e) Any one of: who can see the profile or posts; whether location is shared; whether the account appears in search **B1**. If left open, strangers can gather personal information to use in social engineering or identity theft **B1**.